

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P845518

Luminaire Tested: SQ2R-FB-050D-835-UNV-STD-W-4

Issue Date: 6/14/2024

Test Information

Test Method: LM-79-2019
Report Number: P845518
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 6/14/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2R-FB-050D-835-UNV-STD-W-4
Description: CONTINUA SQ2 RECESSED, BATWING LENS
500 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2330.9 lumens
Efficiency: N/A
Efficacy: 131.0 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 2.99 / 2.56
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 17.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9973
Total Harmonic Distortion (THDi): 0.0531
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P845518
CATALOG NUMBER: SQ2R-FB-050D-835-UNV-STD-W-4

Luminous Intensity Polar Plot

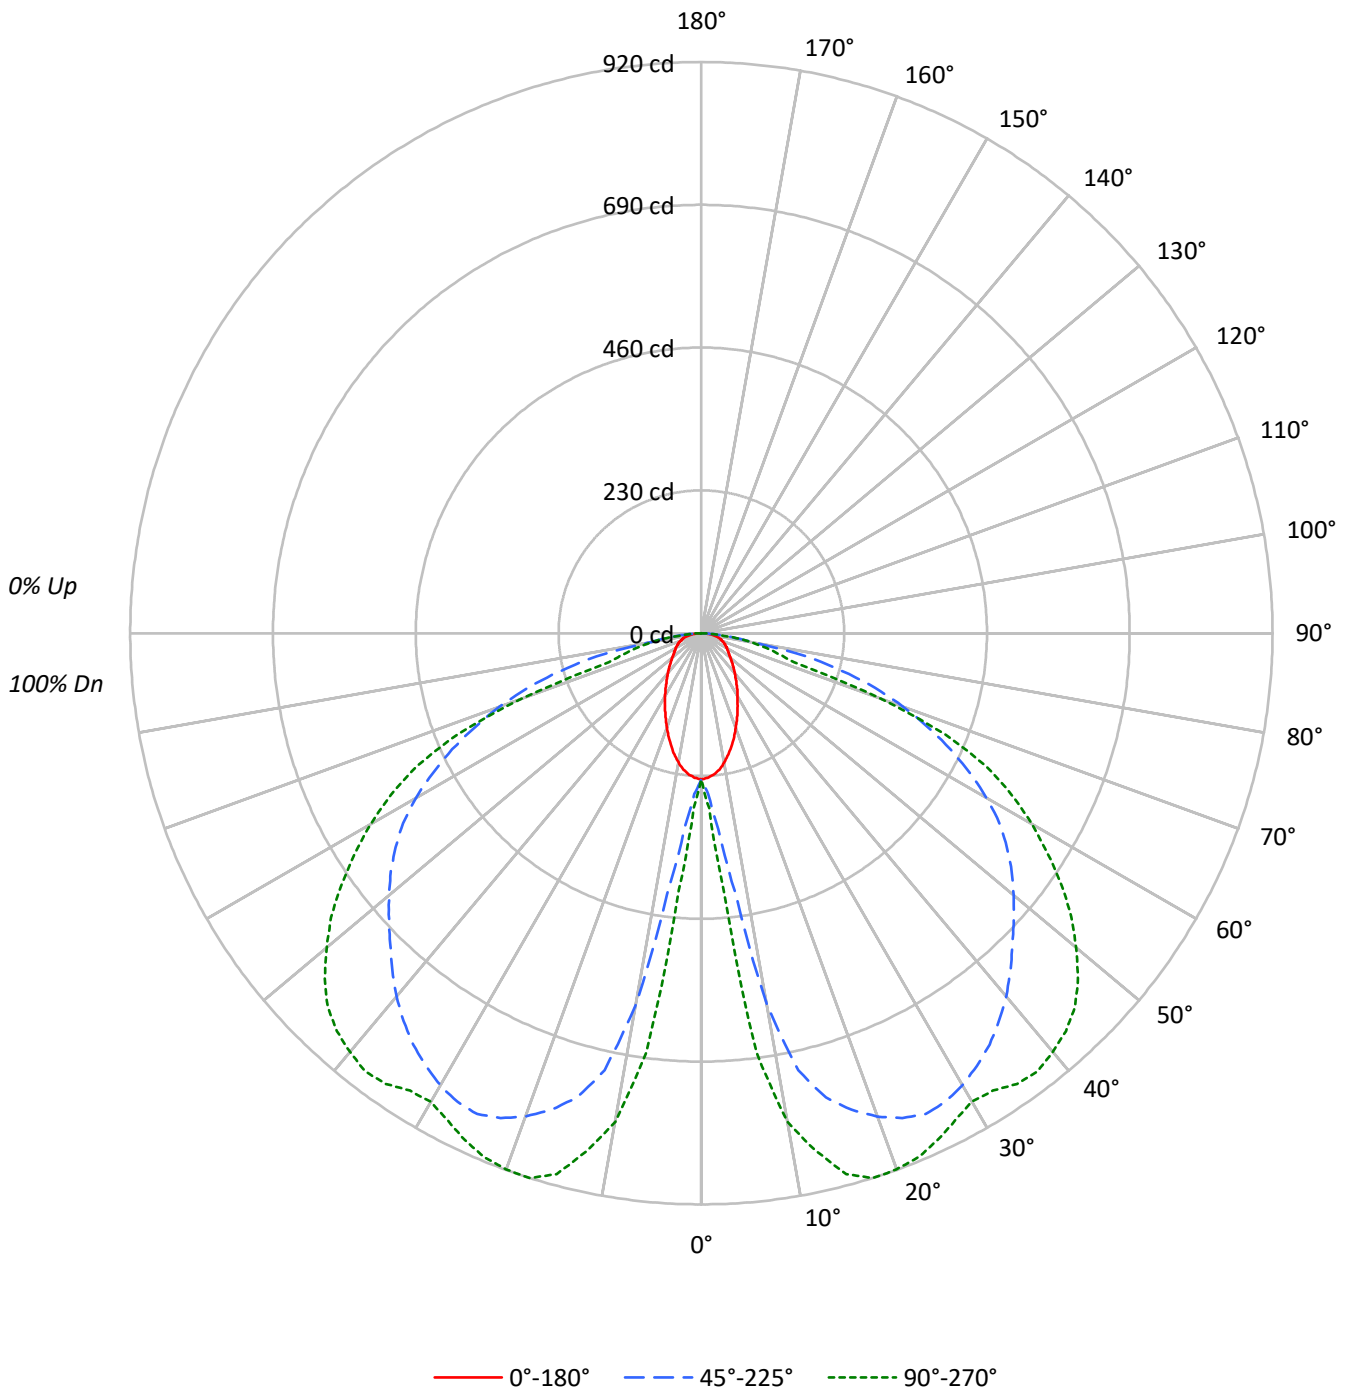



TEST NUMBER: P845518

CATALOG NUMBER: SQ2R-FB-050D-835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84				84
2	98	90	83	77	96	88	82	76	84	79	74	81	77	73	78	74	71	69				69
3	89	78	70	63	87	77	69	63	74	67	62	71	65	60	68	64	59	57				57
4	81	69	60	53	79	67	59	52	65	58	52	63	56	51	60	55	50	48				48
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41				41
6	68	54	45	39	66	53	45	38	52	44	38	50	43	38	48	42	37	35				35
7	63	49	40	34	61	48	40	33	47	39	33	45	38	33	44	37	33	31				31
8	58	44	36	30	57	44	35	29	42	35	29	41	34	29	40	34	29	27				27
9	54	40	32	26	53	40	32	26	39	31	26	38	31	26	37	30	26	24				24
10	51	37	29	23	49	37	29	23	36	28	23	35	28	23	34	28	23	21				21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3801	3801	3801
5°	3705	5136	6731
10°	3469	9945	13100
15°	3141	12939	15076
20°	2780	14234	15789
25°	2460	15221	16048
30°	2174	15676	16246
35°	1941	15948	17465
40°	1764	16101	18556
45°	1628	16175	19431
50°	1535	16488	19783
55°	1498	16915	19941
60°	1534	17137	19843
65°	1601	16905	19282
70°	1657	16348	14582
75°	1834	14685	8047
80°	1897	7578	7466
85°	1890	5243	3149

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 55°
 Luminance: 19941 cd/sqm



TEST NUMBER: P845518

CATALOG NUMBER: SQ2R-FB-050D-835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.8	1.7
10°-20°	180.7	7.8
20°-30°	318.1	13.6
30°-40°	411.3	17.6
40°-50°	453.7	19.5
50°-60°	423.2	18.2
60°-70°	327.5	14.1
70°-80°	149.7	6.4
80°-90°	28.0	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	537.5	23.1
0°-40°	948.8	40.7
0°-60°	1825.8	78.3
0°-90°	2330.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2330.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	235	235	235	235	235	
5°	229	262	317	386	415	21
15°	188	375	774	866	902	52
25°	138	506	854	892	901	63
35°	98	489	809	836	886	62
45°	71	375	708	812	851	55
55°	53	223	601	690	708	48
65°	42	126	442	496	505	41
75°	29	77	235	127	129	30
85°	10	23	28	19	17	11
90°	0	0	0	0	0	



TEST NUMBER: P845518

CATALOG NUMBER: SQ2R-FB-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	235.4	235.4	235.4	235.4	235.4
2.5°	233.1	245.6	259.2	275.0	281.8
5°	228.6	262.5	316.9	385.9	415.3
7.5°	221.8	284.0	424.4	615.6	681.3
10°	211.6	307.8	606.6	767.3	799.0
12.5°	200.3	339.5	720.9	821.6	854.4
15°	187.9	374.6	774.1	865.7	901.9
17.5°	175.4	413.1	804.6	898.5	920.0
20°	161.8	453.8	828.4	906.5	918.9
22.5°	149.4	484.4	845.4	899.7	913.3
25°	138.1	505.9	854.4	891.7	900.8
27.5°	126.7	513.8	851.0	877.0	885.0
30°	116.6	511.5	840.8	858.9	871.4
32.5°	107.5	504.7	826.1	843.1	873.6
35°	98.5	488.9	809.1	836.3	886.1
37.5°	90.5	466.2	787.6	839.7	889.5
40°	83.7	440.2	763.9	839.7	880.4
42.5°	77.0	409.7	736.7	828.4	869.1
45°	71.3	374.6	708.4	812.5	851.0
47.5°	65.6	336.1	682.4	793.3	822.7
50°	61.1	296.5	656.4	765.0	787.6
52.5°	56.6	258.0	630.3	731.1	751.4
55°	53.2	222.9	600.9	690.3	708.4
57.5°	49.8	191.3	569.2	647.3	662.0
60°	47.5	166.4	530.7	599.8	614.5
62.5°	44.1	143.7	487.7	550.0	563.6
65°	41.9	125.6	442.5	495.7	504.7
67.5°	38.5	110.9	394.9	433.4	424.4
70°	35.1	100.7	346.3	357.6	308.9
72.5°	32.8	89.4	293.1	259.2	156.2
75°	29.4	77.0	235.4	126.7	129.0
77.5°	24.9	62.2	173.1	101.8	104.1
80°	20.4	48.7	81.5	79.2	80.3
82.5°	15.8	35.1	49.8	53.2	50.9
85°	10.2	22.6	28.3	19.2	17.0
87.5°	4.5	10.2	5.7	5.7	5.7
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P845518

CATALOG NUMBER: SQ2R-FB-050D-835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.53	17.22	15.90	17.53	17.85	24.19	25.87	24.55	26.19	26.50
	3H	16.32	17.85	16.70	18.17	18.53	25.87	27.40	26.25	27.72	28.08
	4H	16.66	18.09	17.06	18.44	18.81	26.09	27.53	26.49	27.87	28.25
	6H	16.91	18.24	17.32	18.61	19.00	26.22	27.55	26.63	27.91	28.30
	8H	16.99	18.26	17.42	18.65	19.05	26.25	27.52	26.67	27.90	28.30
	12H	17.05	18.27	17.48	18.65	19.08	26.24	27.46	26.67	27.84	28.27
4H	2H	19.97	21.41	20.37	21.75	22.13	24.73	26.16	25.13	26.51	26.88
	3H	20.98	22.19	21.39	22.58	22.98	26.63	27.83	27.04	28.23	28.63
	4H	21.31	22.39	21.74	22.80	23.24	26.91	27.99	27.34	28.40	28.84
	6H	21.49	22.43	21.94	22.87	23.33	27.10	28.05	27.55	28.49	28.94
	8H	21.53	22.42	21.99	22.86	23.32	27.15	28.03	27.61	28.47	28.94
	12H	21.56	22.36	22.04	22.83	23.30	27.16	27.95	27.64	28.43	28.90
8H	4H	22.54	23.43	23.00	23.87	24.33	27.09	27.98	27.55	28.42	28.88
	6H	22.82	23.55	23.31	24.04	24.52	27.34	28.07	27.83	28.56	29.03
	8H	22.91	23.56	23.41	24.07	24.55	27.41	28.06	27.92	28.57	29.06
	12H	22.97	23.55	23.48	24.04	24.60	27.44	28.02	27.95	28.51	29.07
12H	4H	22.60	23.39	23.08	23.87	24.34	27.09	27.88	27.57	28.35	28.82
	6H	22.92	23.58	23.43	24.09	24.57	27.33	27.99	27.84	28.49	28.98
	8H	23.07	23.65	23.58	24.14	24.70	27.44	28.02	27.94	28.51	29.07