

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P845587

Luminaire Tested: SQ2R-PH1-125D-935-UNV-STD-W-4

Issue Date: 6/14/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P845587  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 6/14/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2R-PH1-125D-935-UNV-STD-W-4  
Description: CORELITE SQ2R RECESSED LED LUMINAIRE WITH PERCEIVE HEX CONTINUOUS LENS  
1250 LUMENS PER FOOT  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5607.7 lumens  
Efficiency: N/A  
Efficacy: 114.0 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.03 / 1.23  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 49.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9979  
Total Harmonic Distortion (THDi): 0.0523  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P845587  
CATALOG NUMBER: SQ2R-PH1-125D-935-UNV-STD-W-4

### Luminous Intensity Polar Plot

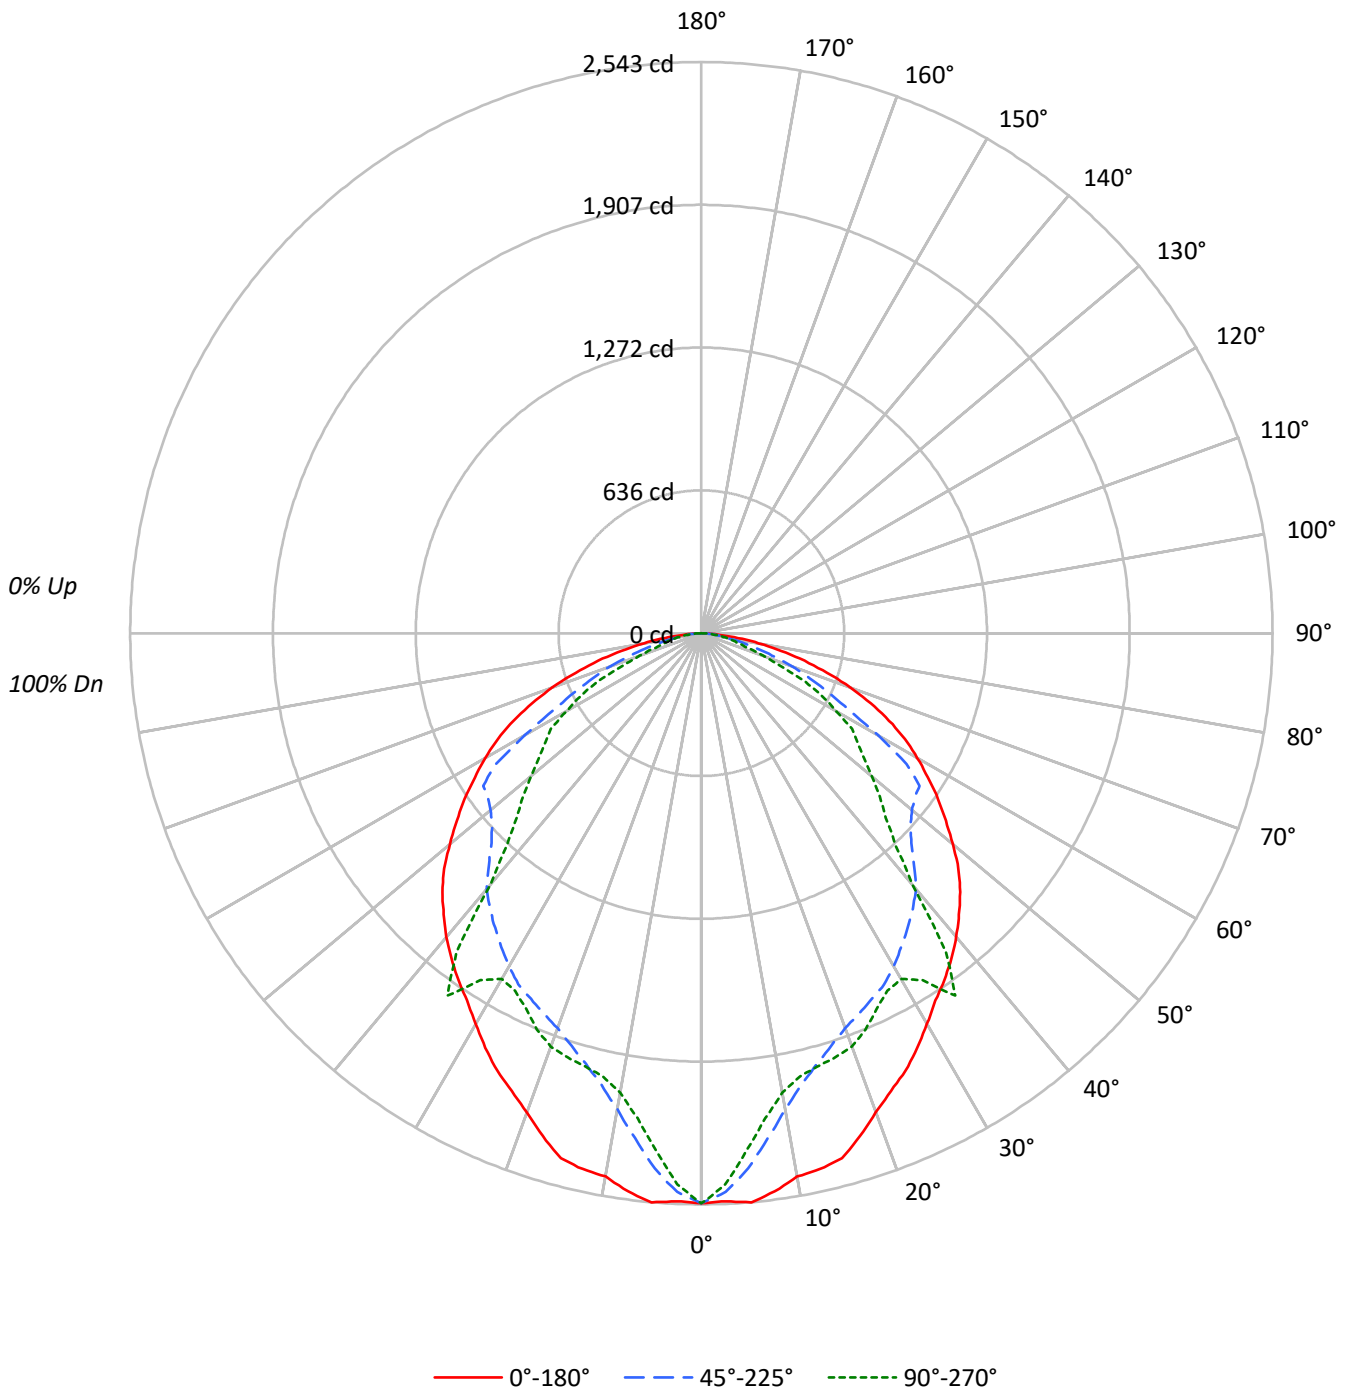



TEST NUMBER: P845587

CATALOG NUMBER: SQ2R-PH1-125D-935-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	99	96	93	95	92	90	91	89	87	85
2	100	92	86	80	97	90	84	79	87	82	77	84	79	76	81	77	74	72
3	91	81	74	67	89	80	73	67	77	71	66	74	69	64	72	67	63	61
4	84	72	64	57	82	71	63	57	69	62	56	66	60	55	64	59	55	53
5	77	65	56	50	75	64	56	49	62	54	49	60	53	48	58	52	48	46
6	72	59	50	44	70	58	49	43	56	48	43	54	48	43	53	47	42	40
7	66	53	45	39	65	52	44	38	51	44	38	49	43	38	48	42	38	36
8	62	49	40	35	60	48	40	34	47	39	34	45	39	34	44	38	34	32
9	58	45	37	31	56	44	36	31	43	36	31	42	35	31	41	35	31	29
10	54	41	34	28	53	41	33	28	40	33	28	39	33	28	38	32	28	26

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	40981	40981	40981
5°	41217	38751	37459
10°	40268	35279	34051
15°	40450	33183	33386
20°	39007	32160	33653
25°	38291	32010	32870
30°	37461	31923	33139
35°	37178	31560	38843
40°	37209	31356	30795
45°	37223	30163	26524
50°	36701	30755	24872
55°	36234	33380	23862
60°	35873	29243	22381
65°	35247	23713	19469
70°	33291	20181	13907
75°	29682	15215	10549
80°	24249	9884	9884
85°	15209	8948	6706

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 37223 cd/sqm

TEST NUMBER: P845587

CATALOG NUMBER: SQ2R-PH1-125D-935-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	223.9	4.0
10°-20°	587.0	10.5
20°-30°	860.9	15.4
30°-40°	1043.5	18.6
40°-50°	1025.1	18.3
50°-60°	893.1	15.9
60°-70°	619.2	11.0
70°-80°	292.2	5.2
80°-90°	62.9	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1671.8	29.8
0°-40°	2715.3	48.4
0°-60°	4633.5	82.6
0°-90°	5607.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5607.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2538	2538	2538	2538	2538	
5°	2543	2541	2391	2316	2311	239
15°	2420	2149	1985	1971	1997	676
25°	2149	1821	1797	1852	1845	989
35°	1886	1517	1601	1734	1971	1181
45°	1630	1198	1321	1372	1162	1254
55°	1287	932	1186	855	848	1150
65°	923	640	621	510	510	908
75°	476	326	244	174	169	504
85°	82	53	48	39	36	108
90°	0	0	0	0	0	



TEST NUMBER: P845587

CATALOG NUMBER: SQ2R-PH1-125D-935-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2538.2	2538.2	2538.2	2538.2	2538.2
2.5°	2531.0	2564.8	2489.9	2460.9	2456.1
5°	2543.1	2540.6	2390.9	2316.0	2311.2
7.5°	2506.8	2441.6	2267.7	2183.2	2178.4
10°	2456.1	2342.6	2151.8	2076.9	2076.9
12.5°	2444.0	2248.4	2057.6	2006.9	2021.4
15°	2419.9	2149.4	1985.2	1970.7	1997.3
17.5°	2347.4	2055.2	1924.8	1948.9	1980.3
20°	2270.2	1982.8	1871.7	1929.6	1958.6
22.5°	2204.9	1912.7	1833.0	1898.2	1910.3
25°	2149.4	1821.0	1796.8	1852.3	1845.1
27.5°	2081.8	1738.8	1763.0	1796.8	1794.4
30°	2009.3	1666.4	1712.3	1746.1	1777.5
32.5°	1939.3	1581.9	1656.7	1748.5	1830.6
35°	1886.2	1516.7	1601.2	1734.0	1970.7
37.5°	1828.2	1437.0	1545.6	1651.9	1789.6
40°	1765.4	1350.0	1487.7	1635.0	1461.1
42.5°	1697.8	1282.4	1400.7	1603.6	1280.0
45°	1630.2	1197.9	1321.0	1371.8	1161.6
47.5°	1552.9	1135.1	1263.1	1166.5	1077.1
50°	1461.1	1072.3	1224.4	1043.3	990.2
52.5°	1371.8	1007.1	1197.9	941.9	910.5
55°	1287.2	932.2	1185.8	854.9	847.7
57.5°	1195.5	857.3	1084.4	775.2	794.6
60°	1110.9	784.9	905.6	707.6	693.1
62.5°	1021.6	714.9	739.0	620.7	606.2
65°	922.6	640.0	620.7	509.6	509.6
67.5°	816.3	562.7	521.7	439.5	376.7
70°	705.2	487.8	427.5	333.3	294.6
72.5°	586.9	408.1	330.9	258.4	212.5
75°	475.8	326.0	243.9	173.9	169.1
77.5°	364.7	248.8	178.7	135.2	135.2
80°	260.8	178.7	106.3	103.8	106.3
82.5°	164.2	108.7	72.5	77.3	77.3
85°	82.1	53.1	48.3	38.6	36.2
87.5°	21.7	19.3	12.1	12.1	12.1
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P845587

CATALOG NUMBER: SQ2R-PH1-125D-935-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	24.04	25.63	24.40	25.94	26.26	22.75	24.34	23.11	24.65	24.97
	3H	26.12	27.55	26.50	27.88	28.24	23.84	25.27	24.21	25.59	25.95
	4H	26.89	28.23	27.28	28.58	28.95	24.08	25.43	24.48	25.77	26.15
	6H	27.41	28.65	27.82	29.02	29.41	24.26	25.51	24.67	25.87	26.26
	8H	27.55	28.74	27.98	29.13	29.53	24.32	25.50	24.74	25.89	26.29
	12H	27.62	28.76	28.05	29.14	29.57	24.34	25.47	24.77	25.85	26.28
4H	2H	24.50	25.85	24.90	26.20	26.57	23.48	24.82	23.87	25.17	25.54
	3H	26.67	27.79	27.08	28.19	28.59	24.72	25.84	25.13	26.24	26.64
	4H	27.52	28.53	27.95	28.94	29.38	25.03	26.03	25.46	26.45	26.89
	6H	28.15	29.02	28.60	29.46	29.92	25.27	26.15	25.73	26.59	27.05
	8H	28.33	29.15	28.79	29.59	30.06	25.35	26.17	25.81	26.61	27.07
	12H	28.43	29.17	28.92	29.64	30.11	25.39	26.12	25.87	26.60	27.07
8H	4H	27.59	28.41	28.06	28.86	29.32	25.30	26.11	25.76	26.56	27.02
	6H	28.28	28.95	28.77	29.44	29.92	25.60	26.27	26.09	26.76	27.24
	8H	28.51	29.11	29.02	29.62	30.11	25.71	26.31	26.22	26.82	27.31
	12H	28.65	29.19	29.16	29.68	30.24	25.78	26.32	26.29	26.81	27.37
12H	4H	27.58	28.31	28.06	28.79	29.26	25.33	26.06	25.81	26.54	27.01
	6H	28.25	28.86	28.77	29.37	29.86	25.63	26.24	26.14	26.75	27.23
	8H	28.52	29.06	29.03	29.55	30.11	25.78	26.32	26.29	26.81	27.37