

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P845513

Luminaire Tested: SQ2R-FA-125D-840-UNV-STD-W-4

Issue Date: 6/14/2024

Test Information

Test Method: LM-79-2019
Report Number: P845513
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-11)
Test Lab: INNOVATION CENTER
Issue Date: 6/14/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2R-FA-125D-840-UNV-STD-W-4
Description: CONTINUA SQ2 RECESSED, ASYMMETRIC LENS
1250 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5444.8 lumens
Efficiency: N/A
Efficacy: 110.7 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 0.95 / 0.93
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 49.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9979
Total Harmonic Distortion (THDi): 0.0523
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P845513
CATALOG NUMBER: SQ2R-FA-125D-840-UNV-STD-W-4

Luminous Intensity Polar Plot

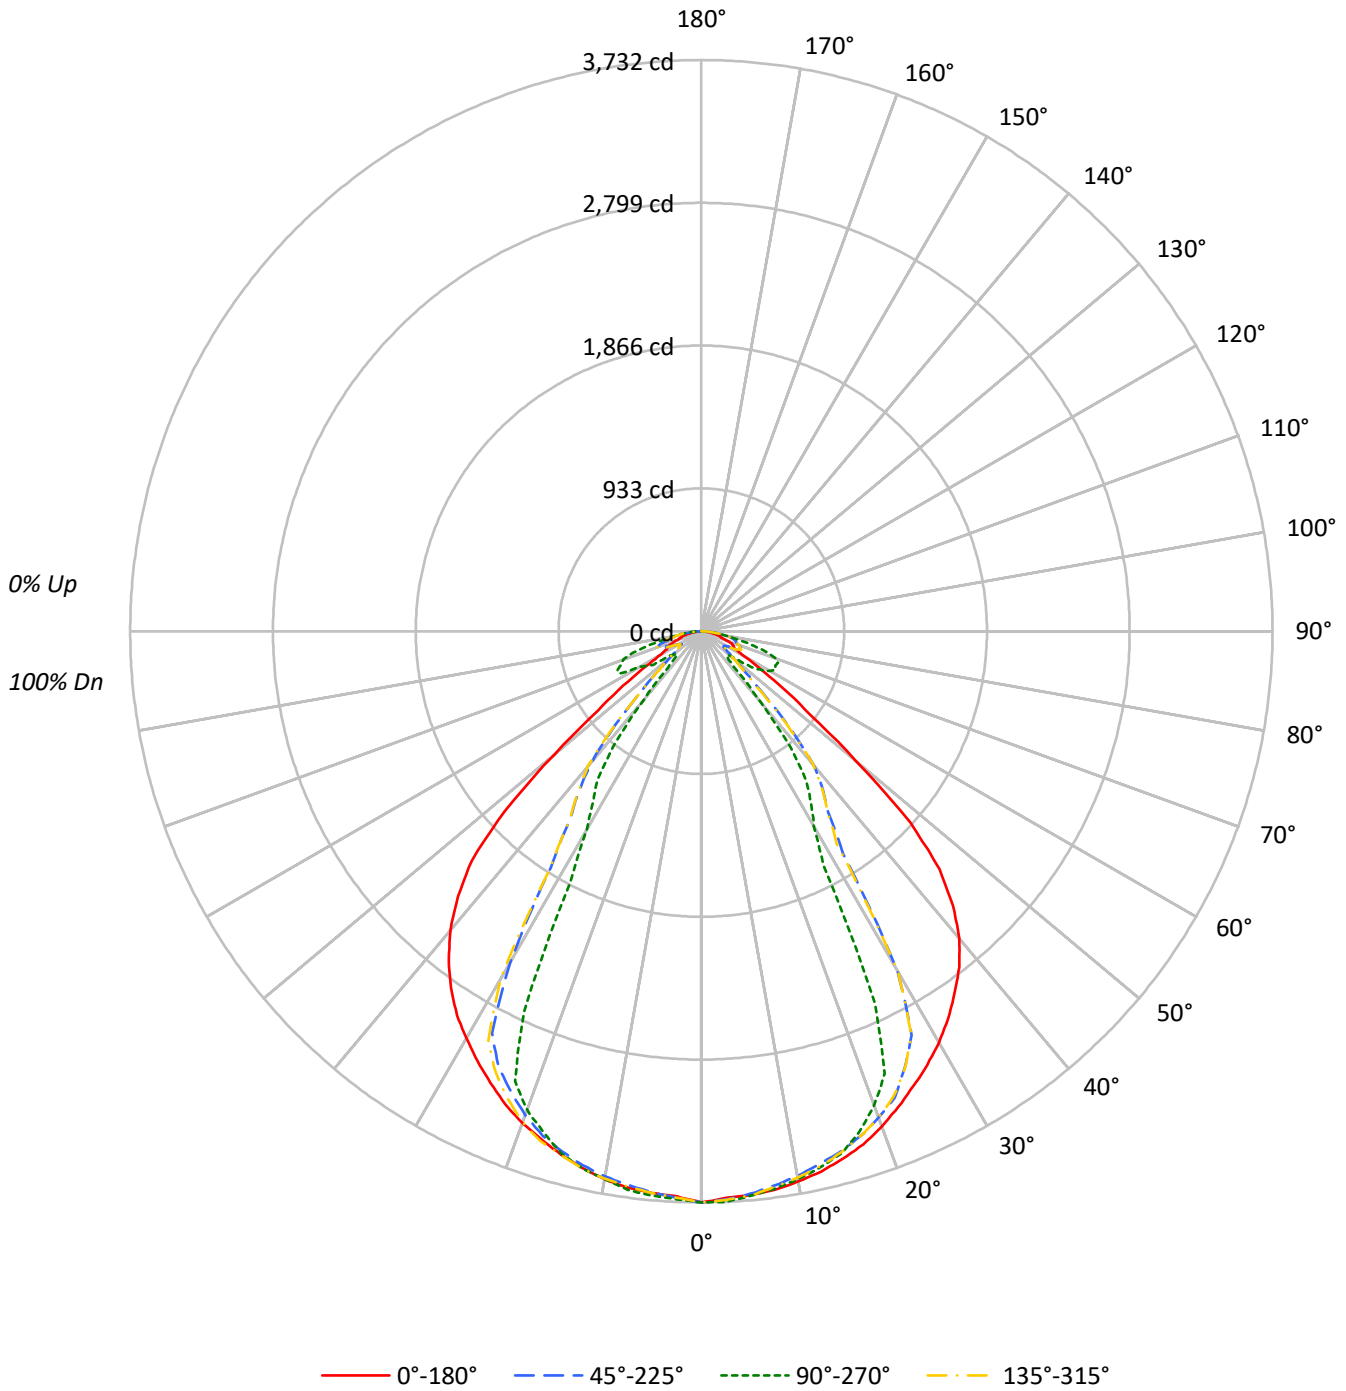



TEST NUMBER: P845513

CATALOG NUMBER: SQ2R-FA-125D-840-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88				88
2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78				78
3	96	88	81	76	94	86	80	75	84	78	74	81	77	73	79	75	72	70				70
4	90	80	73	68	88	79	72	67	77	71	66	75	70	66	73	68	65	63				63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57				57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52				52
7	74	63	56	50	73	62	55	50	61	55	50	60	54	50	58	53	49	48				48
8	70	59	51	46	69	58	51	46	57	50	46	56	50	46	55	49	46	44				44
9	66	55	48	43	65	54	47	43	53	47	43	52	46	42	51	46	42	41				41
10	63	51	44	40	61	51	44	40	50	44	40	49	43	39	48	43	39	38				38

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	60256	60256	60256	60256
5°	59940	60031	59712	59986
10°	59848	59617	59617	59617
15°	59654	59042	59183	59042
20°	59192	56677	58756	57209
25°	58413	47833	58013	48836
30°	57877	27443	57247	27811
35°	56863	23578	56141	23245
40°	55287	12397	53744	12279
45°	50255	5334	48455	5334
50°	33156	6433	31461	6008
55°	18539	11885	17588	10776
60°	9998	16724	9817	14996
65°	8818	20321	9245	23117
70°	8238	24316	7841	25643
75°	7723	20892	7904	21597
80°	6546	14914	6546	15704
85°	5743	8336	5206	9911

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 50255 cd/sqm



TEST NUMBER: P845513

CATALOG NUMBER: SQ2R-FA-125D-840-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	351.5	6.5
10°-20°	997.4	18.3
20°-30°	1364.3	25.1
30°-40°	1142.5	21.0
40°-50°	640.4	11.8
50°-60°	339.6	6.2
60°-70°	316.7	5.8
70°-80°	232.9	4.3
80°-90°	59.6	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2713.1	49.8
0°-40°	3855.6	70.8
0°-60°	4835.6	88.8
0°-90°	5444.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5444.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3732	3732	3732	3732	3732	
5°	3698	3704	3684	3701	3698	352
15°	3569	3532	3541	3532	3569	1007
25°	3279	2685	3256	2741	3279	1513
35°	2885	1196	2848	1179	2885	1803
45°	2201	234	2122	234	2201	1624
55°	659	422	625	383	659	622
65°	231	532	242	605	231	231
75°	124	335	127	346	124	127
85°	31	45	28	54	31	36
90°	0	0	0	0	0	



TEST NUMBER: P845513

CATALOG NUMBER: SQ2R-FA-125D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	3732.0	3732.0	3732.0	3732.0	3732.0	3732.0	3732.0	3732.0	3732.0	3732.0	3732.0
2.5°	3706.7	3777.1	3715.1	3706.7	3732.0	3726.4	3718.0	3751.7	3695.4	3751.7	3706.7
5°	3698.3	3763.0	3689.8	3670.1	3703.9	3681.4	3701.1	3740.5	3684.2	3734.8	3678.6
7.5°	3681.4	3740.5	3653.2	3639.2	3672.9	3653.2	3661.7	3715.1	3667.3	3701.1	3650.4
10°	3650.4	3701.1	3613.8	3605.4	3636.3	3616.6	3625.1	3681.4	3636.3	3667.3	3616.6
12.5°	3616.6	3653.2	3566.0	3563.2	3588.5	3577.2	3580.1	3625.1	3591.3	3622.3	3574.4
15°	3568.8	3605.4	3518.1	3504.1	3532.2	3520.9	3526.6	3568.8	3540.6	3560.4	3518.1
17.5°	3515.3	3543.5	3459.0	3428.1	3430.9	3445.0	3459.0	3509.7	3481.5	3506.9	3453.4
20°	3445.0	3478.7	3383.0	3304.2	3298.6	3312.7	3383.0	3433.7	3419.6	3447.8	3363.3
22.5°	3363.3	3383.0	3298.6	3152.2	3129.7	3143.8	3287.3	3349.3	3346.4	3363.3	3253.6
25°	3278.9	3301.4	3143.8	2958.0	2685.0	2941.2	3149.4	3256.4	3256.4	3273.3	3135.4
27.5°	3194.5	3200.1	2974.9	1992.7	1722.5	1911.0	2969.3	3143.8	3166.3	3163.5	2960.9
30°	3104.4	3084.7	2564.0	1533.9	1472.0	1511.4	2566.8	3025.6	3070.6	3039.7	2499.3
32.5°	3000.3	2935.5	1725.3	1379.1	1331.3	1365.0	1646.5	2884.9	2972.1	2896.1	1832.2
35°	2884.9	2738.5	1443.8	1246.8	1196.2	1241.2	1432.6	2690.7	2848.3	2668.2	1491.7
37.5°	2766.7	2285.4	1303.1	1061.1	959.7	1044.2	1297.5	2276.9	2710.4	2181.2	1308.7
40°	2623.1	1691.5	1142.7	729.0	588.2	686.7	1134.2	1612.7	2549.9	1739.4	1114.5
42.5°	2431.7	1429.8	861.2	396.8	304.0	357.4	816.2	1407.3	2352.9	1443.8	830.3
45°	2200.9	1272.2	543.2	253.3	233.6	244.9	501.0	1249.6	2122.1	1221.5	554.5
47.5°	1849.1	1021.7	368.7	213.9	230.8	213.9	357.4	990.7	1745.0	971.0	368.7
50°	1320.0	757.1	270.2	216.7	256.1	216.7	261.7	731.8	1252.5	802.1	267.4
52.5°	892.2	605.1	208.3	242.0	320.9	247.7	202.6	591.0	847.2	610.7	194.2
55°	658.6	501.0	177.3	312.4	422.2	320.9	177.3	486.9	624.8	481.3	171.7
57.5°	444.7	394.0	174.5	396.8	472.8	405.3	177.3	380.0	425.0	382.8	154.8
60°	309.6	295.5	199.8	427.8	517.9	433.4	202.6	284.3	304.0	281.5	168.9
62.5°	242.0	216.7	250.5	472.8	543.2	456.0	256.1	205.5	256.1	194.2	191.4
65°	230.8	149.2	284.3	470.0	531.9	470.0	287.1	140.7	242.0	152.0	253.3
67.5°	216.7	112.6	278.6	464.4	540.4	470.0	270.2	107.0	208.3	104.1	247.7
70°	174.5	98.5	258.9	475.7	515.1	458.8	258.9	95.7	166.1	92.9	304.0
72.5°	137.9	92.9	236.4	430.6	441.9	413.7	239.2	92.9	140.7	81.6	281.5
75°	123.8	92.9	230.8	351.8	334.9	334.9	225.2	90.1	126.7	84.4	222.3
77.5°	98.5	84.4	199.8	244.9	230.8	230.8	197.0	81.6	92.9	76.0	188.6
80°	70.4	76.0	157.6	168.9	160.4	160.4	152.0	73.2	70.4	70.4	149.2
82.5°	50.7	61.9	112.6	112.6	107.0	104.1	109.8	61.9	50.7	56.3	107.0
85°	31.0	45.0	64.7	53.5	45.0	42.2	61.9	42.2	28.1	42.2	61.9
87.5°	14.1	25.3	11.3	11.3	11.3	11.3	11.3	25.3	14.1	22.5	14.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P845513

CATALOG NUMBER: SQ2R-FA-125D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	3732.0	3732.0	3732.0	3732.0	3732.0	3732.0
2.5°	3695.4	3715.1	3715.1	3703.9	3760.2	3706.7
5°	3664.5	3701.1	3684.2	3684.2	3740.5	3698.3
7.5°	3644.8	3681.4	3664.5	3658.9	3715.1	3681.4
10°	3611.0	3636.3	3625.1	3633.5	3684.2	3650.4
12.5°	3563.2	3594.1	3582.9	3596.9	3642.0	3616.6
15°	3506.9	3532.2	3537.8	3543.5	3596.9	3568.8
17.5°	3419.6	3430.9	3461.8	3492.8	3546.3	3515.3
20°	3312.7	3329.6	3346.4	3414.0	3478.7	3445.0
22.5°	3191.7	3180.4	3225.4	3307.0	3391.5	3363.3
25°	2958.0	2741.3	2980.6	3180.4	3287.3	3278.9
27.5°	2172.8	1857.6	2133.4	3014.3	3183.2	3194.5
30°	1621.2	1491.7	1618.3	2620.3	3065.0	3104.4
32.5°	1393.2	1314.4	1379.1	1837.9	2915.8	3000.3
35°	1241.2	1179.3	1241.2	1491.7	2710.4	2884.9
37.5°	1058.3	940.0	1061.1	1322.8	2293.8	2766.7
40°	743.0	582.6	720.5	1153.9	1733.7	2623.1
42.5°	433.4	323.7	405.3	847.2	1435.4	2431.7
45°	267.4	233.6	256.1	548.8	1215.9	2200.9
47.5°	211.1	216.7	211.1	365.9	968.2	1849.1
50°	199.8	239.2	199.8	267.4	771.2	1320.0
52.5°	222.3	264.6	219.5	197.0	596.7	892.2
55°	244.9	382.8	247.7	171.7	464.4	658.6
57.5°	349.0	422.2	354.6	160.4	380.0	444.7
60°	360.3	464.4	357.4	171.7	278.6	309.6
62.5°	441.9	602.3	441.9	202.6	188.6	242.0
65°	548.8	605.1	554.5	250.5	146.4	230.8
67.5°	523.5	565.7	517.9	258.9	101.3	216.7
70°	512.2	543.2	506.6	306.8	92.9	174.5
72.5°	470.0	467.2	458.8	278.6	81.6	137.9
75°	371.5	346.2	357.4	244.9	84.4	123.8
77.5°	244.9	233.6	236.4	194.2	76.0	98.5
80°	174.5	168.9	166.1	157.6	70.4	70.4
82.5°	118.2	112.6	109.8	112.6	56.3	50.7
85°	59.1	53.5	50.7	70.4	42.2	31.0
87.5°	14.1	14.1	11.3	14.1	19.7	14.1
90°	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P845513

CATALOG NUMBER: SQ2R-FA-125D-840-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.22	19.53	18.59	19.84	20.16	17.07	18.37	17.43	18.69	19.00
	3H	18.94	20.11	19.32	20.44	20.81	23.27	24.44	23.65	24.77	25.13
	4H	19.37	20.47	19.77	20.82	21.20	24.57	25.66	24.97	26.01	26.39
	6H	19.75	20.76	20.16	21.13	21.52	25.19	26.20	25.61	26.57	26.96
	8H	19.88	20.83	20.31	21.22	21.63	25.33	26.28	25.76	26.68	27.08
	12H	19.96	20.88	20.39	21.26	21.69	25.38	26.30	25.81	26.68	27.11
4H	2H	18.66	19.76	19.07	20.11	20.49	17.65	18.74	18.05	19.09	19.48
	3H	19.68	20.59	20.09	20.99	21.40	24.02	24.93	24.43	25.33	25.74
	4H	20.25	21.07	20.69	21.49	21.93	25.48	26.30	25.92	26.72	27.17
	6H	20.75	21.46	21.21	21.91	22.37	26.24	26.95	26.70	27.40	27.86
	8H	20.93	21.59	21.40	22.04	22.51	26.42	27.08	26.88	27.53	28.00
	12H	21.07	21.65	21.55	22.14	22.61	26.50	27.08	26.98	27.57	28.04
8H	4H	21.38	22.05	21.85	22.49	22.97	25.63	26.30	26.10	26.74	27.21
	6H	22.01	22.55	22.51	23.05	23.53	26.53	27.07	27.03	27.56	28.04
	8H	22.24	22.73	22.76	23.24	23.73	26.77	27.26	27.29	27.77	28.27
	12H	22.44	22.86	22.95	23.36	23.93	26.92	27.34	27.43	27.84	28.41
12H	4H	21.55	22.14	22.04	22.62	23.09	25.61	26.20	26.10	26.68	27.16
	6H	22.28	22.77	22.80	23.28	23.77	26.53	27.02	27.05	27.53	28.02
	8H	22.60	23.03	23.12	23.52	24.10	26.83	27.26	27.35	27.75	28.33