

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P824244

Luminaire Tested: CB2-D-125U-055D-830-1D-UNV-STD-W-4

Issue Date: 4/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P824244  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2312-242-13, G2-2312-242-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 4/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB2-D-125U-055D-830-1D-UNV-STD-W-4  
Description: CORELITE Bryx SLOT LED LUMINAIRE, UPLIGHT DIFFUSER DUST COVER  
2-INCH APERTURE  
DOWNLIGHT 550 LUMENS PER FOOT  
UPLIGHT 1250 LUMENS PER FOOT  
Light Source: 80 CRI, 3000K CCT LEDS  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6650.8 lumens  
Efficiency: N/A  
Efficacy: 115.7 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 57.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P824244

CATALOG NUMBER: CB2-D-125U-055D-830-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

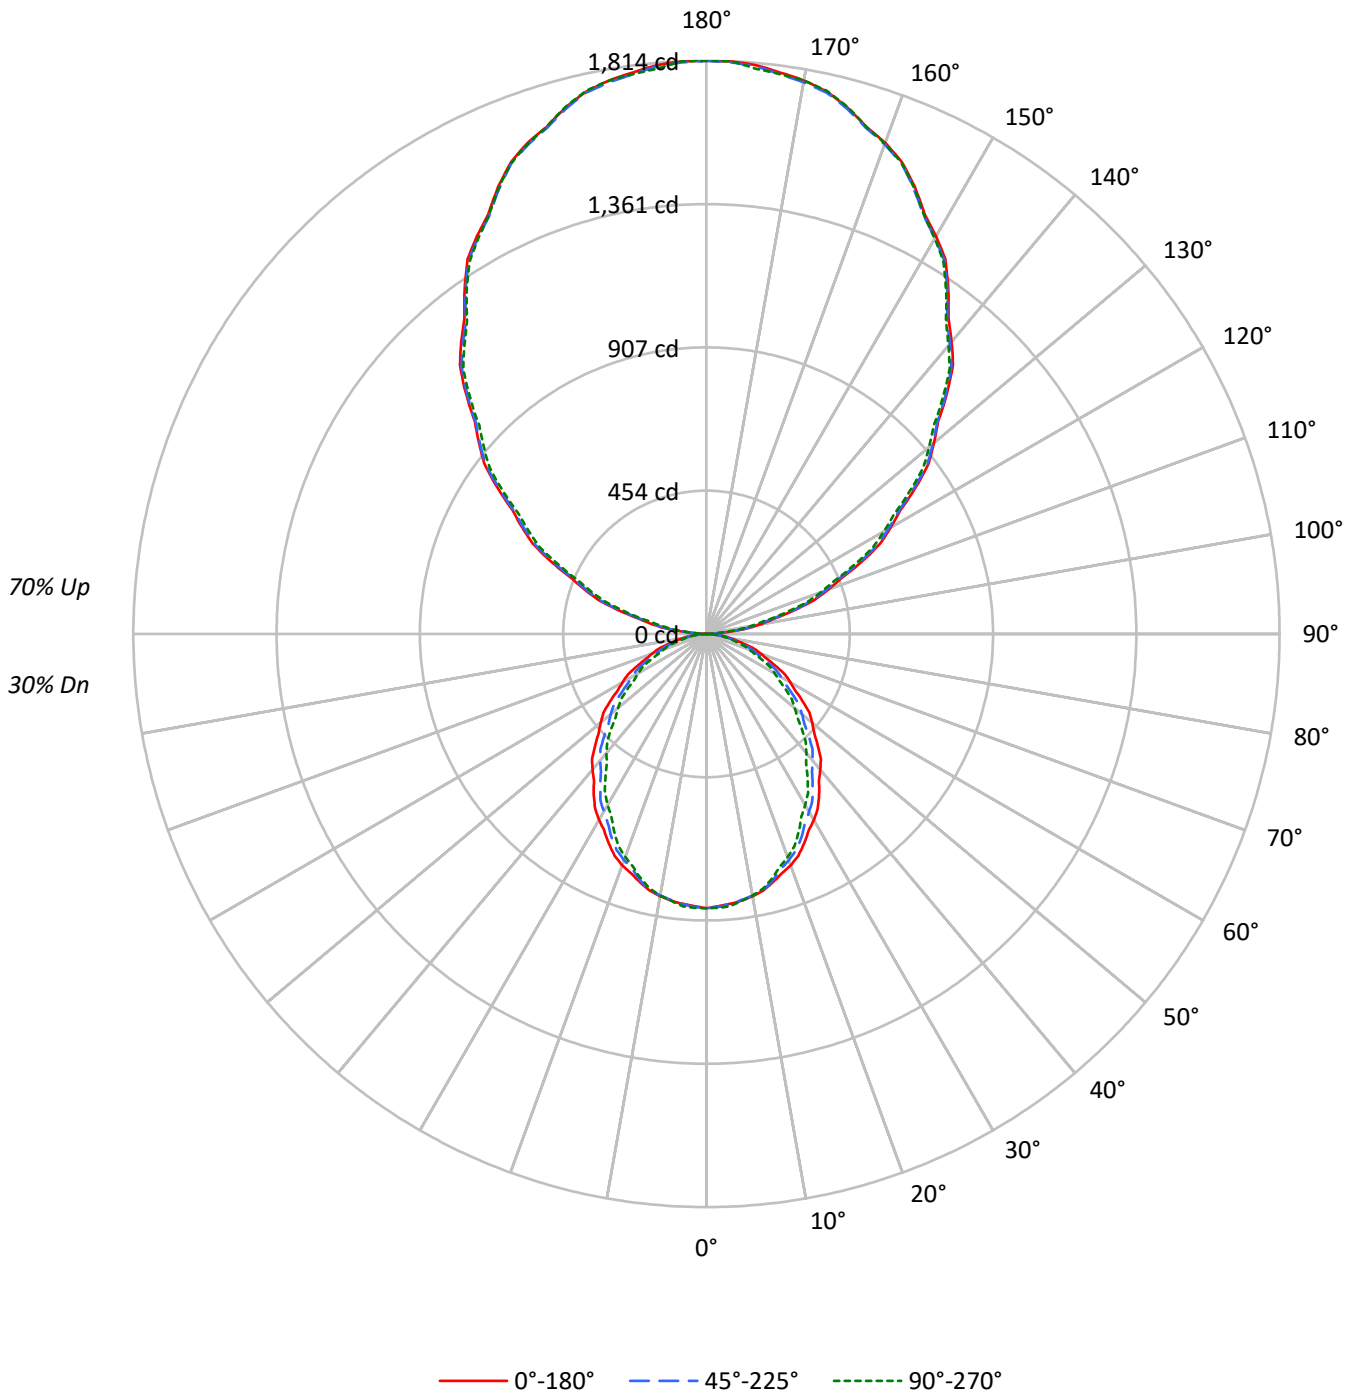



TEST NUMBER: P824244

CATALOG NUMBER: CB2-D-125U-055D-830-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	55	55	55	38	38	38	30
1	94	89	86	82	84	80	77	74	64	61	60	48	47	46	34	33	32	26
2	85	78	72	67	76	70	65	61	56	52	49	42	40	38	30	29	27	22
3	78	69	62	56	70	62	56	51	49	45	42	38	35	32	27	25	23	19
4	71	61	53	47	64	55	48	43	44	39	35	33	30	28	24	22	20	16
5	65	54	46	41	58	49	42	37	39	34	31	30	27	24	21	19	18	14
6	60	48	41	35	54	44	37	32	35	30	27	27	24	21	20	17	16	12
7	55	44	36	31	50	40	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	21	22	19	17	16	14	12	10
9	48	36	29	24	43	33	26	22	26	22	18	21	17	15	15	13	11	9
10	45	33	26	21	40	30	24	20	24	20	17	19	16	13	14	12	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15120	15120	15120
5°	14992	15015	15120
10°	14908	14872	14860
15°	14671	14575	14454
20°	14439	14120	13922
25°	14052	13656	13272
30°	13662	13061	12566
35°	13215	12451	11858
40°	12742	11880	11184
45°	12264	11281	10528
50°	11833	10698	9888
55°	11302	10094	9286
60°	10698	9517	8684
65°	10056	8877	8082
70°	9345	8158	7313
75°	8499	7382	6622
80°	7603	6470	5998
85°	5835	5316	4377

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12264 cd/sqm



TEST NUMBER: P824244

CATALOG NUMBER: CB2-D-125U-055D-830-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.6	1.2
10°-20°	227.6	3.4
20°-30°	327.2	4.9
30°-40°	367.8	5.5
40°-50°	355.3	5.3
50°-60°	300.2	4.5
60°-70°	215.6	3.2
70°-80°	117.8	1.8
80°-90°	31.4	0.5
90°-100°	70.1	1.1
100°-110°	289.0	4.3
110°-120°	524.7	7.9
120°-130°	714.0	10.7
130°-140°	824.2	12.4
140°-150°	830.5	12.5
150°-160°	716.7	10.8
160°-170°	485.8	7.3
170°-180°	171.4	2.6
0°-30°	636.4	9.6
0°-40°	1004.2	15.1
0°-60°	1659.6	25.0
0°-90°	2024.5	30.4
90°-120°	883.8	13.3
90°-150°	3252.4	48.9
90°-180°	4626.0	69.6
0°-180°	6650.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	868	868	868	868	868	
5°	858	869	859	859	865	81
15°	814	821	808	800	802	229
25°	731	732	711	694	691	337
35°	622	614	586	563	558	388
45°	498	488	458	434	427	385
55°	372	359	332	312	306	333
65°	244	235	215	200	196	242
75°	126	118	110	101	98	135
85°	29	27	27	23	22	35
90°	0	0	1	0	1	3
95°	68	60	57	44	44	79
105°	286	282	274	259	256	303
115°	543	542	532	516	515	536
125°	808	816	800	782	784	721
135°	1077	1089	1071	1052	1058	829
145°	1334	1350	1329	1313	1323	834
155°	1561	1576	1554	1544	1556	718
165°	1725	1743	1721	1711	1726	486
175°	1807	1826	1803	1792	1796	171
180°	1814	1814	1814	1814	1814	

TEST NUMBER: P824244

CATALOG NUMBER: CB2-D-125U-055D-830-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	868.1	868.1	868.1	868.1	868.1
2.5°	862.3	872.7	864.9	866.0	867.6
5°	857.5	869.2	858.8	858.9	864.8
7.5°	851.4	862.4	849.4	847.0	852.4
10°	842.9	853.9	840.9	836.3	840.2
12.5°	831.7	842.2	829.7	822.5	825.8
15°	813.6	820.8	808.3	800.3	801.6
17.5°	793.9	798.4	780.4	773.7	772.4
20°	779.0	782.9	761.8	752.4	751.1
22.5°	759.9	763.3	741.0	729.6	727.7
25°	731.2	731.8	710.6	694.5	690.6
27.5°	701.1	699.1	675.5	656.5	651.4
30°	679.3	676.7	649.4	629.4	624.8
32.5°	655.9	651.3	623.9	602.3	597.7
35°	621.5	614.4	585.6	562.9	557.7
37.5°	584.8	576.8	548.5	523.8	517.9
40°	560.4	551.3	522.5	497.7	491.9
42.5°	535.9	525.8	496.4	471.7	465.3
45°	497.9	487.5	458.0	433.9	427.4
47.5°	461.7	448.5	419.8	395.9	389.4
50°	436.7	422.4	394.8	371.4	364.9
52.5°	411.2	396.4	369.8	347.5	341.0
55°	372.2	358.6	332.4	311.6	305.8
57.5°	333.7	320.6	296.6	276.8	271.1
60°	307.1	296.0	273.2	254.5	249.3
62.5°	281.6	271.6	249.8	232.7	227.5
65°	244.0	234.9	215.4	200.0	196.1
67.5°	207.4	198.3	182.5	168.7	164.3
70°	183.5	174.4	160.2	147.5	143.6
72.5°	160.6	151.0	139.5	127.8	125.0
75°	126.3	118.5	109.7	101.0	98.4
77.5°	96.0	88.4	82.0	75.9	75.2
80°	75.8	69.3	64.5	60.5	59.8
82.5°	56.6	51.7	48.5	45.6	45.5
85°	29.2	27.3	26.6	23.2	21.9
87.5°	8.5	8.5	7.7	6.4	6.7
90°	0.0	0.0	1.4	0.0	1.4
92.5°	17.0	14.8	13.9	9.1	10.5
95°	67.9	59.6	56.6	43.9	43.9
97.5°	128.2	119.9	115.5	102.4	99.6
100°	171.2	162.9	158.5	144.3	141.5
102.5°	215.4	211.5	203.8	188.4	185.6
105°	285.8	281.7	274.5	258.9	256.1
107.5°	358.3	359.1	348.4	335.5	331.7
110°	410.3	409.0	400.4	387.6	384.9



TEST NUMBER: P824244

CATALOG NUMBER: CB2-D-125U-055D-830-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	463.5	461.1	452.5	439.7	436.9
115°	543.4	542.0	532.0	516.4	515.1
117.5°	619.2	623.6	611.8	595.4	594.9
120°	673.5	679.1	665.0	650.8	648.1
122.5°	726.7	733.4	719.4	703.0	703.5
125°	808.0	816.3	799.5	782.5	783.9
127.5°	886.3	896.6	881.0	863.7	865.4
130°	939.6	952.0	935.3	917.0	919.7
132.5°	993.9	1006.3	989.6	970.2	975.2
135°	1076.8	1089.3	1071.1	1051.5	1058.4
137.5°	1154.9	1167.4	1147.6	1131.0	1139.3
140°	1207.0	1219.4	1198.5	1183.1	1191.4
142.5°	1257.9	1272.6	1250.6	1234.1	1244.6
145°	1334.3	1349.5	1328.7	1313.3	1323.0
147.5°	1406.8	1422.0	1400.8	1386.1	1396.0
150°	1453.2	1468.4	1446.1	1433.6	1444.7
152.5°	1496.2	1513.6	1490.3	1477.9	1492.2
155°	1560.7	1575.9	1553.7	1544.0	1556.5
157.5°	1616.8	1634.5	1612.2	1604.0	1613.9
160°	1654.1	1670.7	1648.5	1640.2	1651.3
162.5°	1682.4	1700.1	1679.0	1669.7	1683.0
165°	1724.9	1742.9	1720.6	1711.1	1726.3
167.5°	1758.3	1777.4	1754.9	1745.0	1760.5
170°	1778.6	1796.6	1773.0	1762.0	1778.6
172.5°	1792.2	1811.3	1786.6	1775.5	1786.6
175°	1806.9	1826.3	1802.7	1791.5	1795.6
177.5°	1814.0	1829.5	1810.6	1800.7	1814.0
180°	1814.0	1814.0	1814.0	1814.0	1814.0



TEST NUMBER: P824244  
 CATALOG NUMBER: CB2-D-125U-055D-830-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.28	14.98	15.39	16.09	17.61	13.18	13.88	14.29	14.99	16.51
	3H	15.91	16.54	17.03	17.66	19.20	14.70	15.32	15.81	16.44	17.98
	4H	16.53	17.13	17.66	18.25	19.79	15.26	15.86	16.39	16.97	18.52
	6H	16.93	17.48	18.07	18.59	20.15	15.62	16.17	16.76	17.29	18.85
	8H	17.07	17.59	18.21	18.73	20.28	15.76	16.28	16.90	17.41	18.97
	12H	17.14	17.64	18.28	18.76	20.34	15.82	16.31	16.96	17.44	19.02
4H	2H	14.67	15.27	15.81	16.38	17.93	13.79	14.39	14.93	15.51	17.05
	3H	16.52	17.02	17.67	18.16	19.72	15.52	16.01	16.66	17.15	18.71
	4H	17.26	17.72	18.41	18.85	20.43	16.18	16.64	17.33	17.77	19.35
	6H	17.77	18.17	18.93	19.32	20.89	16.65	17.04	17.80	18.19	19.76
	8H	17.98	18.34	19.13	19.49	21.07	16.84	17.20	17.99	18.34	19.93
	12H	18.07	18.41	19.24	19.56	21.15	16.92	17.25	18.08	18.40	19.99
8H	4H	17.41	17.77	18.56	18.92	20.51	16.44	16.81	17.59	17.95	19.54
	6H	18.04	18.35	19.21	19.53	21.12	17.04	17.34	18.21	18.53	20.11
	8H	18.33	18.60	19.51	19.76	21.37	17.32	17.58	18.49	18.74	20.35
	12H	18.50	18.73	19.68	19.89	21.53	17.46	17.69	18.64	18.85	20.49
12H	4H	17.38	17.71	18.55	18.87	20.46	16.44	16.77	17.61	17.93	19.52
	6H	18.07	18.33	19.25	19.50	21.10	17.10	17.37	18.28	18.53	20.14
	8H	18.38	18.61	19.56	19.77	21.41	17.40	17.63	18.58	18.80	20.43