

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855058

Luminaire Tested: SQ2-F-125U-125D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855058
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-13)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-F-125U-125D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11227.2 lumens
Efficiency: N/A
Efficacy: 120.6 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 93.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855058

CATALOG NUMBER: SQ2-F-125U-125D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

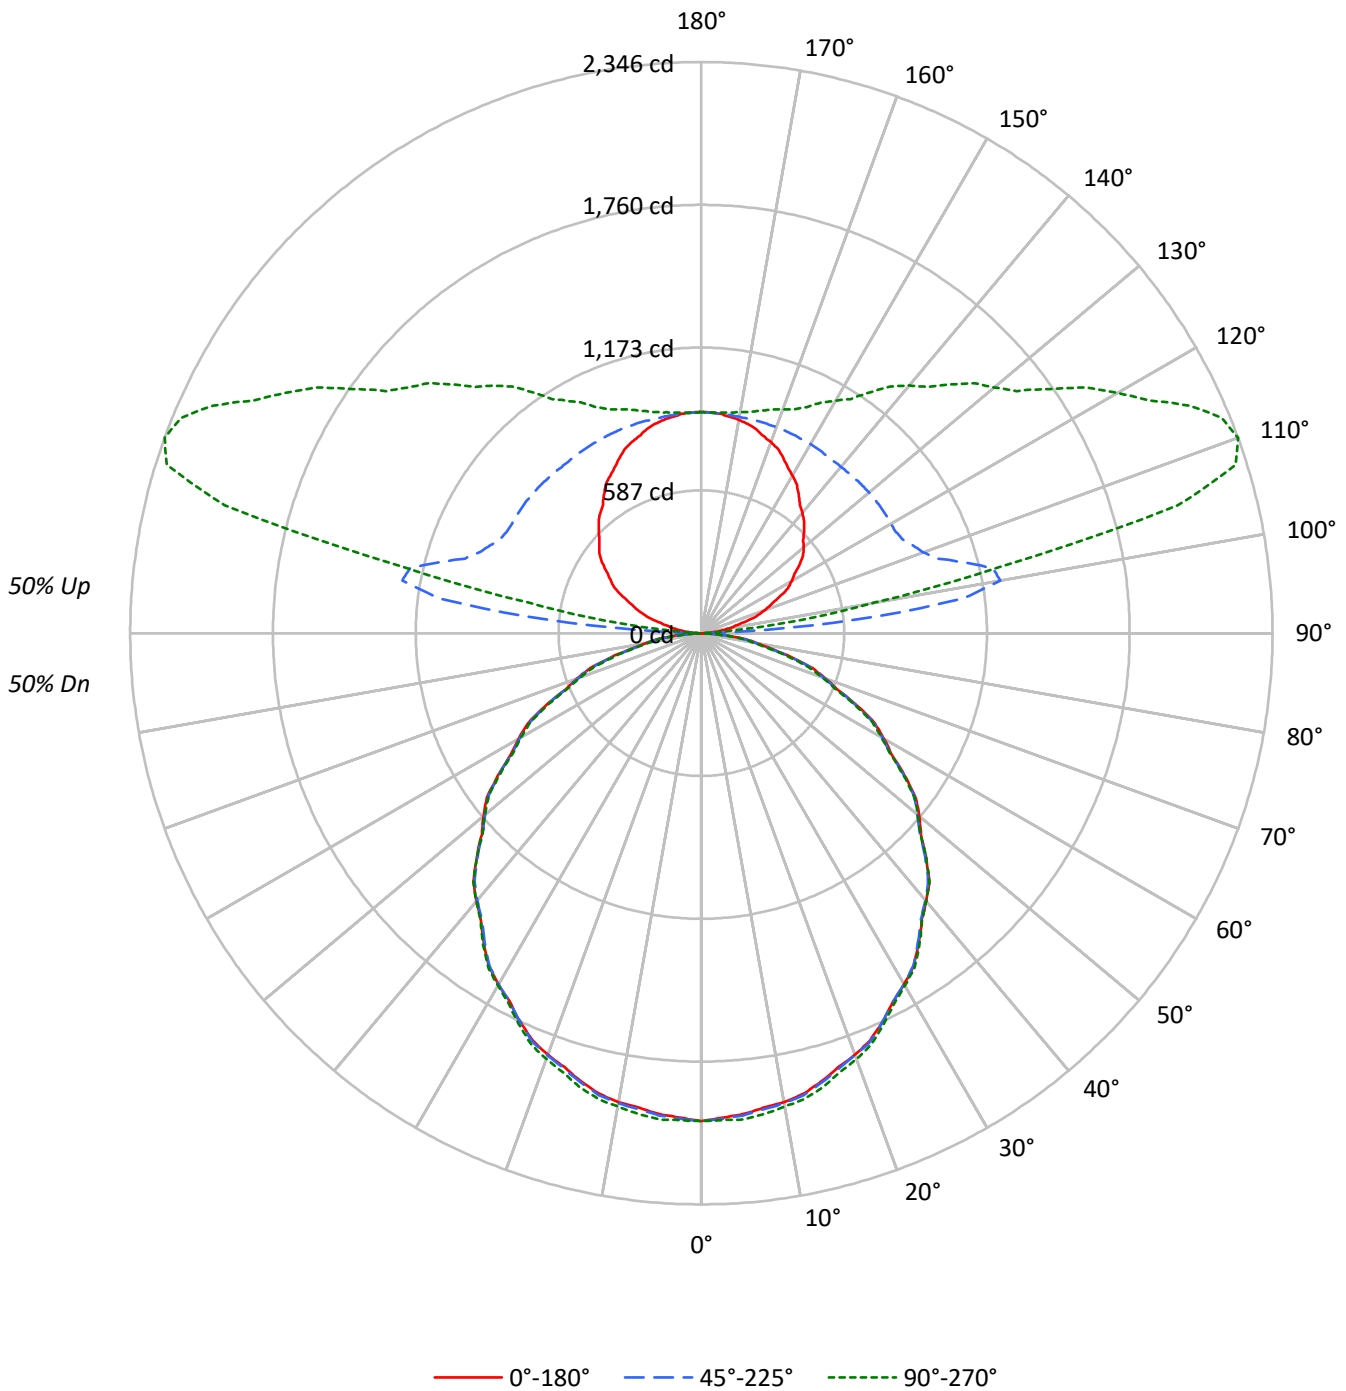



TEST NUMBER: P855058

CATALOG NUMBER: SQ2-F-125U-125D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	93	89	86	90	86	83	80	73	70	68	61	59	57	49	48	47	42
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	43	41	39	35
3	81	71	64	58	74	66	59	54	56	51	47	47	43	40	38	36	33	29
4	74	63	55	49	68	58	51	46	50	44	40	42	38	34	34	31	29	25
5	68	56	48	42	62	52	45	39	44	39	34	37	33	30	31	27	25	22
6	62	50	42	36	57	47	39	34	40	34	30	34	29	26	28	24	22	19
7	58	45	37	32	53	42	35	30	36	30	26	31	26	23	25	22	19	17
8	53	41	33	28	49	38	31	26	33	27	23	28	23	20	23	20	17	15
9	50	37	30	25	46	35	28	23	30	25	21	26	21	18	21	18	16	13
10	46	34	27	22	43	32	25	21	28	22	19	24	19	16	20	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	32359	32359	32359
5°	32130	32217	32483
10°	32054	32142	32367
15°	31858	31950	32269
20°	31668	31716	31998
25°	31376	31376	31572
30°	31055	31055	31155
35°	30677	30569	30786
40°	30273	30157	30273
45°	29803	29679	29803
50°	29353	29082	29150
55°	28670	28594	28439
60°	27952	27774	27600
65°	27121	26812	26495
70°	25525	25398	24878
75°	24017	23506	22826
80°	21330	20818	20056
85°	17191	15691	14653

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 29985 cd/sqm



TEST NUMBER: P855058

CATALOG NUMBER: SQ2-F-125U-125D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.5	1.7
10°-20°	541.3	4.8
20°-30°	814.4	7.3
30°-40°	974.5	8.7
40°-50°	1005.5	9.0
50°-60°	907.1	8.1
60°-70°	692.2	6.2
70°-80°	398.0	3.5
80°-90°	104.8	0.9
90°-100°	347.2	3.1
100°-110°	1130.4	10.1
110°-120°	1118.1	10.0
120°-130°	913.8	8.1
130°-140°	746.8	6.7
140°-150°	581.7	5.2
150°-160°	419.3	3.7
160°-170°	256.3	2.3
170°-180°	86.5	0.8
0°-30°	1545.2	13.8
0°-40°	2519.7	22.4
0°-60°	4432.3	39.5
0°-90°	5627.2	50.1
90°-120°	2595.7	23.1
90°-150°	4838.0	43.1
90°-180°	5600.0	49.9
0°-180°	11227.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2004	2004	2004	2004	2004	
5°	1982	2009	1988	1991	2004	188
15°	1906	1930	1911	1920	1930	538
25°	1761	1780	1761	1764	1772	811
35°	1556	1567	1551	1557	1562	973
45°	1305	1313	1300	1302	1305	1007
55°	1018	1024	1016	1010	1010	911
65°	710	707	702	696	694	698
75°	385	382	377	369	366	406
85°	93	88	85	76	79	107
90°	0	3	8	7	7	6
95°	47	143	636	227	140	55
105°	192	277	1120	2139	2025	205
115°	355	424	912	1880	2212	351
125°	493	550	900	1484	1749	439
135°	596	658	895	1281	1445	461
145°	697	748	893	1103	1208	436
155°	795	821	899	988	1025	366
165°	867	875	901	935	946	244
175°	904	904	904	911	909	86
180°	908	908	908	908	908	



TEST NUMBER: P855058

CATALOG NUMBER: SQ2-F-125U-125D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2004.2	2004.2	2004.2	2004.2	2004.2
2.5°	1991.1	2014.6	1995.5	1999.9	2002.0
5°	1982.4	2009.0	1987.8	1990.8	2004.2
7.5°	1966.0	1994.8	1971.5	1976.7	1991.6
10°	1955.1	1981.8	1960.5	1963.5	1974.2
12.5°	1937.6	1964.3	1943.0	1948.2	1958.8
15°	1905.9	1929.9	1911.4	1919.8	1930.5
17.5°	1869.3	1895.0	1874.3	1881.5	1890.7
20°	1843.1	1864.4	1845.9	1848.8	1862.3
22.5°	1810.4	1831.8	1815.2	1816.0	1827.2
25°	1761.2	1779.9	1761.2	1764.1	1772.2
27.5°	1704.9	1721.0	1704.9	1707.8	1714.7
30°	1665.7	1681.6	1665.7	1668.4	1671.1
32.5°	1621.9	1635.8	1619.8	1622.7	1629.6
35°	1556.4	1567.1	1550.9	1556.6	1561.9
37.5°	1486.5	1494.5	1481.0	1483.9	1488.7
40°	1436.3	1444.3	1430.8	1433.5	1436.3
42.5°	1386.1	1391.9	1378.4	1381.2	1386.1
45°	1305.2	1313.2	1299.8	1302.5	1305.2
47.5°	1223.2	1228.1	1216.7	1214.6	1219.5
50°	1168.6	1171.3	1157.8	1157.8	1160.5
52.5°	1109.7	1112.3	1103.2	1098.9	1101.5
55°	1018.5	1023.8	1015.8	1010.3	1010.3
57.5°	926.8	931.5	921.2	918.5	918.0
60°	865.6	868.2	860.1	857.4	854.7
62.5°	804.5	804.9	796.8	793.9	791.3
65°	709.9	707.2	701.8	696.2	693.5
67.5°	604.0	606.7	601.3	592.6	592.6
70°	540.7	543.3	538.0	527.0	527.0
72.5°	479.5	477.9	474.5	465.7	461.4
75°	385.0	382.4	376.8	368.6	365.9
77.5°	290.6	287.9	285.0	274.7	276.9
80°	229.4	226.7	223.9	215.7	215.7
82.5°	174.8	169.9	167.1	159.0	159.0
85°	92.8	87.5	84.7	76.5	79.1
87.5°	26.2	24.8	23.4	18.8	18.8
90°	0.0	3.3	7.8	6.7	6.7
92.5°	16.1	57.8	184.6	60.8	46.9
95°	46.9	142.9	636.3	226.9	139.5
97.5°	88.2	186.0	1080.0	657.8	401.5
100°	115.0	211.1	1247.0	1112.0	721.2
102.5°	145.4	237.9	1226.5	1645.1	1250.8
105°	192.0	277.1	1119.8	2138.7	2025.2
107.5°	242.5	322.6	1018.4	2181.5	2301.8
110°	279.2	352.2	970.2	2128.3	2345.6



TEST NUMBER: P855058

CATALOG NUMBER: SQ2-F-125U-125D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	309.5	381.7	939.8	2032.4	2312.5
115°	355.0	423.8	912.1	1879.8	2211.7
117.5°	401.9	463.9	901.3	1739.9	2070.3
120°	428.7	489.8	898.7	1654.0	1973.8
122.5°	454.6	514.9	899.7	1579.4	1877.3
125°	493.4	550.2	899.9	1484.2	1749.4
127.5°	526.8	584.8	899.7	1412.9	1634.0
130°	548.1	607.2	898.7	1372.0	1569.7
132.5°	566.9	628.5	897.8	1334.3	1519.7
135°	596.2	658.4	895.4	1280.9	1444.6
137.5°	624.8	687.4	892.9	1226.6	1372.0
140°	645.3	705.3	892.0	1189.9	1327.4
142.5°	664.9	722.4	892.0	1154.7	1277.4
145°	696.6	747.9	893.1	1103.2	1208.0
147.5°	727.5	772.0	894.7	1059.3	1140.3
150°	748.0	787.3	896.5	1033.1	1101.9
152.5°	768.5	800.8	897.4	1013.2	1068.0
155°	794.8	821.1	898.7	987.7	1024.8
157.5°	819.9	838.7	900.1	969.0	995.0
160°	835.1	850.4	900.9	957.2	978.0
162.5°	848.4	860.3	900.9	947.3	962.7
165°	867.4	875.1	900.9	934.7	945.6
167.5°	880.9	885.6	901.1	925.2	930.9
170°	889.8	892.0	902.0	918.9	921.0
172.5°	896.0	897.4	903.8	915.3	914.8
175°	904.3	904.3	904.3	911.0	908.8
177.5°	907.7	906.8	905.9	910.3	906.8
180°	907.7	907.7	907.7	907.7	907.7



TEST NUMBER: P855058

CATALOG NUMBER: SQ2-F-125U-125D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.06	20.93	21.01	21.90	23.17	19.98	20.85	20.93	21.83	23.09
	3H	21.84	22.62	22.81	23.60	24.90	21.72	22.51	22.69	23.49	24.78
	4H	22.50	23.24	23.48	24.23	25.53	22.35	23.09	23.33	24.07	25.37
	6H	22.97	23.65	23.96	24.64	25.96	22.79	23.47	23.77	24.46	25.77
	8H	23.11	23.76	24.10	24.77	26.08	22.91	23.56	23.90	24.56	25.87
	12H	23.18	23.80	24.18	24.80	26.14	22.96	23.58	23.96	24.58	25.91
4H	2H	20.61	21.35	21.60	22.34	23.64	20.55	21.29	21.53	22.28	23.58
	3H	22.60	23.22	23.59	24.23	25.55	22.49	23.11	23.49	24.13	25.44
	4H	23.39	23.96	24.39	24.96	26.30	23.25	23.82	24.25	24.82	26.16
	6H	23.98	24.47	25.00	25.50	26.83	23.80	24.29	24.82	25.32	26.65
	8H	24.17	24.63	25.18	25.65	27.00	23.97	24.42	24.98	25.45	26.80
	12H	24.27	24.68	25.31	25.72	27.08	24.04	24.46	25.08	25.50	26.85
8H	4H	23.64	24.10	24.65	25.12	26.47	23.51	23.97	24.53	24.99	26.34
	6H	24.36	24.74	25.40	25.80	27.15	24.19	24.57	25.23	25.63	26.98
	8H	24.62	24.96	25.67	26.01	27.37	24.43	24.76	25.48	25.81	27.18
	12H	24.79	25.09	25.85	26.13	27.54	24.57	24.86	25.62	25.90	27.31
12H	4H	23.63	24.05	24.67	25.08	26.44	23.51	23.93	24.55	24.96	26.32
	6H	24.40	24.73	25.45	25.78	27.15	24.24	24.58	25.29	25.62	26.99
	8H	24.69	24.99	25.75	26.03	27.44	24.51	24.80	25.56	25.85	27.25