

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854967

Luminaire Tested: SQ2-PH1-025U-050D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854967
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PH1-025U-050D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3772.3 lumens
Efficiency: N/A
Efficacy: 149.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 25.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854967

CATALOG NUMBER: SQ2-PH1-025U-050D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

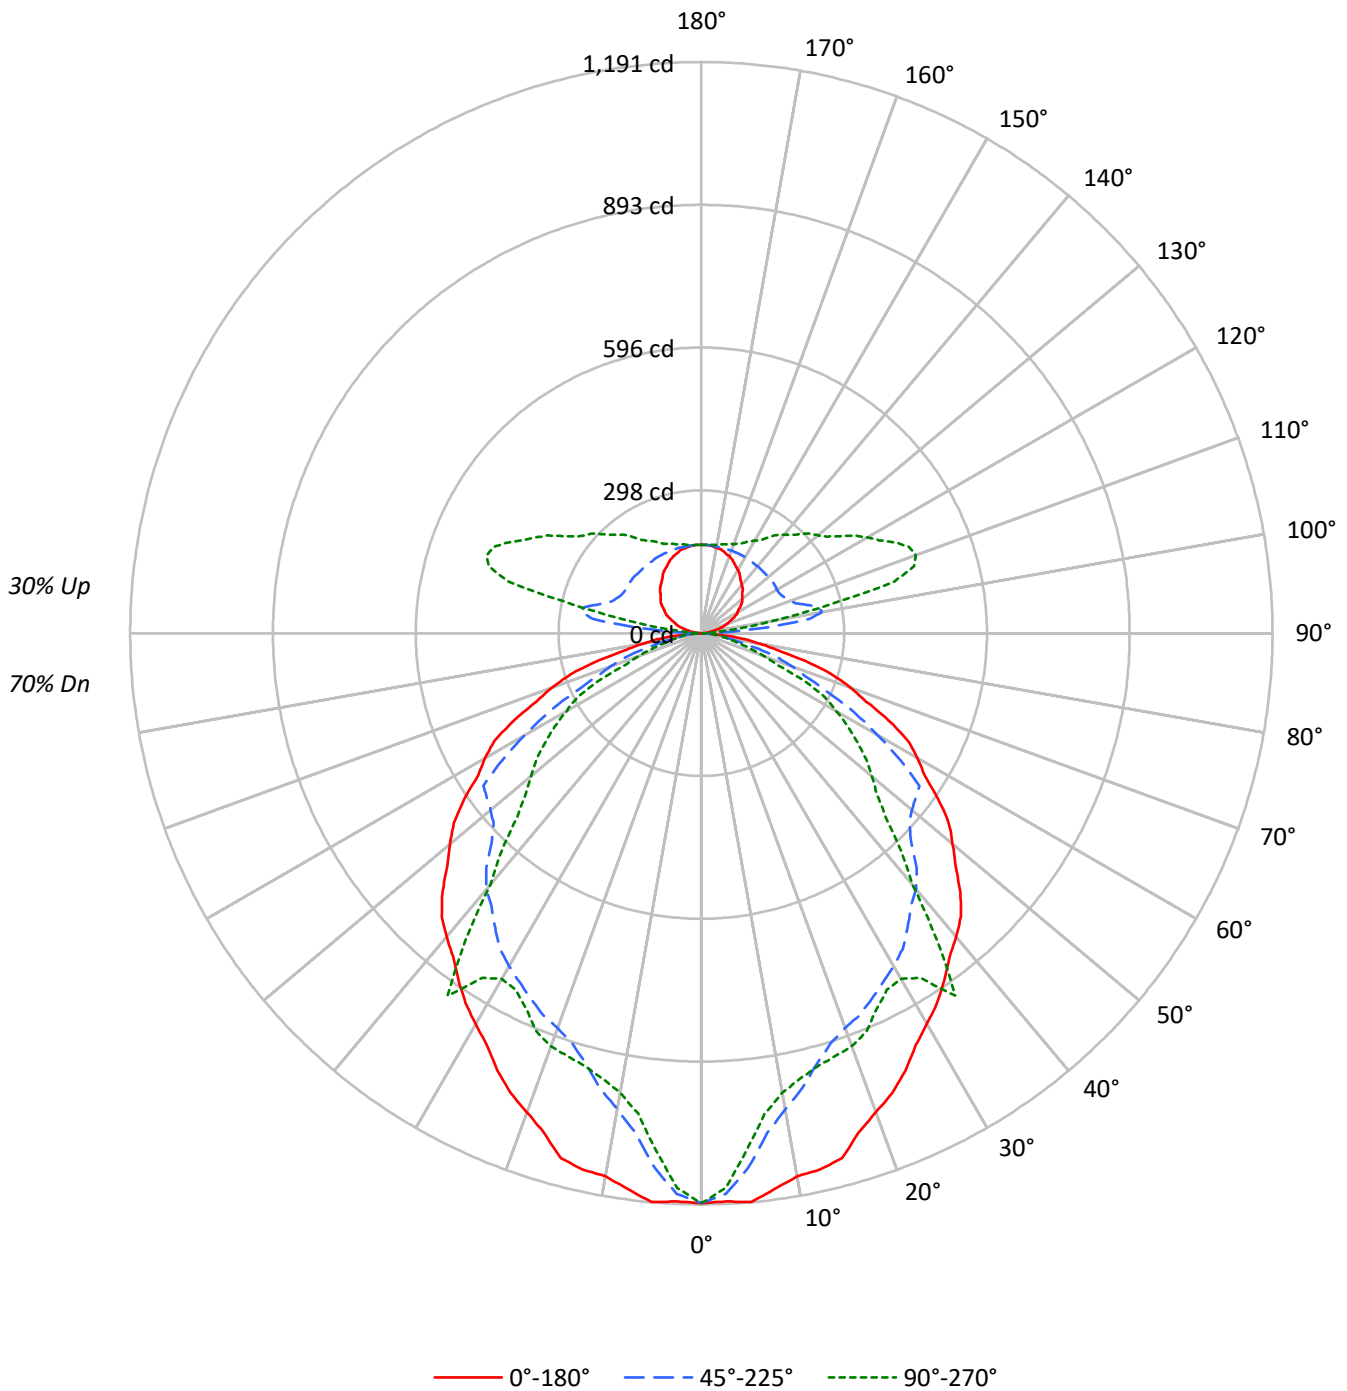



TEST NUMBER: P854967

CATALOG NUMBER: SQ2-PH1-025U-050D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	74	74	74	70	
1	103	98	94	91	97	93	90	87	83	81	78	74	72	71	66	65	63	63	63	63	59	
2	94	86	80	75	88	82	76	71	73	69	65	66	62	59	58	56	54	54	54	54	50	
3	85	76	68	62	81	72	65	60	65	59	55	58	54	50	52	49	46	46	46	46	43	
4	78	67	59	53	74	64	57	51	58	52	47	52	47	43	46	43	40	40	40	40	37	
5	72	60	52	46	68	57	50	44	52	46	41	47	42	38	42	38	35	35	35	35	32	
6	66	54	46	40	63	52	44	38	47	40	36	42	37	33	38	34	31	31	31	31	28	
7	62	49	41	35	58	47	39	34	42	36	32	39	33	29	35	30	27	27	27	27	25	
8	57	45	37	31	54	43	35	30	39	33	28	35	30	26	32	28	24	24	24	24	22	
9	53	41	33	28	50	39	32	27	36	30	25	33	27	24	30	25	22	22	22	22	20	
10	50	38	30	25	47	36	29	24	33	27	23	30	25	22	27	23	20	20	20	20	18	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19186	19186	19186
5°	19297	18141	17537
10°	18853	16516	15942
15°	18937	15535	15629
20°	18261	15055	15756
25°	17927	14986	15389
30°	17538	14945	15515
35°	17404	14775	18185
40°	17420	14680	14417
45°	17427	14123	12417
50°	17181	14398	11645
55°	16963	15626	11173
60°	16795	13692	10479
65°	16500	11102	9116
70°	15583	9446	6510
75°	13893	7124	4934
80°	11353	4621	4621
85°	7114	4187	3149

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17427 cd/sqm



TEST NUMBER: P854967

CATALOG NUMBER: SQ2-PH1-025U-050D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.6	2.8
10°-20°	275.0	7.3
20°-30°	403.3	10.7
30°-40°	488.4	12.9
40°-50°	480.3	12.7
50°-60°	418.1	11.1
60°-70°	290.7	7.7
70°-80°	137.8	3.7
80°-90°	30.8	0.8
90°-100°	74.5	2.0
100°-110°	231.9	6.1
110°-120°	226.9	6.0
120°-130°	185.2	4.9
130°-140°	151.5	4.0
140°-150°	118.3	3.1
150°-160°	85.3	2.3
160°-170°	52.2	1.4
170°-180°	17.6	0.5
0°-30°	782.9	20.8
0°-40°	1271.3	33.7
0°-60°	2169.6	57.5
0°-90°	2628.9	69.7
90°-120°	533.3	14.1
90°-150°	988.3	26.2
90°-180°	1143.0	30.3
0°-180°	3772.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1188	1188	1188	1188	1188	
5°	1191	1189	1119	1084	1082	112
15°	1133	1009	929	923	935	316
25°	1006	856	841	867	864	463
35°	883	714	750	814	923	553
45°	763	565	618	640	544	587
55°	603	440	555	400	397	538
65°	432	303	291	239	239	424
75°	223	154	114	81	79	236
85°	38	25	23	18	17	51
90°	0	1	3	3	3	2
95°	10	30	137	50	33	12
105°	41	57	228	436	416	43
115°	72	86	185	382	448	71
125°	101	112	183	301	353	89
135°	121	134	182	260	292	94
145°	141	152	182	224	244	89
155°	162	167	183	201	208	75
165°	177	178	184	190	192	50
175°	184	184	184	185	184	17
180°	184	184	184	184	184	



TEST NUMBER: P854967

CATALOG NUMBER: SQ2-PH1-025U-050D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1188.3	1188.3	1188.3	1188.3	1188.3
2.5°	1185.6	1198.0	1170.2	1159.4	1157.6
5°	1190.6	1189.4	1119.3	1084.3	1082.0
7.5°	1168.9	1134.6	1050.8	1012.2	1010.3
10°	1149.9	1098.0	1007.4	972.4	972.4
12.5°	1145.3	1063.4	972.1	946.2	951.5
15°	1132.9	1009.1	929.4	922.9	935.0
17.5°	1091.7	958.4	896.1	911.0	925.1
20°	1062.8	931.3	876.2	903.7	917.0
22.5°	1038.4	905.1	861.8	891.7	898.9
25°	1006.3	855.9	841.2	867.1	863.8
27.5°	967.8	810.9	820.6	836.4	838.5
30°	940.7	783.8	801.6	817.8	832.2
32.5°	914.5	752.2	780.8	819.2	852.1
35°	883.0	713.9	749.6	814.3	922.6
37.5°	850.0	668.7	718.2	772.6	807.1
40°	826.5	636.3	696.5	763.6	684.0
42.5°	801.2	611.0	663.9	750.6	616.2
45°	763.2	565.3	618.5	640.1	543.8
47.5°	718.4	529.8	587.7	533.7	496.1
50°	684.0	506.1	573.2	487.9	463.6
52.5°	650.6	481.4	563.3	450.1	433.7
55°	602.6	440.2	555.1	400.1	396.9
57.5°	551.8	398.1	490.9	356.7	362.5
60°	520.1	370.9	424.0	331.2	324.5
62.5°	486.6	344.5	361.6	298.6	291.9
65°	431.9	302.6	290.6	238.6	238.6
67.5°	371.8	259.0	235.4	195.3	168.7
70°	330.1	230.7	200.1	155.6	137.9
72.5°	285.8	200.5	163.9	127.5	107.2
75°	222.7	154.2	114.2	81.4	79.1
77.5°	161.0	111.0	76.9	60.4	60.6
80°	122.1	84.6	49.7	48.6	49.7
82.5°	85.9	58.1	37.1	38.7	38.9
85°	38.4	25.2	22.6	18.1	17.0
87.5°	8.1	7.5	5.2	5.2	5.2
90°	0.0	1.1	3.4	3.4	3.4
92.5°	3.6	12.7	43.2	14.1	11.5
95°	10.2	30.1	136.8	50.4	32.8
97.5°	18.5	39.1	226.5	141.0	88.9
100°	24.9	43.6	255.4	238.9	159.4
102.5°	31.2	49.1	250.0	341.2	267.8
105°	40.7	57.3	228.3	435.9	416.0
107.5°	50.2	65.7	207.5	443.1	465.0
110°	56.5	72.0	196.6	432.7	475.9



TEST NUMBER: P854967

CATALOG NUMBER: SQ2-PH1-025U-050D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	62.9	77.4	191.2	414.0	468.7
115°	72.4	85.6	185.3	382.4	447.6
117.5°	81.6	93.7	182.8	352.1	418.9
120°	87.1	99.2	181.9	334.9	399.0
122.5°	92.5	104.6	182.8	320.3	379.1
125°	100.6	111.6	183.1	300.8	352.6
127.5°	107.2	118.4	183.1	286.1	330.3
130°	110.8	122.9	183.1	277.8	317.6
132.5°	115.3	127.4	182.1	270.6	307.6
135°	121.0	134.2	181.9	259.6	291.6
137.5°	127.5	139.6	181.9	248.6	277.8
140°	131.2	143.3	181.9	241.4	267.8
142.5°	135.7	146.9	181.9	234.0	257.9
145°	141.3	152.3	181.9	224.2	244.1
147.5°	148.1	157.6	183.1	215.2	230.8
150°	152.6	160.3	183.1	210.5	222.6
152.5°	156.3	163.0	183.1	205.9	216.3
155°	161.7	167.1	183.1	201.4	207.9
157.5°	167.1	171.3	183.1	197.2	201.4
160°	170.7	174.0	183.1	194.5	197.7
162.5°	173.3	175.8	183.1	192.7	195.0
165°	177.4	178.5	184.2	189.9	192.1
167.5°	179.9	180.1	183.1	188.4	189.4
170°	180.8	181.9	183.1	186.6	187.6
172.5°	182.6	182.8	184.0	185.7	185.8
175°	184.2	184.2	184.2	185.3	184.2
177.5°	184.2	184.2	184.2	184.2	184.2
180°	184.2	184.2	184.2	184.2	184.2



TEST NUMBER: P854967

CATALOG NUMBER: SQ2-PH1-025U-050D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.24	20.30	20.01	21.09	22.05	17.92	18.97	18.68	19.77	20.72
	3H	21.28	22.23	22.07	23.03	24.02	18.96	19.91	19.75	20.71	21.70
	4H	22.02	22.92	22.82	23.73	24.73	19.19	20.08	19.99	20.89	21.89
	6H	22.52	23.34	23.33	24.16	25.18	19.34	20.17	20.15	20.98	22.00
	8H	22.65	23.43	23.47	24.27	25.29	19.38	20.16	20.20	21.00	22.02
	12H	22.70	23.45	23.53	24.28	25.32	19.38	20.13	20.21	20.96	22.00
4H	2H	19.64	20.54	20.45	21.35	22.35	18.58	19.48	19.39	20.28	21.29
	3H	21.77	22.51	22.58	23.35	24.37	19.78	20.52	20.60	21.37	22.38
	4H	22.59	23.27	23.42	24.11	25.15	20.06	20.74	20.89	21.58	22.63
	6H	23.19	23.77	24.03	24.64	25.69	20.28	20.87	21.13	21.73	22.78
	8H	23.36	23.91	24.21	24.77	25.83	20.34	20.89	21.19	21.75	22.81
	12H	23.44	23.93	24.31	24.81	25.88	20.36	20.85	21.23	21.73	22.80
8H	4H	22.62	23.17	23.47	24.03	25.09	20.29	20.84	21.14	21.70	22.76
	6H	23.28	23.73	24.16	24.64	25.70	20.57	21.02	21.45	21.93	22.99
	8H	23.51	23.91	24.40	24.81	25.89	20.68	21.08	21.57	21.98	23.06
	12H	23.63	23.98	24.52	24.87	26.01	20.73	21.08	21.62	21.97	23.11
12H	4H	22.58	23.07	23.45	23.96	25.02	20.30	20.79	21.17	21.67	22.74
	6H	23.26	23.66	24.15	24.56	25.64	20.61	21.01	21.50	21.90	22.98
	8H	23.50	23.85	24.39	24.74	25.87	20.73	21.08	21.62	21.97	23.10