

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854957

Luminaire Tested: SQ2-PH1-075U-100D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854957
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PH1-075U-100D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8448.7 lumens
Efficiency: N/A
Efficacy: 138.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 60.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854957

CATALOG NUMBER: SQ2-PH1-075U-100D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

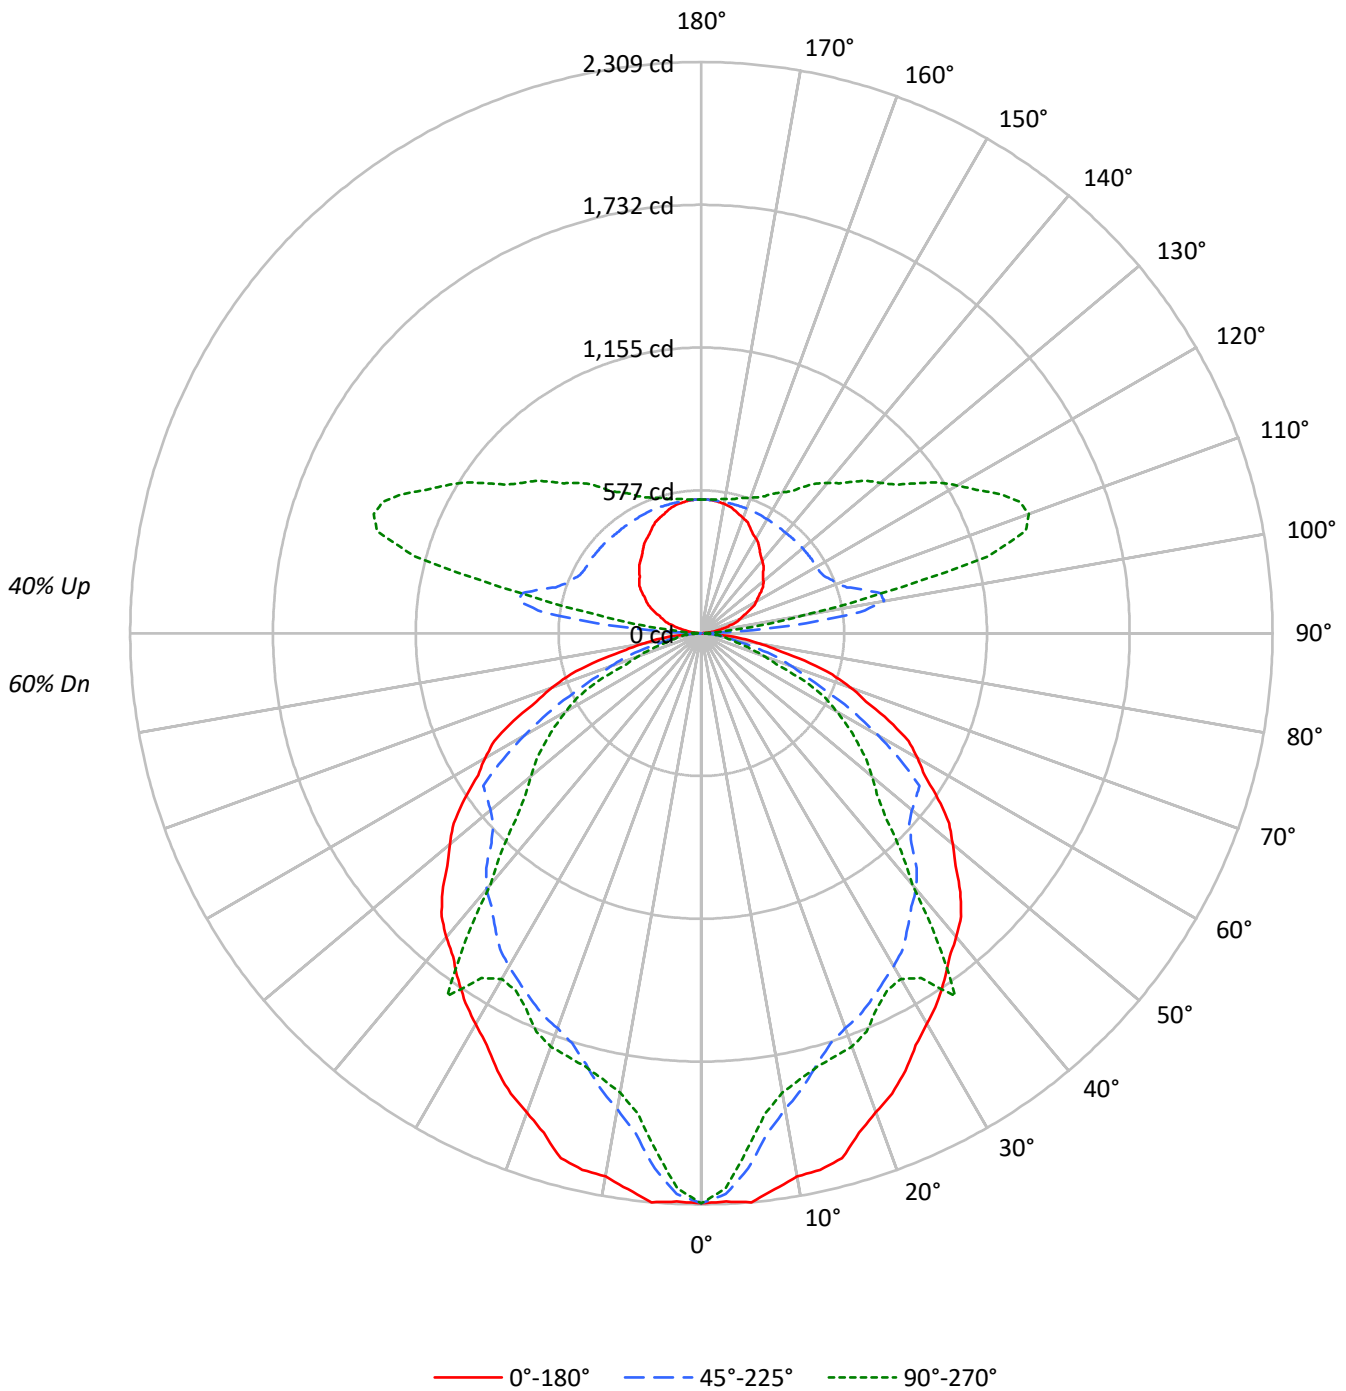



TEST NUMBER: P854957

CATALOG NUMBER: SQ2-PH1-075U-100D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	66	66	66	60
1	100	96	92	89	94	90	87	84	79	76	74	68	66	65	58	57	56	51
2	92	84	78	73	85	79	74	69	69	65	61	60	57	54	52	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	46	43	41	37
4	77	66	58	52	71	62	55	49	54	49	44	47	43	40	41	38	35	32
5	70	59	50	44	66	55	48	42	49	43	38	43	38	34	37	33	31	28
6	65	53	44	39	60	50	42	37	44	38	34	39	34	30	34	30	27	24
7	60	48	40	34	56	45	38	32	40	34	30	35	30	27	31	27	24	22
8	56	43	35	30	52	41	34	29	36	31	26	32	27	24	28	24	22	19
9	52	40	32	27	49	37	31	26	33	28	24	30	25	22	26	22	19	17
10	49	36	29	24	46	34	28	23	31	25	21	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	37213	37213	37213
5°	37426	35188	34015
10°	36564	32036	30919
15°	36729	30131	30315
20°	35419	29203	30558
25°	34769	29065	29847
30°	34015	28989	30091
35°	33758	28657	35272
40°	33786	28473	27963
45°	33798	27389	24085
50°	33325	27929	22584
55°	32904	30308	21667
60°	32576	26553	20324
65°	32004	21532	17677
70°	30232	18321	12628
75°	26949	13818	9576
80°	22027	8963	8963
85°	13801	8133	6095

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 33798 cd/sqm



TEST NUMBER: P854957

CATALOG NUMBER: SQ2-PH1-075U-100D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.8	2.4
10°-20°	533.4	6.3
20°-30°	782.2	9.3
30°-40°	947.2	11.2
40°-50°	931.5	11.0
50°-60°	810.9	9.6
60°-70°	563.7	6.7
70°-80°	267.3	3.2
80°-90°	59.4	0.7
90°-100°	204.6	2.4
100°-110°	678.4	8.0
110°-120°	673.3	8.0
120°-130°	548.4	6.5
130°-140°	445.7	5.3
140°-150°	346.1	4.1
150°-160°	249.4	3.0
160°-170°	152.7	1.8
170°-180°	51.6	0.6
0°-30°	1518.4	18.0
0°-40°	2465.7	29.2
0°-60°	4208.0	49.8
0°-90°	5098.5	60.3
90°-120°	1556.3	18.4
90°-150°	2896.5	34.3
90°-180°	3350.0	39.7
0°-180°	8448.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2305	2305	2305	2305	2305	
5°	2309	2307	2171	2103	2099	217
15°	2197	1957	1803	1790	1814	613
25°	1952	1660	1632	1682	1675	898
35°	1713	1385	1454	1579	1790	1073
45°	1480	1096	1200	1241	1055	1138
55°	1169	854	1077	776	770	1044
65°	838	587	564	463	463	823
75°	432	299	222	158	154	458
85°	74	49	44	35	33	100
90°	0	1	3	4	4	3
95°	29	86	371	132	88	33
105°	119	169	679	1281	1198	125
115°	212	253	547	1138	1331	209
125°	296	329	537	894	1054	263
135°	354	390	532	767	866	274
145°	411	442	531	660	723	258
155°	469	486	534	590	612	216
165°	515	521	537	558	564	145
175°	539	539	540	543	542	51
180°	541	541	541	541	541	

TEST NUMBER: P854957

CATALOG NUMBER: SQ2-PH1-075U-100D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2304.8	2304.8	2304.8	2304.8	2304.8
2.5°	2299.5	2323.6	2269.7	2248.6	2245.1
5°	2309.2	2307.1	2171.1	2103.0	2098.7
7.5°	2267.1	2200.6	2038.1	1963.0	1959.6
10°	2230.2	2129.5	1954.0	1885.9	1885.9
12.5°	2221.5	2062.4	1885.5	1835.3	1845.5
15°	2197.3	1957.1	1802.6	1790.0	1813.6
17.5°	2117.5	1858.9	1738.1	1766.9	1794.3
20°	2061.4	1806.2	1699.6	1752.7	1778.5
22.5°	2014.0	1755.4	1671.4	1729.7	1743.5
25°	1951.7	1660.1	1631.5	1681.8	1675.4
27.5°	1877.2	1572.7	1591.6	1622.5	1626.3
30°	1824.5	1520.0	1554.9	1586.2	1614.0
32.5°	1773.6	1458.9	1514.5	1588.7	1652.7
35°	1712.7	1384.6	1453.9	1579.3	1789.5
37.5°	1648.7	1297.0	1393.0	1498.4	1565.4
40°	1603.0	1234.2	1350.9	1481.1	1326.7
42.5°	1554.0	1185.1	1287.7	1455.9	1195.2
45°	1480.2	1096.4	1199.5	1241.3	1054.8
47.5°	1393.4	1027.6	1139.9	1035.2	962.3
50°	1326.7	981.5	1111.9	946.2	899.1
52.5°	1261.8	933.8	1092.5	873.0	841.2
55°	1168.9	853.6	1076.7	776.2	769.7
57.5°	1070.2	772.1	952.2	692.0	703.0
60°	1008.8	719.3	822.3	642.2	629.4
62.5°	943.9	668.1	701.3	579.1	566.2
65°	837.7	586.8	563.6	462.7	462.7
67.5°	721.0	502.3	456.6	378.7	327.2
70°	640.4	447.4	388.1	301.9	267.5
72.5°	554.4	388.8	317.9	247.4	207.9
75°	432.0	299.1	221.5	157.8	153.5
77.5°	312.3	215.4	149.1	117.1	117.6
80°	236.9	163.9	96.4	94.3	96.4
82.5°	166.7	112.6	71.9	75.0	75.4
85°	74.5	48.8	43.9	35.0	32.9
87.5°	15.8	14.2	9.5	9.7	9.7
90°	0.0	1.1	3.4	4.5	4.5
92.5°	8.9	34.6	102.0	33.0	27.8
95°	29.2	86.0	370.9	132.3	88.5
97.5°	53.6	113.2	647.3	377.5	238.6
100°	70.6	127.5	749.5	643.7	426.8
102.5°	89.4	144.6	743.2	983.8	743.2
105°	118.7	169.1	678.8	1280.8	1197.6
107.5°	148.8	193.7	617.3	1311.1	1374.4
110°	165.8	210.8	585.9	1281.1	1409.3



TEST NUMBER: P854957

CATALOG NUMBER: SQ2-PH1-075U-100D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	183.7	227.7	567.1	1228.2	1391.4
115°	211.8	253.4	546.7	1138.1	1330.9
117.5°	239.5	276.6	539.3	1052.1	1254.2
120°	256.5	292.7	536.6	998.1	1194.2
122.5°	271.8	307.1	536.6	953.9	1135.1
125°	295.8	328.6	536.6	894.2	1054.2
127.5°	315.4	347.7	535.2	849.1	985.8
130°	327.1	361.1	534.3	822.9	945.6
132.5°	337.8	372.7	533.4	801.1	911.4
135°	354.0	390.2	532.1	767.4	866.0
137.5°	371.5	406.4	530.8	734.9	821.9
140°	383.2	417.1	529.9	713.2	793.1
142.5°	393.9	426.9	530.8	691.5	762.7
145°	411.1	441.9	531.1	660.2	722.6
147.5°	429.8	455.4	531.3	633.6	680.0
150°	441.4	464.4	532.1	618.1	657.6
152.5°	452.1	474.3	533.0	605.5	637.0
155°	469.4	485.8	534.3	589.7	611.7
157.5°	486.2	499.0	535.7	578.7	594.2
160°	495.1	506.1	536.6	570.5	582.5
162.5°	504.2	512.4	536.6	565.1	574.5
165°	515.3	520.8	536.6	558.0	563.5
167.5°	525.6	528.5	537.7	551.6	554.6
170°	531.1	532.1	537.7	548.9	550.1
172.5°	534.6	535.7	538.6	546.2	546.4
175°	538.9	538.9	540.0	543.3	542.3
177.5°	541.1	541.1	540.2	541.9	540.2
180°	541.1	541.1	541.1	541.1	541.1



TEST NUMBER: P854957

CATALOG NUMBER: SQ2-PH1-075U-100D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.80	21.75	21.66	22.64	23.75	19.47	20.43	20.34	21.31	22.43
	3H	22.83	23.69	23.71	24.58	25.72	20.51	21.37	21.39	22.26	23.40
	4H	23.57	24.37	24.46	25.27	26.43	20.73	21.54	21.62	22.44	23.59
	6H	24.06	24.80	24.96	25.71	26.87	20.88	21.62	21.79	22.53	23.70
	8H	24.18	24.89	25.10	25.82	26.98	20.92	21.62	21.83	22.55	23.71
	12H	24.23	24.91	25.15	25.82	27.01	20.92	21.59	21.83	22.51	23.70
4H	2H	21.19	21.99	22.08	22.89	24.05	20.13	20.93	21.02	21.83	22.98
	3H	23.30	23.97	24.21	24.90	26.07	21.31	21.98	22.22	22.92	24.08
	4H	24.12	24.73	25.04	25.66	26.85	21.59	22.20	22.51	23.13	24.32
	6H	24.71	25.24	25.65	26.19	27.38	21.81	22.33	22.74	23.28	24.48
	8H	24.88	25.37	25.82	26.32	27.53	21.86	22.36	22.80	23.30	24.51
	12H	24.95	25.40	25.91	26.36	27.57	21.88	22.32	22.83	23.28	24.49
8H	4H	24.15	24.64	25.08	25.58	26.79	21.82	22.31	22.75	23.25	24.46
	6H	24.80	25.21	25.76	26.19	27.40	22.09	22.50	23.06	23.48	24.69
	8H	25.03	25.38	26.00	26.36	27.59	22.20	22.55	23.17	23.53	24.76
	12H	25.14	25.46	26.12	26.43	27.70	22.24	22.56	23.22	23.53	24.80
12H	4H	24.10	24.54	25.06	25.51	26.72	21.82	22.26	22.77	23.22	24.44
	6H	24.77	25.13	25.75	26.11	27.34	22.12	22.48	23.10	23.46	24.68
	8H	25.01	25.33	25.99	26.30	27.57	22.24	22.56	23.22	23.53	24.80