

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854945

Luminaire Tested: SQ2-PH1-125U-100D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854945
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PH1-125U-100D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10718.4 lumens
Efficiency: N/A
Efficacy: 131.5 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 81.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854945

CATALOG NUMBER: SQ2-PH1-125U-100D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

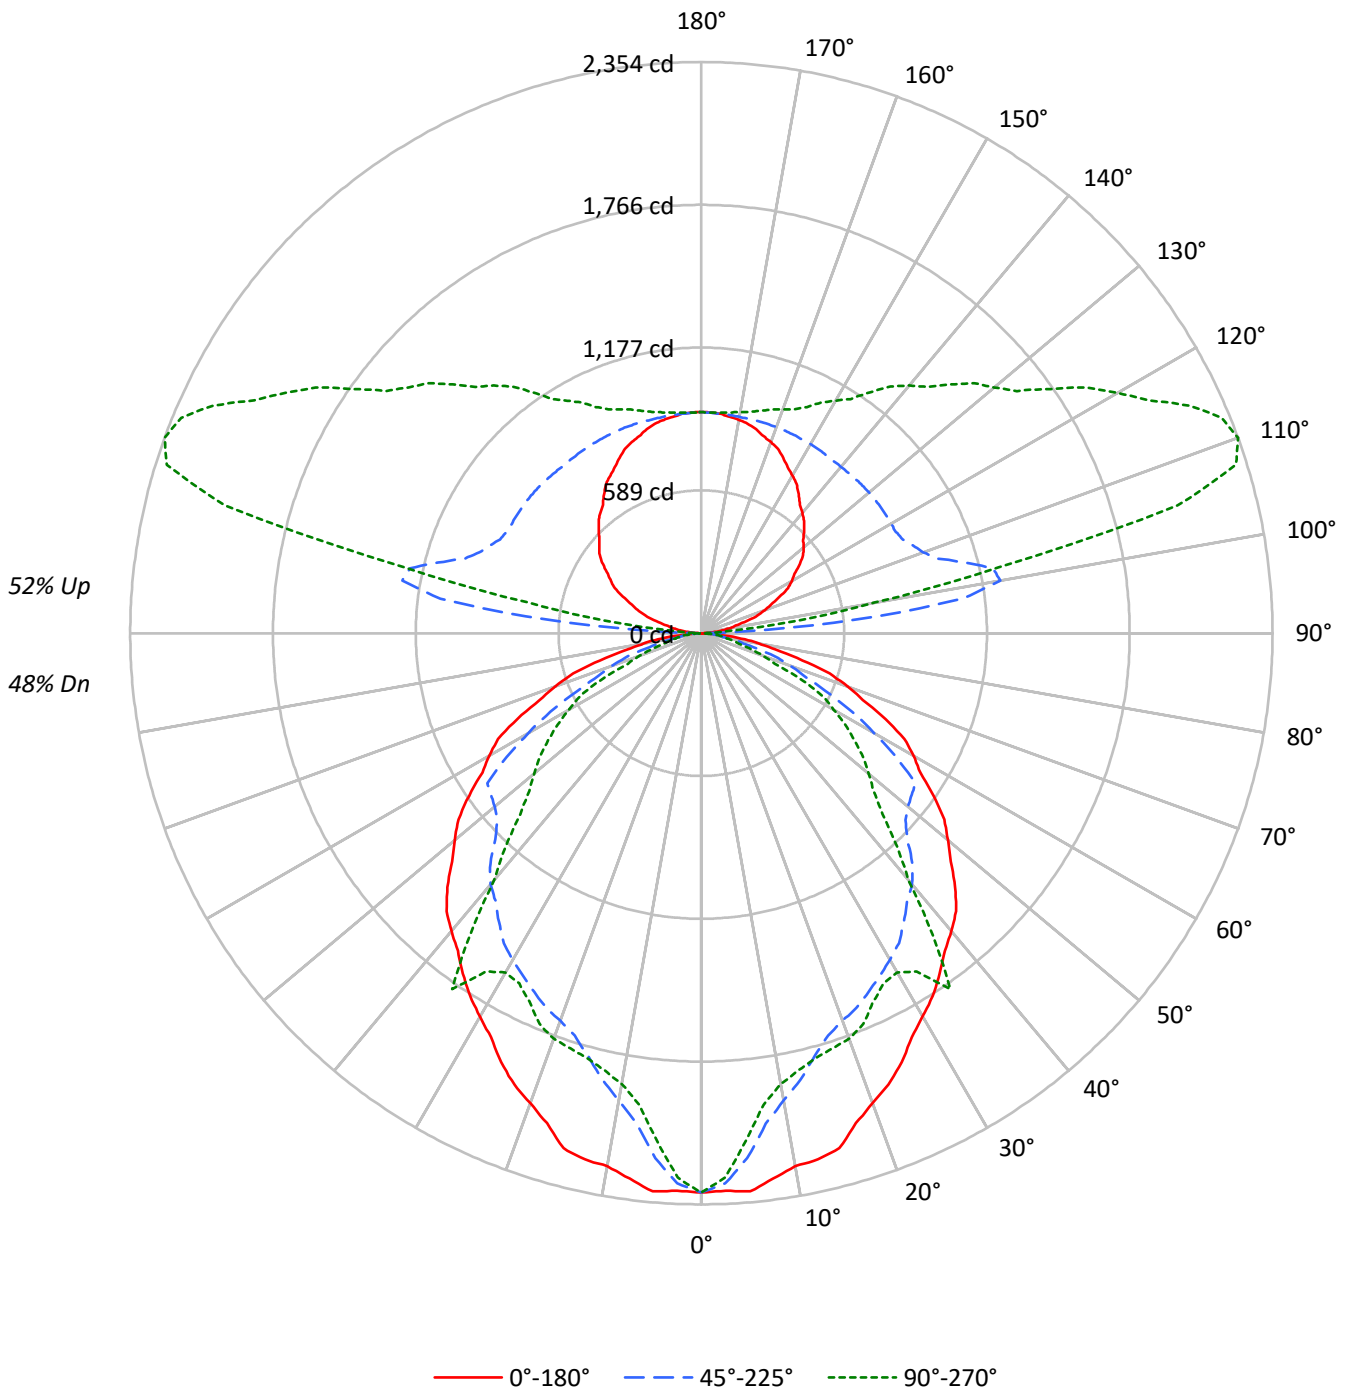



TEST NUMBER: P854945

CATALOG NUMBER: SQ2-PH1-125U-100D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	48		48
1	97	93	89	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41		41
2	89	82	76	71	81	75	70	66	63	60	56	52	50	47	42	41	39	34		34
3	81	72	65	59	74	66	60	55	56	51	47	46	43	40	38	35	33	29		29
4	74	64	56	50	68	59	52	47	50	45	40	41	38	35	34	31	29	25		25
5	68	57	49	43	62	52	45	40	45	39	35	37	33	30	30	27	25	22		22
6	63	51	43	37	58	47	40	35	40	35	30	34	29	26	28	24	22	19		19
7	58	46	38	32	53	43	36	31	36	31	27	31	26	23	25	22	20	17		17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	18	15		15
9	50	38	31	26	46	35	29	24	30	25	21	26	22	19	21	18	16	14		14
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	20	17	14	12		12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	37213	37213	37213
5°	37426	35188	34015
10°	36564	32036	30919
15°	36729	30131	30315
20°	35419	29203	30558
25°	34769	29065	29847
30°	34015	28989	30091
35°	33758	28657	35272
40°	33786	28473	27963
45°	33798	27389	24085
50°	33325	27929	22584
55°	32904	30308	21667
60°	32576	26553	20324
65°	32004	21532	17677
70°	30232	18321	12628
75°	26949	13818	9576
80°	22027	8963	8963
85°	13801	8133	6095

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 33798 cd/sqm



TEST NUMBER: P854945

CATALOG NUMBER: SQ2-PH1-125U-100D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.8	1.9
10°-20°	533.4	5.0
20°-30°	782.2	7.3
30°-40°	947.2	8.8
40°-50°	931.5	8.7
50°-60°	810.9	7.6
60°-70°	563.7	5.3
70°-80°	267.3	2.5
80°-90°	59.9	0.6
90°-100°	348.4	3.3
100°-110°	1134.3	10.6
110°-120°	1122.0	10.5
120°-130°	916.9	8.6
130°-140°	749.4	7.0
140°-150°	583.7	5.4
150°-160°	420.8	3.9
160°-170°	257.2	2.4
170°-180°	86.8	0.8
0°-30°	1518.4	14.2
0°-40°	2465.7	23.0
0°-60°	4208.0	39.3
0°-90°	5099.0	47.6
90°-120°	2604.7	24.3
90°-150°	4854.8	45.3
90°-180°	5619.0	52.4
0°-180°	10718.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2305	2305	2305	2305	2305	
5°	2309	2307	2171	2103	2099	217
15°	2197	1957	1803	1790	1814	613
25°	1952	1660	1632	1682	1675	898
35°	1713	1385	1454	1579	1790	1073
45°	1480	1096	1200	1241	1055	1138
55°	1169	854	1077	776	770	1044
65°	838	587	564	463	463	823
75°	432	299	222	158	154	458
85°	74	49	44	35	33	100
90°	0	3	8	7	7	4
95°	47	144	639	228	140	55
105°	193	278	1124	2146	2032	206
115°	356	425	915	1886	2219	353
125°	495	552	903	1489	1756	441
135°	598	661	898	1285	1450	462
145°	699	750	896	1107	1212	438
155°	798	824	902	991	1028	367
165°	870	878	904	938	949	245
175°	908	908	908	914	912	86
180°	911	911	911	911	911	



TEST NUMBER: P854945

CATALOG NUMBER: SQ2-PH1-125U-100D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2304.8	2304.8	2304.8	2304.8	2304.8
2.5°	2299.5	2323.6	2269.7	2248.6	2245.1
5°	2309.2	2307.1	2171.1	2103.0	2098.7
7.5°	2267.1	2200.6	2038.1	1963.0	1959.6
10°	2230.2	2129.5	1954.0	1885.9	1885.9
12.5°	2221.5	2062.4	1885.5	1835.3	1845.5
15°	2197.3	1957.1	1802.6	1790.0	1813.6
17.5°	2117.5	1858.9	1738.1	1766.9	1794.3
20°	2061.4	1806.2	1699.6	1752.7	1778.5
22.5°	2014.0	1755.4	1671.4	1729.7	1743.5
25°	1951.7	1660.1	1631.5	1681.8	1675.4
27.5°	1877.2	1572.7	1591.6	1622.5	1626.3
30°	1824.5	1520.0	1554.9	1586.2	1614.0
32.5°	1773.6	1458.9	1514.5	1588.7	1652.7
35°	1712.7	1384.6	1453.9	1579.3	1789.5
37.5°	1648.7	1297.0	1393.0	1498.4	1565.4
40°	1603.0	1234.2	1350.9	1481.1	1326.7
42.5°	1554.0	1185.1	1287.7	1455.9	1195.2
45°	1480.2	1096.4	1199.5	1241.3	1054.8
47.5°	1393.4	1027.6	1139.9	1035.2	962.3
50°	1326.7	981.5	1111.9	946.2	899.1
52.5°	1261.8	933.8	1092.5	873.0	841.2
55°	1168.9	853.6	1076.7	776.2	769.7
57.5°	1070.2	772.1	952.2	692.0	703.0
60°	1008.8	719.3	822.3	642.2	629.4
62.5°	943.9	668.1	701.3	579.1	566.2
65°	837.7	586.8	563.6	462.7	462.7
67.5°	721.0	502.3	456.6	378.7	327.2
70°	640.4	447.4	388.1	301.9	267.5
72.5°	554.4	388.8	317.9	247.4	207.9
75°	432.0	299.1	221.5	157.8	153.5
77.5°	312.3	215.4	149.1	117.1	117.6
80°	236.9	163.9	96.4	94.3	96.4
82.5°	166.7	112.6	71.9	75.0	75.4
85°	74.5	48.8	43.9	35.0	32.9
87.5°	15.8	14.7	10.3	10.1	10.1
90°	0.0	3.3	7.8	6.7	6.7
92.5°	16.2	58.0	185.3	61.1	47.0
95°	47.0	143.5	638.6	227.7	140.1
97.5°	88.5	186.7	1083.7	660.1	402.8
100°	115.4	211.8	1251.4	1115.8	723.7
102.5°	145.9	238.8	1230.7	1650.9	1255.1
105°	192.7	278.1	1123.6	2146.2	2032.2
107.5°	243.3	323.7	1022.0	2189.2	2309.8
110°	280.1	353.4	973.5	2135.8	2353.8



TEST NUMBER: P854945

CATALOG NUMBER: SQ2-PH1-125U-100D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	310.6	383.1	943.1	2039.5	2320.5
115°	356.3	425.2	915.3	1886.3	2219.3
117.5°	403.3	465.5	904.5	1746.1	2077.4
120°	430.2	491.5	901.8	1659.8	1980.7
122.5°	456.2	516.7	902.7	1584.8	1883.9
125°	495.2	552.1	902.9	1489.3	1755.5
127.5°	528.6	586.8	902.7	1417.7	1639.7
130°	550.1	609.2	901.8	1376.9	1575.1
132.5°	568.9	630.7	900.9	1338.9	1524.9
135°	598.2	660.6	898.5	1285.3	1449.7
137.5°	626.9	689.8	896.0	1230.9	1376.9
140°	647.5	707.8	895.1	1194.0	1332.0
142.5°	667.2	724.9	895.1	1158.7	1281.8
145°	699.1	750.5	896.3	1107.0	1212.2
147.5°	729.9	774.7	897.8	1063.0	1144.3
150°	750.6	790.0	899.7	1036.7	1105.8
152.5°	771.2	803.7	900.4	1016.7	1071.6
155°	797.7	823.9	901.8	991.2	1028.4
157.5°	822.8	841.5	903.2	972.4	998.4
160°	838.0	853.3	904.1	960.6	981.4
162.5°	851.4	863.2	904.1	950.5	966.1
165°	870.5	878.2	904.1	938.0	948.8
167.5°	883.9	888.7	904.3	928.4	934.1
170°	892.9	895.0	905.2	922.0	924.2
172.5°	899.2	900.4	907.0	918.4	918.0
175°	907.5	907.5	907.5	914.1	911.9
177.5°	910.8	909.9	909.0	913.4	909.9
180°	910.8	910.8	910.8	910.8	910.8



TEST NUMBER: P854945

CATALOG NUMBER: SQ2-PH1-125U-100D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.66	20.50	20.64	21.49	22.79	18.34	19.17	19.32	20.16	21.47
	3H	21.69	22.43	22.68	23.43	24.76	19.37	20.11	20.36	21.11	22.44
	4H	22.42	23.12	23.42	24.13	25.46	19.58	20.29	20.59	21.29	22.63
	6H	22.90	23.55	23.92	24.56	25.91	19.72	20.37	20.74	21.38	22.73
	8H	23.02	23.64	24.04	24.67	26.01	19.76	20.37	20.78	21.40	22.74
	12H	23.07	23.66	24.09	24.67	26.04	19.75	20.34	20.78	21.36	22.73
4H	2H	20.04	20.74	21.05	21.75	23.08	18.98	19.68	19.99	20.68	22.02
	3H	22.14	22.73	23.16	23.76	25.11	20.15	20.74	21.17	21.77	23.12
	4H	22.95	23.49	23.98	24.52	25.89	20.43	20.96	21.45	21.99	23.36
	6H	23.54	24.00	24.57	25.05	26.42	20.63	21.09	21.67	22.14	23.51
	8H	23.71	24.14	24.74	25.18	26.56	20.69	21.12	21.73	22.16	23.54
	12H	23.77	24.16	24.83	25.22	26.61	20.69	21.08	21.75	22.14	23.53
8H	4H	22.97	23.40	24.01	24.44	25.82	20.64	21.07	21.68	22.11	23.50
	6H	23.62	23.97	24.68	25.06	26.44	20.91	21.27	21.97	22.35	23.73
	8H	23.84	24.16	24.91	25.22	26.62	21.01	21.32	22.08	22.39	23.79
	12H	23.96	24.23	25.03	25.29	26.74	21.06	21.33	22.13	22.39	23.83
12H	4H	22.92	23.31	23.98	24.36	25.75	20.64	21.02	21.69	22.08	23.47
	6H	23.59	23.91	24.66	24.97	26.37	20.94	21.25	22.01	22.32	23.72
	8H	23.82	24.10	24.90	25.16	26.60	21.05	21.33	22.13	22.39	23.83