

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854944

Luminaire Tested: SQ2-PH1-125U-125D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854944
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PH1-125U-125D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11948.8 lumens
Efficiency: N/A
Efficacy: 128.3 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 93.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854944

CATALOG NUMBER: SQ2-PH1-125U-125D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

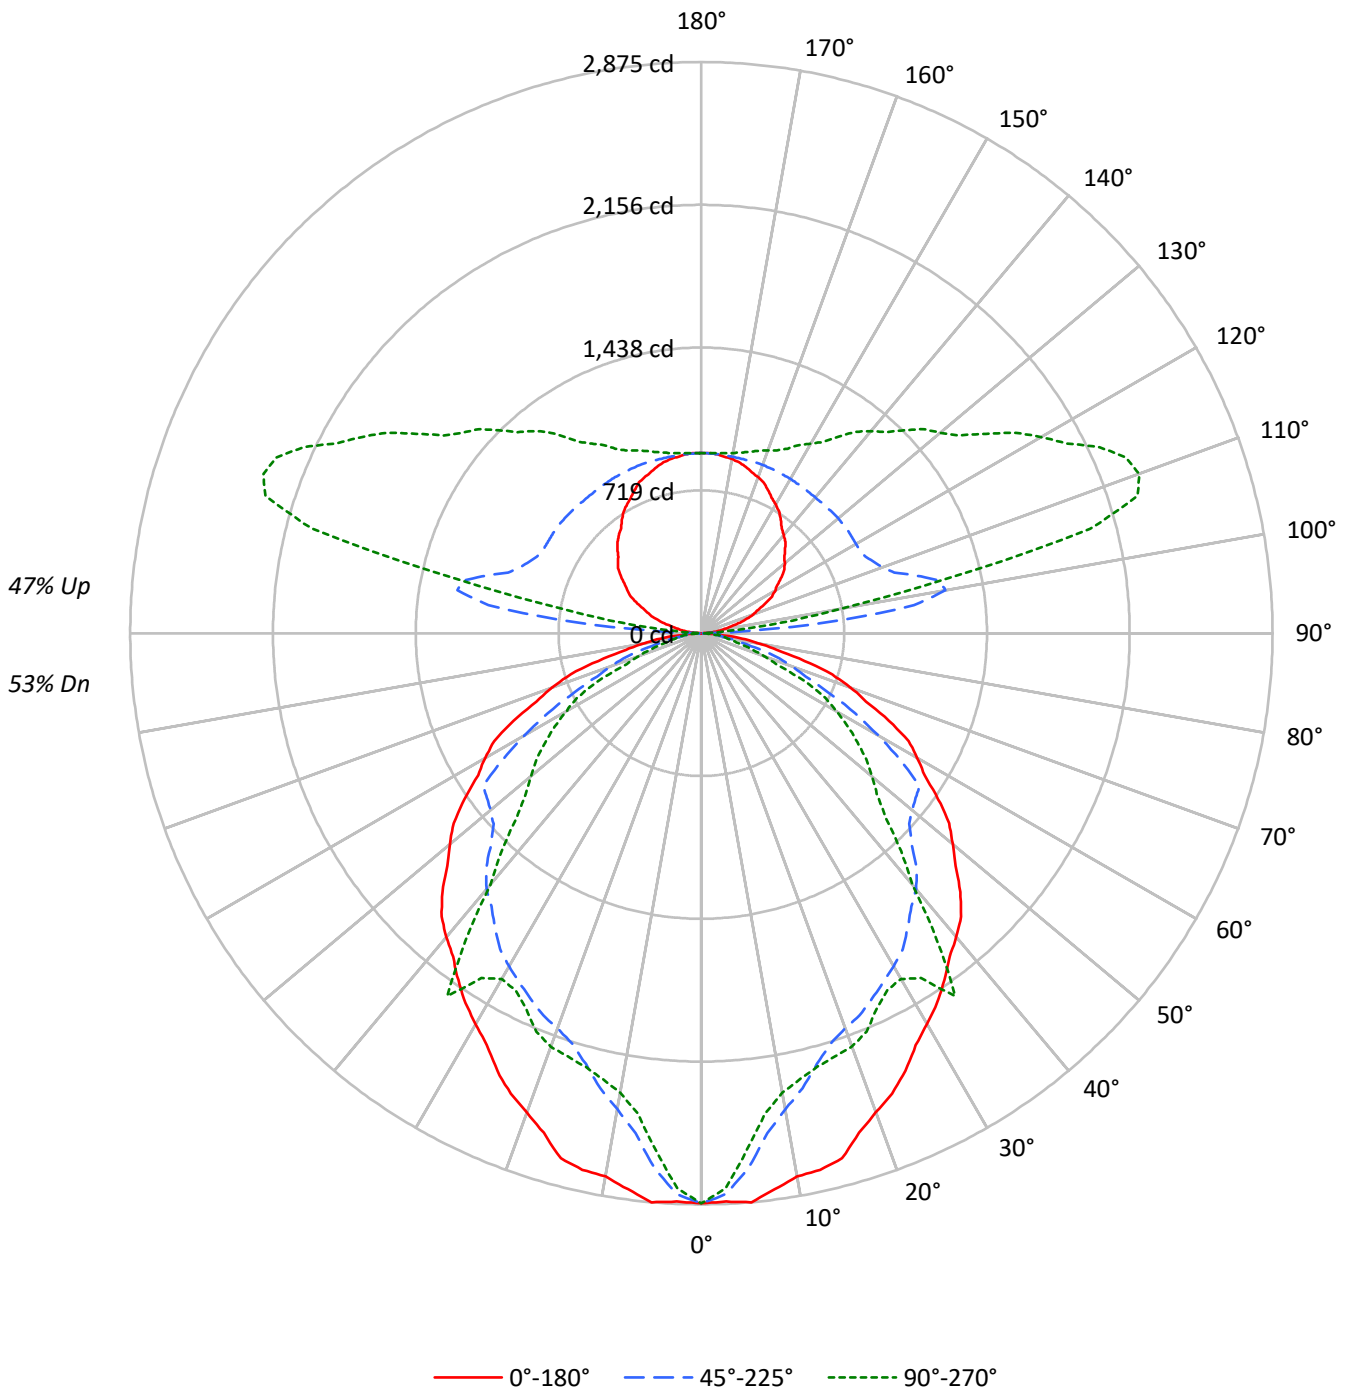



TEST NUMBER: P854944

CATALOG NUMBER: SQ2-PH1-125U-125D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	94	91	87	91	88	84	81	75	73	70	63	62	60	53	51	50	45
2	90	83	77	72	83	77	72	67	66	62	59	56	53	50	46	44	43	38
3	82	73	66	60	76	68	61	56	58	53	49	49	46	43	41	39	36	32
4	75	64	57	51	69	60	53	48	52	46	42	44	40	37	37	34	31	28
5	69	57	49	43	64	54	46	41	46	41	36	40	35	32	33	30	27	24
6	64	52	44	38	59	48	41	36	42	36	32	36	31	28	30	27	24	21
7	59	47	39	33	54	44	36	31	38	32	28	33	28	25	28	24	22	19
8	55	42	35	29	51	40	33	28	35	29	25	30	25	22	25	22	19	17
9	51	39	31	26	47	36	30	25	32	26	22	27	23	20	23	20	17	15
10	48	36	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	46335	46335	46335
5°	46601	43814	42352
10°	45529	39887	38499
15°	45733	37519	37747
20°	44103	36361	38050
25°	43294	36191	37164
30°	42355	36094	37468
35°	42034	35684	43919
40°	42069	35453	34819
45°	42087	34104	29990
50°	41496	34774	28123
55°	40969	37740	26978
60°	40558	33063	25304
65°	39851	26812	22013
70°	37638	22815	15725
75°	33562	17205	11928
80°	27420	11176	11176
85°	17191	10115	7577

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 42087 cd/sqm



TEST NUMBER: P854944

CATALOG NUMBER: SQ2-PH1-125U-125D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	252.5	2.1
10°-20°	664.2	5.6
20°-30°	973.9	8.2
30°-40°	1179.5	9.9
40°-50°	1159.9	9.7
50°-60°	1009.7	8.4
60°-70°	701.9	5.9
70°-80°	332.8	2.8
80°-90°	74.3	0.6
90°-100°	347.2	2.9
100°-110°	1130.4	9.5
110°-120°	1118.1	9.4
120°-130°	913.8	7.6
130°-140°	746.8	6.3
140°-150°	581.7	4.9
150°-160°	419.3	3.5
160°-170°	256.3	2.1
170°-180°	86.5	0.7
0°-30°	1890.7	15.8
0°-40°	3070.1	25.7
0°-60°	5239.7	43.9
0°-90°	6348.8	53.1
90°-120°	2595.7	21.7
90°-150°	4838.0	40.5
90°-180°	5600.0	46.9
0°-180°	11948.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2870	2870	2870	2870	2870	
5°	2875	2873	2703	2618	2613	270
15°	2736	2437	2245	2229	2258	763
25°	2430	2067	2032	2094	2086	1118
35°	2133	1724	1810	1966	2228	1336
45°	1843	1365	1494	1546	1313	1417
55°	1455	1063	1341	966	958	1300
65°	1043	731	702	576	576	1025
75°	538	372	276	196	191	570
85°	93	61	55	44	41	124
90°	0	3	8	7	7	5
95°	47	143	636	227	140	55
105°	192	277	1120	2139	2025	205
115°	355	424	912	1880	2212	351
125°	493	550	900	1484	1749	439
135°	596	658	895	1281	1445	461
145°	697	748	893	1103	1208	436
155°	795	821	899	988	1025	366
165°	867	875	901	935	946	244
175°	904	904	904	911	909	86
180°	908	908	908	908	908	



TEST NUMBER: P854944

CATALOG NUMBER: SQ2-PH1-125U-125D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2869.8	2869.8	2869.8	2869.8	2869.8
2.5°	2863.2	2893.2	2826.2	2799.8	2795.5
5°	2875.3	2872.6	2703.3	2618.5	2613.1
7.5°	2822.9	2740.1	2537.8	2444.3	2440.0
10°	2777.0	2651.5	2432.9	2348.2	2348.2
12.5°	2766.1	2567.9	2347.8	2285.3	2298.0
15°	2736.0	2437.0	2244.6	2228.8	2258.2
17.5°	2636.7	2314.7	2164.3	2200.0	2234.2
20°	2566.8	2249.0	2116.2	2182.5	2214.5
22.5°	2507.8	2185.8	2081.3	2153.8	2170.8
25°	2430.2	2067.2	2031.5	2094.2	2086.1
27.5°	2337.4	1958.3	1981.8	2020.2	2025.0
30°	2271.8	1892.7	1936.0	1975.0	2009.7
32.5°	2208.5	1816.5	1885.7	1978.2	2057.8
35°	2132.6	1724.1	1810.4	1966.5	2228.2
37.5°	2052.8	1615.0	1734.4	1865.8	1949.1
40°	1996.0	1536.8	1682.1	1844.2	1652.0
42.5°	1934.9	1475.6	1603.4	1812.8	1488.2
45°	1843.2	1365.3	1493.6	1545.7	1313.4
47.5°	1735.0	1279.5	1419.3	1288.9	1198.1
50°	1652.0	1222.1	1384.4	1178.2	1119.6
52.5°	1571.1	1162.6	1360.4	1087.0	1047.4
55°	1455.4	1062.9	1340.7	966.5	958.4
57.5°	1332.5	961.4	1185.6	861.5	875.5
60°	1256.0	895.6	1023.9	799.7	783.6
62.5°	1175.2	831.9	873.2	721.0	705.1
65°	1043.1	730.7	701.8	576.2	576.2
67.5°	897.8	625.5	568.5	471.5	407.4
70°	797.3	557.1	483.3	375.8	333.1
72.5°	690.3	484.1	396.0	308.0	258.8
75°	538.0	372.4	275.8	196.5	191.2
77.5°	388.8	268.2	185.7	145.9	146.3
80°	294.9	204.1	120.2	117.5	120.2
82.5°	207.5	140.2	89.5	93.4	94.0
85°	92.8	60.8	54.6	43.6	40.9
87.5°	19.7	18.2	12.4	12.2	12.2
90°	0.0	3.3	7.8	6.7	6.7
92.5°	16.1	57.8	184.6	60.8	46.9
95°	46.9	142.9	636.3	226.9	139.5
97.5°	88.2	186.0	1080.0	657.8	401.5
100°	115.0	211.1	1247.0	1112.0	721.2
102.5°	145.4	237.9	1226.5	1645.1	1250.8
105°	192.0	277.1	1119.8	2138.7	2025.2
107.5°	242.5	322.6	1018.4	2181.5	2301.8
110°	279.2	352.2	970.2	2128.3	2345.6



TEST NUMBER: P854944

CATALOG NUMBER: SQ2-PH1-125U-125D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	309.5	381.7	939.8	2032.4	2312.5
115°	355.0	423.8	912.1	1879.8	2211.7
117.5°	401.9	463.9	901.3	1739.9	2070.3
120°	428.7	489.8	898.7	1654.0	1973.8
122.5°	454.6	514.9	899.7	1579.4	1877.3
125°	493.4	550.2	899.9	1484.2	1749.4
127.5°	526.8	584.8	899.7	1412.9	1634.0
130°	548.1	607.2	898.7	1372.0	1569.7
132.5°	566.9	628.5	897.8	1334.3	1519.7
135°	596.2	658.4	895.4	1280.9	1444.6
137.5°	624.8	687.4	892.9	1226.6	1372.0
140°	645.3	705.3	892.0	1189.9	1327.4
142.5°	664.9	722.4	892.0	1154.7	1277.4
145°	696.6	747.9	893.1	1103.2	1208.0
147.5°	727.5	772.0	894.7	1059.3	1140.3
150°	748.0	787.3	896.5	1033.1	1101.9
152.5°	768.5	800.8	897.4	1013.2	1068.0
155°	794.8	821.1	898.7	987.7	1024.8
157.5°	819.9	838.7	900.1	969.0	995.0
160°	835.1	850.4	900.9	957.2	978.0
162.5°	848.4	860.3	900.9	947.3	962.7
165°	867.4	875.1	900.9	934.7	945.6
167.5°	880.9	885.6	901.1	925.2	930.9
170°	889.8	892.0	902.0	918.9	921.0
172.5°	896.0	897.4	903.8	915.3	914.8
175°	904.3	904.3	904.3	911.0	908.8
177.5°	907.7	906.8	905.9	910.3	906.8
180°	907.7	907.7	907.7	907.7	907.7



TEST NUMBER: P854944

CATALOG NUMBER: SQ2-PH1-125U-125D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.94	21.82	21.87	22.77	24.00	19.61	20.50	20.55	21.44	22.67
	3H	22.97	23.76	23.91	24.71	25.96	20.65	21.44	21.59	22.40	23.65
	4H	23.70	24.45	24.66	25.41	26.67	20.86	21.61	21.82	22.57	23.83
	6H	24.19	24.87	25.16	25.84	27.11	21.01	21.70	21.98	22.66	23.94
	8H	24.31	24.97	25.29	25.95	27.22	21.04	21.70	22.02	22.68	23.95
	12H	24.36	24.98	25.34	25.96	27.25	21.04	21.66	22.02	22.64	23.94
4H	2H	21.32	22.07	22.28	23.03	24.29	20.26	21.01	21.22	21.97	23.23
	3H	23.43	24.05	24.40	25.04	26.31	21.44	22.06	22.41	23.05	24.33
	4H	24.24	24.81	25.23	25.80	27.09	21.72	22.28	22.70	23.27	24.57
	6H	24.83	25.32	25.82	26.33	27.62	21.93	22.41	22.92	23.42	24.72
	8H	25.00	25.45	26.00	26.46	27.77	21.98	22.44	22.98	23.44	24.75
	12H	25.07	25.48	26.08	26.50	27.81	21.99	22.40	23.01	23.42	24.74
8H	4H	24.26	24.72	25.26	25.72	27.03	21.93	22.39	22.93	23.39	24.70
	6H	24.92	25.29	25.94	26.33	27.64	22.21	22.58	23.23	23.63	24.93
	8H	25.14	25.47	26.17	26.50	27.83	22.31	22.64	23.34	23.67	25.00
	12H	25.26	25.55	26.29	26.57	27.94	22.36	22.65	23.39	23.67	25.04
12H	4H	24.22	24.63	25.23	25.64	26.96	21.93	22.34	22.95	23.36	24.68
	6H	24.89	25.22	25.92	26.25	27.58	22.24	22.57	23.27	23.60	24.93
	8H	25.12	25.41	26.16	26.44	27.81	22.35	22.65	23.39	23.67	25.04