

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854924

Luminaire Tested: SQ2-PP3-0U-125D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854924
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-7)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PP3-0U-125D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1250 LUMENS PER FOOT
DIRECT ONLY
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6505.3 lumens
Efficiency: N/A
Efficacy: 132.2 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 49.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854924

CATALOG NUMBER: SQ2-PP3-0U-125D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

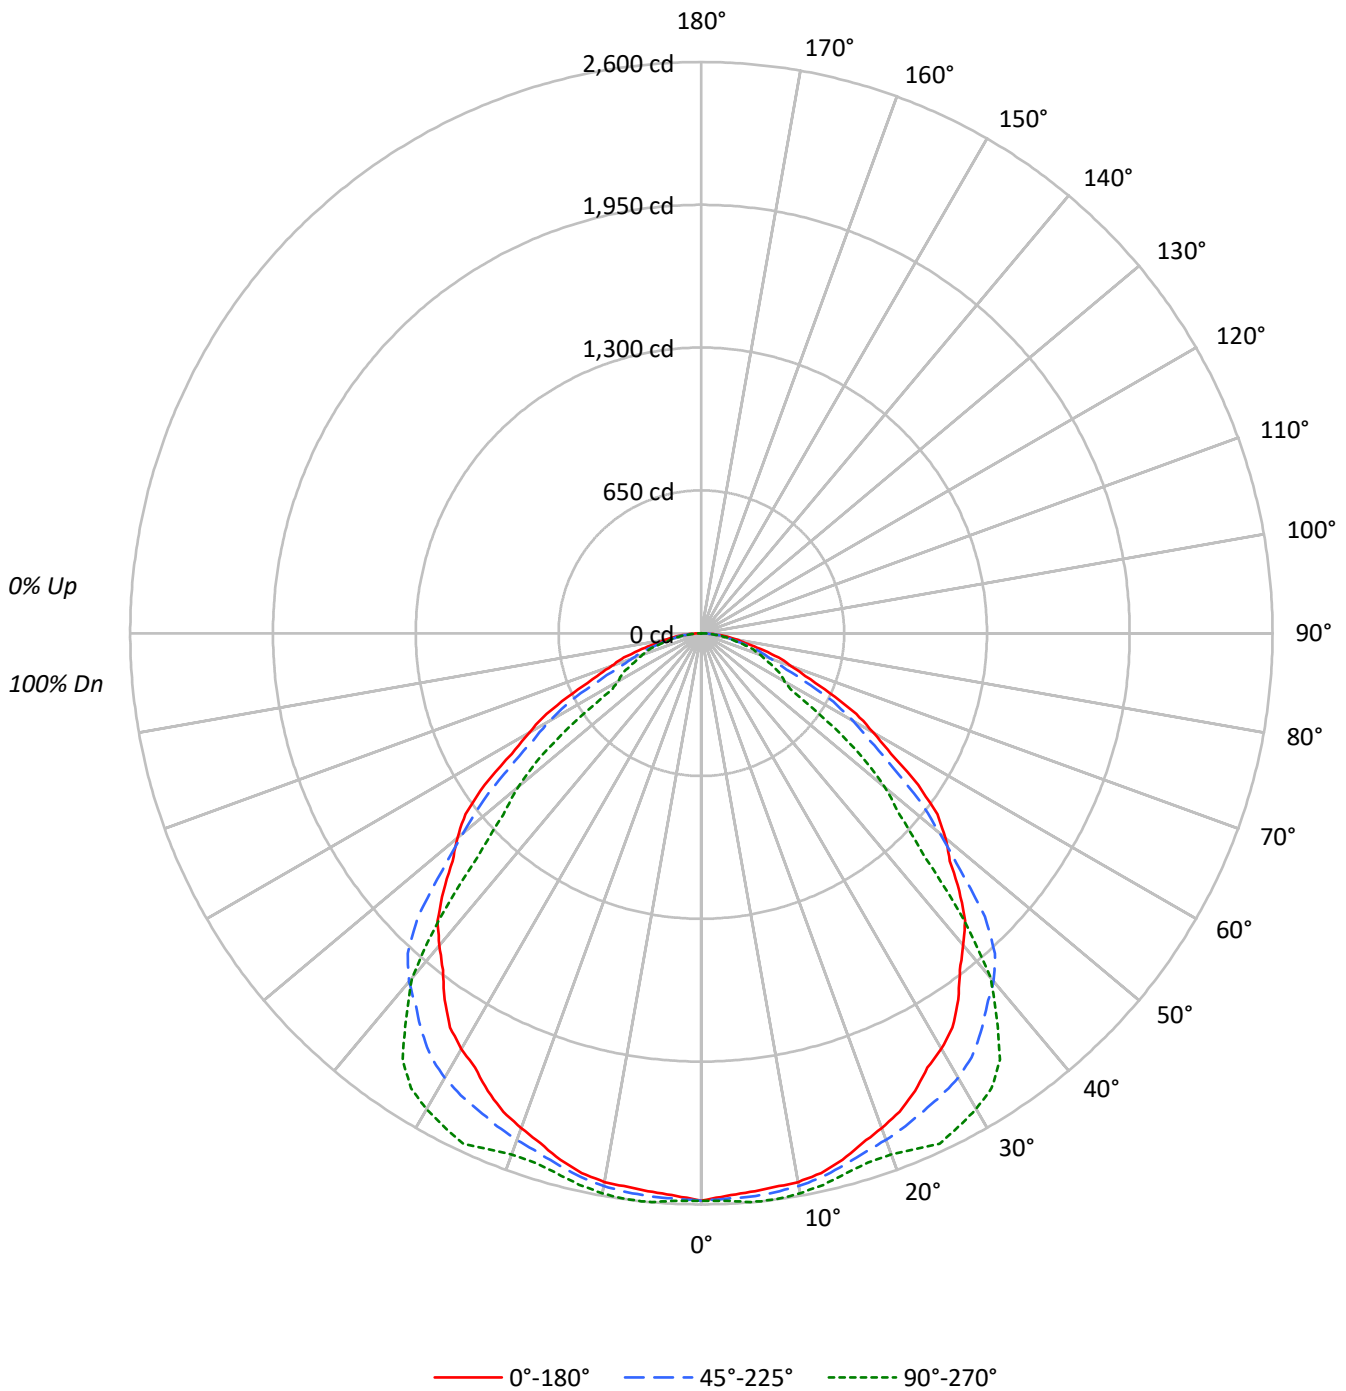



TEST NUMBER: P854924

CATALOG NUMBER: SQ2-PP3-OU-125D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	89	87
2	101	94	88	82	99	92	86	81	88	84	80	85	81	78	82	79	76	74
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	69	66	64
4	86	74	66	60	83	73	66	60	71	64	59	68	63	58	66	61	57	55
5	79	67	59	52	77	66	58	52	64	57	52	62	56	51	60	55	50	48
6	73	61	52	46	71	60	52	46	58	51	46	56	50	45	55	49	45	43
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38
8	63	50	42	37	62	50	42	37	48	41	36	47	41	36	46	40	36	34
9	59	46	38	33	58	46	38	33	45	38	33	44	37	33	43	37	33	31
10	56	43	35	30	54	42	35	30	41	35	30	40	34	30	40	34	30	28

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	41706	41706	41706
5°	41379	41733	42131
10°	41589	41902	42440
15°	41489	41899	42539
20°	41192	42177	43397
25°	40960	42710	45678
30°	40725	43578	46631
35°	40150	43702	46718
40°	39077	43625	43163
45°	37908	41651	32858
50°	36419	35528	27367
55°	33895	29900	19679
60°	29185	25659	14108
65°	24623	19824	13876
70°	20497	15597	13279
75°	17374	13456	12433
80°	14728	11678	11176
85°	11634	9615	6076

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 41651 cd/sqm

TEST NUMBER: P854924

CATALOG NUMBER: SQ2-PP3-OU-125D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	246.0	3.8
10°-20°	711.8	10.9
20°-30°	1115.2	17.1
30°-40°	1375.7	21.1
40°-50°	1295.3	19.9
50°-60°	917.1	14.1
60°-70°	522.6	8.0
70°-80°	258.5	4.0
80°-90°	63.2	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2073.0	31.9
0°-40°	3448.7	53.0
0°-60°	5661.0	87.0
0°-90°	6505.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6505.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2583	2583	2583	2583	2583	
5°	2553	2598	2575	2581	2600	243
15°	2482	2517	2507	2532	2545	699
25°	2299	2358	2397	2494	2564	1059
35°	2037	2093	2217	2344	2370	1270
45°	1660	1786	1824	1546	1439	1278
55°	1204	1276	1062	800	699	1062
65°	644	679	519	366	363	647
75°	278	308	216	202	199	302
85°	63	57	52	41	33	76
90°	0	0	0	0	0	



TEST NUMBER: P854924

CATALOG NUMBER: SQ2-PP3-OU-125D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2583.1	2583.1	2583.1	2583.1	2583.1
2.5°	2563.5	2599.8	2576.5	2581.0	2585.3
5°	2553.1	2598.4	2574.9	2580.8	2599.5
7.5°	2543.3	2589.7	2566.8	2576.5	2599.5
10°	2536.7	2576.7	2555.8	2569.8	2588.6
12.5°	2517.0	2554.9	2536.1	2554.6	2571.1
15°	2482.1	2516.8	2506.6	2531.5	2544.9
17.5°	2434.6	2476.8	2476.7	2511.8	2525.7
20°	2397.4	2448.2	2454.7	2499.1	2525.7
22.5°	2358.1	2417.4	2428.5	2495.1	2541.1
25°	2299.2	2357.8	2397.4	2494.5	2564.0
27.5°	2230.3	2288.5	2370.2	2478.9	2534.0
30°	2184.4	2240.5	2337.4	2450.4	2501.2
32.5°	2127.6	2185.9	2289.3	2411.1	2457.5
35°	2037.0	2093.0	2217.2	2343.5	2370.2
37.5°	1932.7	1996.3	2135.3	2205.8	2207.4
40°	1854.0	1936.8	2069.8	2082.6	2047.9
42.5°	1777.6	1883.9	1978.1	1920.4	1766.2
45°	1660.2	1785.6	1824.1	1545.8	1439.0
47.5°	1535.1	1659.0	1597.9	1296.4	1222.8
50°	1449.9	1567.4	1414.4	1158.9	1089.5
52.5°	1353.8	1458.5	1250.6	1027.1	921.2
55°	1204.1	1276.3	1062.2	800.5	699.1
57.5°	1023.9	1074.7	908.1	600.8	487.1
60°	903.8	943.9	794.6	493.0	436.9
62.5°	794.6	830.3	676.7	428.3	408.5
65°	644.5	679.2	518.9	365.9	363.2
67.5°	512.7	550.7	398.1	319.4	316.2
70°	434.2	474.2	330.4	286.6	281.3
72.5°	368.6	406.6	280.2	251.7	248.5
75°	278.5	307.9	215.7	202.0	199.3
77.5°	202.0	220.7	160.6	153.4	150.7
80°	158.4	166.4	125.6	122.8	120.2
82.5°	119.1	116.3	95.0	92.1	87.4
85°	62.8	57.4	51.9	40.8	32.8
87.5°	19.7	19.7	8.7	6.6	6.6
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P854924

CATALOG NUMBER: SQ2-PP3-OU-125D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	24.40	25.93	24.77	26.24	26.55	20.80	22.32	21.16	22.64	22.95
	3H	25.55	26.91	25.93	27.24	27.60	21.95	23.32	22.33	23.64	24.01
	4H	25.92	27.20	26.32	27.55	27.92	22.45	23.72	22.85	24.07	24.45
	6H	26.17	27.35	26.58	27.71	28.10	22.82	24.00	23.24	24.37	24.76
	8H	26.23	27.36	26.66	27.75	28.15	22.93	24.05	23.35	24.44	24.84
	12H	26.27	27.34	26.70	27.72	28.15	22.96	24.04	23.39	24.42	24.85
4H	2H	24.59	25.87	24.99	26.22	26.59	21.59	22.87	21.99	23.22	23.60
	3H	25.96	27.01	26.37	27.41	27.82	22.90	23.96	23.31	24.36	24.76
	4H	26.46	27.41	26.89	27.82	28.26	23.48	24.43	23.92	24.85	25.29
	6H	26.83	27.65	27.29	28.10	28.56	23.96	24.78	24.42	25.22	25.68
	8H	26.94	27.70	27.40	28.15	28.62	24.09	24.86	24.55	25.30	25.77
	12H	27.00	27.69	27.48	28.17	28.64	24.15	24.83	24.63	25.31	25.78
8H	4H	26.52	27.29	26.99	27.74	28.20	23.80	24.57	24.27	25.01	25.48
	6H	26.98	27.61	27.47	28.10	28.58	24.37	25.00	24.87	25.50	25.97
	8H	27.13	27.70	27.65	28.21	28.70	24.56	25.13	25.07	25.64	26.13
	12H	27.25	27.75	27.76	28.25	28.81	24.66	25.16	25.17	25.66	26.22
12H	4H	26.51	27.20	26.99	27.68	28.15	23.84	24.53	24.32	25.00	25.48
	6H	26.96	27.54	27.48	28.05	28.54	24.42	24.99	24.94	25.50	25.99
	8H	27.16	27.67	27.67	28.16	28.73	24.66	25.17	25.17	25.66	26.22