

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854911

Luminaire Tested: SQ2-PR1-025U-050D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854911
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2308-131-9)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PR1-025U-050D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3812.1 lumens
Efficiency: N/A
Efficacy: 151.3 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.34 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 25.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854911

CATALOG NUMBER: SQ2-PR1-025U-050D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

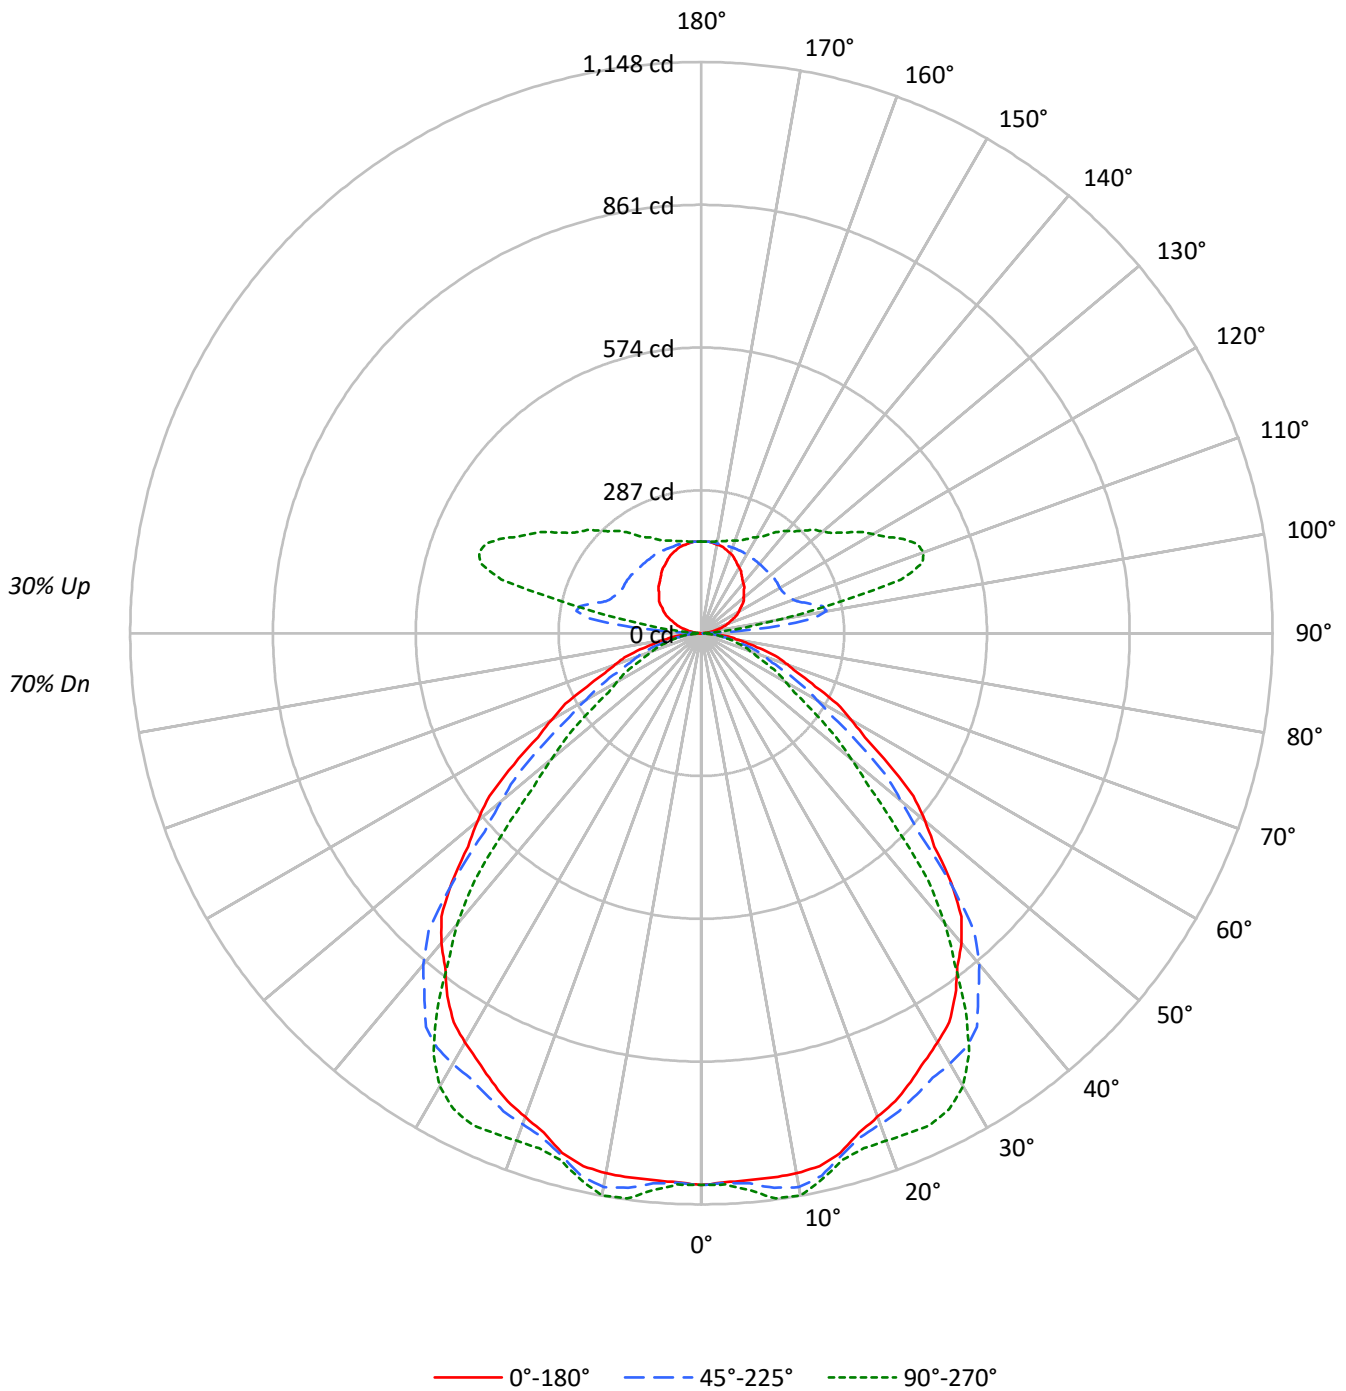



TEST NUMBER: P854911

CATALOG NUMBER: SQ2-PR1-025U-050D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	70				
1	103	99	95	92	97	94	91	88	84	82	80	75	74	72	67	66	65	61				
2	95	88	82	77	89	83	78	73	75	71	67	67	64	61	60	58	56	52				
3	87	78	71	65	82	74	68	62	67	62	58	60	56	53	54	51	48	45				
4	80	69	62	56	75	66	59	54	60	54	50	54	50	46	49	45	42	39				
5	74	62	54	48	70	59	52	47	54	48	44	49	44	40	44	40	37	35				
6	68	56	48	42	64	54	46	41	49	43	38	45	40	36	40	36	33	31				
7	63	51	43	38	60	49	42	36	45	39	34	41	36	32	37	33	30	27				
8	59	47	39	33	56	45	37	32	41	35	31	37	32	29	34	30	27	25				
9	55	43	35	30	52	41	34	29	38	32	28	35	30	26	32	27	24	22				
10	51	39	32	27	49	38	31	26	35	29	25	32	27	24	29	25	22	20				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17909	17909	17909
5°	17885	17995	18216
10°	18074	18536	18815
15°	18068	18161	18313
20°	17775	18048	18649
25°	17726	18228	19417
30°	17706	18634	19604
35°	17538	19032	18252
40°	17133	18326	16063
45°	16212	16084	12702
50°	14740	13150	9854
55°	12954	10821	7671
60°	11208	8654	6316
65°	9677	7171	5528
70°	8700	6349	4910
75°	7973	5502	4517
80°	6936	4417	4417
85°	5020	3983	2093

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 17527 cd/sqm



TEST NUMBER: P854911

CATALOG NUMBER: SQ2-PR1-025U-050D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.1	2.8
10°-20°	310.1	8.1
20°-30°	479.3	12.6
30°-40°	576.5	15.1
40°-50°	517.6	13.6
50°-60°	346.8	9.1
60°-70°	201.7	5.3
70°-80°	103.6	2.7
80°-90°	26.0	0.7
90°-100°	74.5	2.0
100°-110°	231.9	6.1
110°-120°	226.9	6.0
120°-130°	185.2	4.9
130°-140°	151.5	4.0
140°-150°	118.3	3.1
150°-160°	85.3	2.2
160°-170°	52.2	1.4
170°-180°	17.6	0.5
0°-30°	896.5	23.5
0°-40°	1473.0	38.6
0°-60°	2337.4	61.3
0°-90°	2668.7	70.0
90°-120°	533.3	14.0
90°-150°	988.3	25.9
90°-180°	1143.0	30.0
0°-180°	3812.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1109	1109	1109	1109	1109	
5°	1104	1122	1110	1113	1124	105
15°	1081	1125	1086	1090	1096	304
25°	995	1035	1023	1061	1090	459
35°	890	898	966	947	926	555
45°	710	768	704	594	556	543
55°	460	478	384	297	272	414
65°	253	259	188	152	145	256
75°	128	124	88	75	72	136
85°	27	22	22	15	11	34
90°	0	1	3	3	3	1
95°	10	30	137	50	33	12
105°	41	57	228	436	416	43
115°	72	86	185	382	448	71
125°	101	112	183	301	353	89
135°	121	134	182	260	292	94
145°	141	152	182	224	244	89
155°	162	167	183	201	208	75
165°	177	178	184	190	192	50
175°	184	184	184	185	184	17
180°	184	184	184	184	184	



TEST NUMBER: P854911

CATALOG NUMBER: SQ2-PR1-025U-050D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1109.2	1109.2	1109.2	1109.2	1109.2
2.5°	1104.6	1117.9	1105.5	1106.6	1109.2
5°	1103.5	1122.3	1110.3	1112.8	1123.9
7.5°	1103.3	1130.1	1124.3	1131.2	1145.8
10°	1102.4	1134.5	1130.6	1132.1	1147.6
12.5°	1096.9	1134.4	1117.1	1115.7	1124.1
15°	1080.9	1125.1	1086.5	1090.1	1095.6
17.5°	1052.6	1098.9	1062.1	1074.6	1085.4
20°	1034.5	1079.9	1050.4	1066.6	1085.4
22.5°	1018.3	1063.6	1039.5	1062.2	1088.1
25°	995.0	1034.8	1023.2	1061.2	1089.9
27.5°	970.5	993.9	1007.6	1058.5	1078.6
30°	949.7	965.2	999.5	1043.8	1051.5
32.5°	927.1	936.4	988.6	1011.7	1001.7
35°	889.8	897.6	965.6	947.0	926.0
37.5°	845.5	861.4	913.8	860.3	836.2
40°	812.9	839.5	869.5	789.8	762.1
42.5°	773.1	815.6	810.7	709.0	675.2
45°	710.0	767.6	704.4	593.8	556.3
47.5°	635.6	694.7	591.3	492.6	457.5
50°	586.8	634.3	523.5	431.0	392.3
52.5°	537.1	571.3	465.6	373.2	338.1
55°	460.2	477.8	384.4	296.8	272.5
57.5°	389.6	400.9	314.1	239.7	221.8
60°	347.1	354.8	268.0	210.0	195.6
62.5°	308.2	314.2	230.9	184.7	173.9
65°	253.3	258.8	187.7	152.4	144.7
67.5°	209.6	212.4	154.4	126.7	119.4
70°	184.3	185.4	134.5	109.6	104.0
72.5°	161.7	160.1	115.6	95.1	91.4
75°	127.8	124.5	88.2	74.6	72.4
77.5°	95.4	91.9	62.0	57.4	57.4
80°	74.6	70.2	47.5	47.5	47.5
82.5°	55.6	49.4	36.6	36.6	35.7
85°	27.1	21.6	21.5	14.6	11.3
87.5°	7.2	7.5	3.4	3.4	3.4
90°	0.0	1.1	3.4	3.4	3.4
92.5°	3.6	12.7	43.2	14.1	11.5
95°	10.2	30.1	136.8	50.4	32.8
97.5°	18.5	39.1	226.5	141.0	88.9
100°	24.9	43.6	255.4	238.9	159.4
102.5°	31.2	49.1	250.0	341.2	267.8
105°	40.7	57.3	228.3	435.9	416.0
107.5°	50.2	65.7	207.5	443.1	465.0
110°	56.5	72.0	196.6	432.7	475.9



TEST NUMBER: P854911

CATALOG NUMBER: SQ2-PR1-025U-050D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	62.9	77.4	191.2	414.0	468.7
115°	72.4	85.6	185.3	382.4	447.6
117.5°	81.6	93.7	182.8	352.1	418.9
120°	87.1	99.2	181.9	334.9	399.0
122.5°	92.5	104.6	182.8	320.3	379.1
125°	100.6	111.6	183.1	300.8	352.6
127.5°	107.2	118.4	183.1	286.1	330.3
130°	110.8	122.9	183.1	277.8	317.6
132.5°	115.3	127.4	182.1	270.6	307.6
135°	121.0	134.2	181.9	259.6	291.6
137.5°	127.5	139.6	181.9	248.6	277.8
140°	131.2	143.3	181.9	241.4	267.8
142.5°	135.7	146.9	181.9	234.0	257.9
145°	141.3	152.3	181.9	224.2	244.1
147.5°	148.1	157.6	183.1	215.2	230.8
150°	152.6	160.3	183.1	210.5	222.6
152.5°	156.3	163.0	183.1	205.9	216.3
155°	161.7	167.1	183.1	201.4	207.9
157.5°	167.1	171.3	183.1	197.2	201.4
160°	170.7	174.0	183.1	194.5	197.7
162.5°	173.3	175.8	183.1	192.7	195.0
165°	177.4	178.5	184.2	189.9	192.1
167.5°	179.9	180.1	183.1	188.4	189.4
170°	180.8	181.9	183.1	186.6	187.6
172.5°	182.6	182.8	184.0	185.7	185.8
175°	184.2	184.2	184.2	185.3	184.2
177.5°	184.2	184.2	184.2	184.2	184.2
180°	184.2	184.2	184.2	184.2	184.2



TEST NUMBER: P854911

CATALOG NUMBER: SQ2-PR1-025U-050D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.50	19.51	19.28	20.30	21.26	15.23	16.24	16.00	17.03	17.99
	3H	19.75	20.65	20.54	21.45	22.44	16.31	17.21	17.09	18.01	19.00
	4H	20.21	21.06	21.01	21.86	22.86	16.71	17.56	17.52	18.37	19.37
	6H	20.53	21.31	21.35	22.13	23.14	17.05	17.83	17.87	18.65	19.66
	8H	20.62	21.36	21.45	22.20	23.21	17.14	17.89	17.97	18.72	19.73
	12H	20.65	21.36	21.48	22.19	23.23	17.16	17.86	17.99	18.69	19.73
4H	2H	18.60	19.45	19.41	20.26	21.26	15.82	16.67	16.63	17.47	18.47
	3H	20.09	20.79	20.91	21.63	22.65	17.10	17.80	17.92	18.64	19.66
	4H	20.69	21.32	21.52	22.16	23.21	17.61	18.25	18.44	19.09	20.13
	6H	21.15	21.70	22.00	22.56	23.61	18.05	18.60	18.90	19.47	20.51
	8H	21.28	21.80	22.14	22.65	23.71	18.18	18.69	19.03	19.55	20.61
	12H	21.34	21.80	22.22	22.68	23.75	18.21	18.67	19.08	19.55	20.61
8H	4H	20.72	21.24	21.58	22.10	23.16	17.93	18.44	18.78	19.30	20.36
	6H	21.28	21.70	22.16	22.60	23.66	18.47	18.89	19.35	19.79	20.85
	8H	21.48	21.85	22.37	22.75	23.83	18.65	19.03	19.54	19.92	21.00
	12H	21.59	21.92	22.48	22.80	23.94	18.72	19.05	19.61	19.94	21.07
12H	4H	20.69	21.15	21.56	22.03	23.09	17.95	18.41	18.82	19.29	20.35
	6H	21.26	21.64	22.16	22.54	23.61	18.53	18.90	19.42	19.80	20.88
	8H	21.48	21.81	22.37	22.70	23.83	18.74	19.07	19.63	19.96	21.09