

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854870

Luminaire Tested: SQ2-PW1-0U-075D-830-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854870
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-0U-075D-830-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 750 LUMENS PER FOOT
DIRECT ONLY
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3799.9 lumens
Efficiency: N/A
Efficacy: 142.3 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 26.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854870
CATALOG NUMBER: SQ2-PW1-0U-075D-830-UNV-STD-W-4

Luminous Intensity Polar Plot

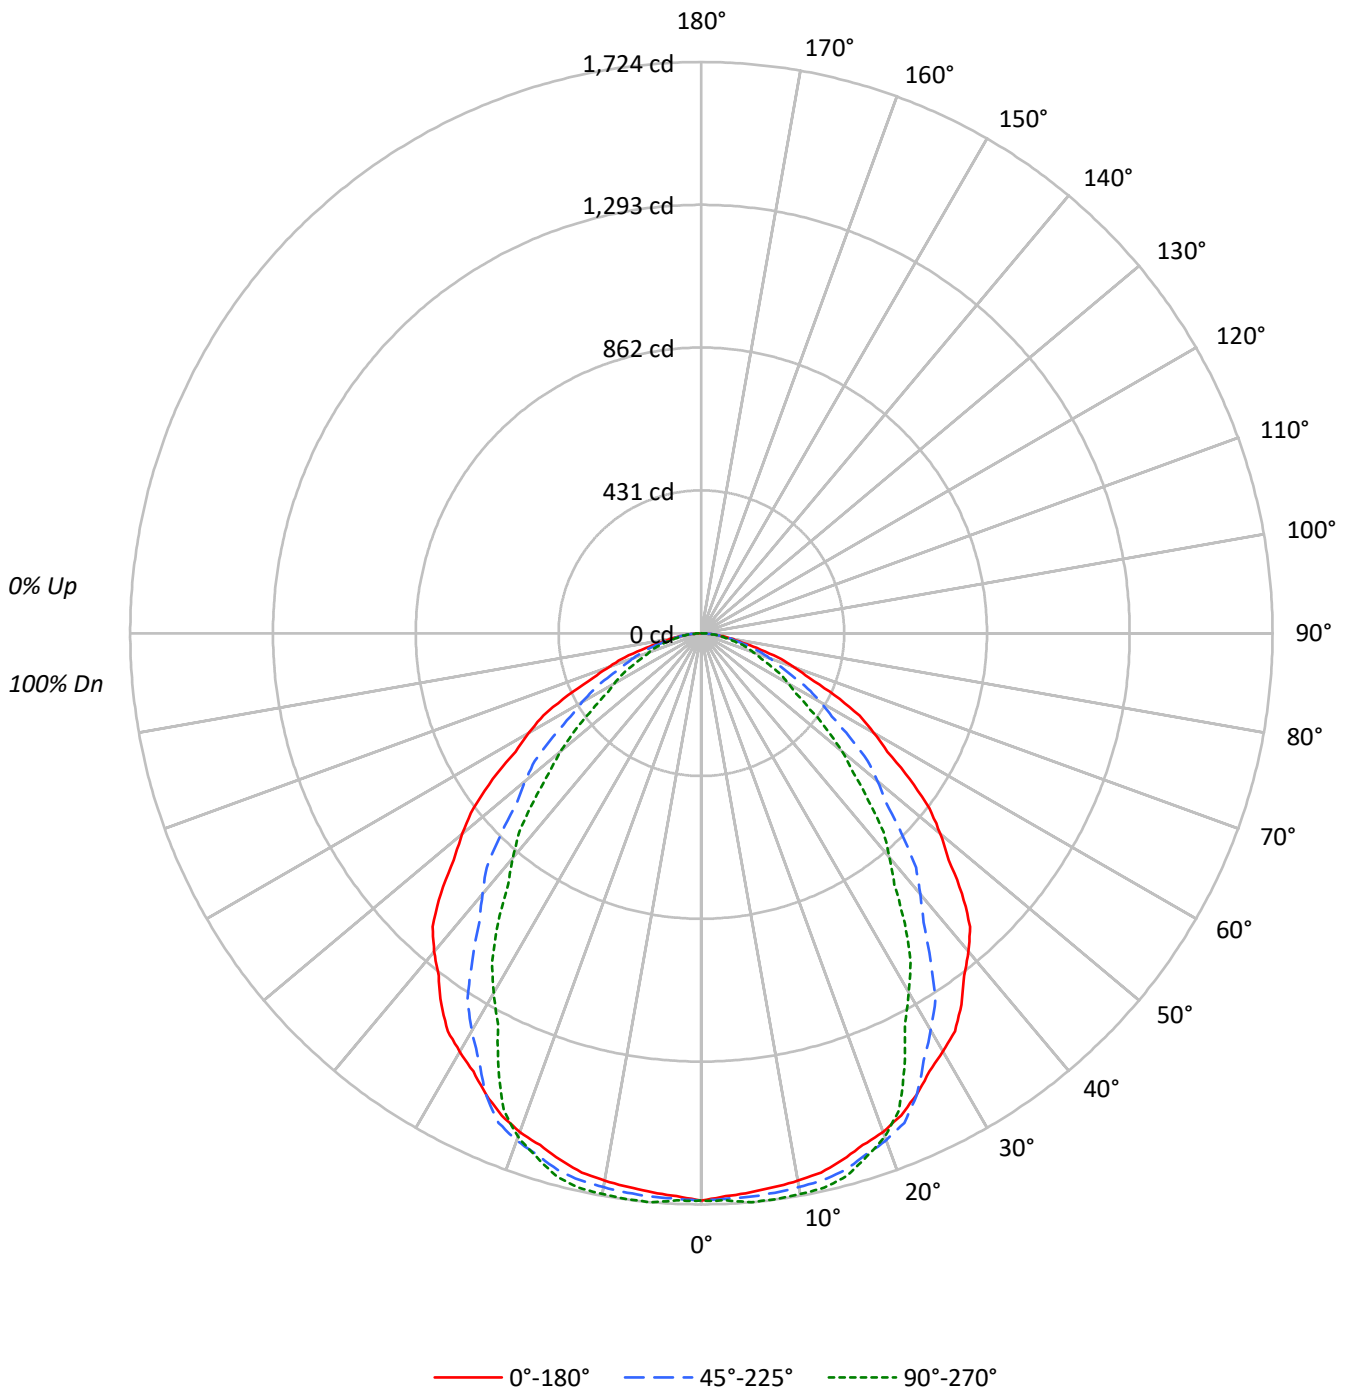



TEST NUMBER: P854870

CATALOG NUMBER: SQ2-PW1-0U-075D-830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100	
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			87	
2	101	94	88	83	99	92	87	82	89	84	80	85	82	78	82	79	76	74			74	
3	93	84	76	70	91	82	75	70	79	73	69	77	72	67	74	70	66	64			64	
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56			56	
5	80	68	59	53	78	67	59	53	65	58	52	63	57	52	61	56	51	49			49	
6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	56	50	46	44			44	
7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	51	46	41	39			39	
8	64	52	44	38	63	51	43	38	50	43	38	48	42	37	47	42	37	35			35	
9	60	48	40	35	59	47	40	34	46	39	34	45	39	34	44	38	34	32			32	
10	57	44	37	32	55	44	36	31	43	36	31	42	36	31	41	35	31	29			29	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	27651	27651	27651
5°	27465	27678	27942
10°	27516	27837	28184
15°	27510	28027	28354
20°	27520	27996	27801
25°	27371	27401	25832
30°	27186	25818	23353
35°	26972	23759	21088
40°	26435	21657	18632
45°	25398	19479	16276
50°	23639	17412	13931
55°	21627	15381	11296
60°	19385	13378	9746
65°	16951	11530	8661
70°	13860	10244	7851
75°	10786	8852	7224
80°	8043	7578	6369
85°	5446	5743	3631

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25398 cd/sqm



TEST NUMBER: P854870

CATALOG NUMBER: SQ2-PW1-0U-075D-830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	163.1	4.3
10°-20°	472.5	12.4
20°-30°	695.3	18.3
30°-40°	760.2	20.0
40°-50°	682.0	17.9
50°-60°	508.8	13.4
60°-70°	321.5	8.5
70°-80°	159.3	4.2
80°-90°	37.3	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1330.9	35.0
0°-40°	2091.2	55.0
0°-60°	3281.9	86.4
0°-90°	3799.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3799.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1713	1713	1713	1713	1713	
5°	1695	1722	1708	1710	1724	161
15°	1646	1678	1677	1688	1696	465
25°	1536	1570	1538	1474	1450	708
35°	1368	1354	1205	1100	1070	853
45°	1112	1023	853	746	713	853
55°	768	695	546	428	401	686
65°	444	407	302	243	227	440
75°	173	186	142	119	116	190
85°	29	37	31	21	20	38
90°	0	0	0	0	0	



TEST NUMBER: P854870

CATALOG NUMBER: SQ2-PW1-0U-075D-830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1712.6	1712.6	1712.6	1712.6	1712.6
2.5°	1700.8	1722.5	1708.7	1710.1	1713.9
5°	1694.6	1721.7	1707.7	1709.6	1724.0
7.5°	1686.1	1713.6	1703.1	1709.0	1723.0
10°	1678.3	1707.0	1697.9	1706.4	1719.1
12.5°	1667.9	1697.9	1691.4	1701.2	1713.9
15°	1645.8	1677.6	1676.7	1688.3	1696.3
17.5°	1620.0	1651.9	1650.3	1653.3	1657.2
20°	1601.7	1633.6	1629.4	1618.0	1618.0
22.5°	1575.6	1610.0	1599.4	1568.2	1558.0
25°	1536.4	1569.9	1538.1	1473.9	1450.0
27.5°	1490.8	1517.9	1453.9	1362.8	1329.6
30°	1458.2	1478.9	1384.8	1284.5	1252.6
32.5°	1424.3	1432.2	1314.3	1210.1	1175.6
35°	1368.4	1354.1	1205.4	1100.2	1069.9
37.5°	1302.5	1259.8	1100.7	990.6	957.1
40°	1254.2	1193.6	1027.5	917.5	884.0
42.5°	1200.7	1124.9	958.4	848.3	813.6
45°	1112.3	1023.1	853.1	746.2	712.8
47.5°	1012.8	924.2	754.5	651.1	622.4
50°	941.1	855.0	693.2	589.6	554.6
52.5°	868.0	790.9	633.2	526.8	478.8
55°	768.3	694.9	546.4	428.4	401.3
57.5°	665.5	602.0	467.7	360.6	338.3
60°	600.3	544.4	414.3	324.0	301.8
62.5°	537.6	488.1	362.1	290.2	271.7
65°	443.7	406.9	301.8	242.6	226.7
67.5°	352.3	331.8	250.9	199.1	188.6
70°	293.6	287.2	217.0	174.3	166.3
72.5°	242.7	245.2	184.3	150.9	145.5
75°	172.9	185.7	141.9	118.9	115.8
77.5°	117.8	136.9	105.0	88.0	85.5
80°	86.5	105.6	81.5	68.5	68.5
82.5°	60.4	75.6	58.1	51.6	51.6
85°	29.4	37.3	31.0	21.1	19.6
87.5°	7.8	11.6	5.2	4.0	4.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P854870

CATALOG NUMBER: SQ2-PW1-0U-075D-830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	22.50	24.01	22.87	24.32	24.64	18.99	20.49	19.36	20.81	21.12
	3H	23.87	25.22	24.25	25.55	25.91	20.24	21.59	20.62	21.92	22.28
	4H	24.28	25.54	24.68	25.89	26.26	20.72	21.98	21.12	22.33	22.71
	6H	24.51	25.67	24.92	26.04	26.43	21.06	22.23	21.48	22.60	22.99
	8H	24.56	25.67	24.99	26.06	26.46	21.16	22.26	21.58	22.65	23.06
	12H	24.58	25.64	25.01	26.02	26.45	21.19	22.25	21.62	22.63	23.06
4H	2H	22.68	23.94	23.08	24.29	24.67	19.75	21.01	20.15	21.36	21.74
	3H	24.28	25.33	24.69	25.73	26.13	21.19	22.23	21.60	22.64	23.04
	4H	24.81	25.75	25.25	26.17	26.61	21.76	22.70	22.19	23.11	23.55
	6H	25.18	25.99	25.64	26.44	26.90	22.20	23.01	22.65	23.45	23.91
	8H	25.27	26.03	25.73	26.47	26.94	22.31	23.07	22.78	23.52	23.99
	12H	25.31	25.99	25.80	26.47	26.94	22.36	23.04	22.85	23.52	23.99
8H	4H	24.90	25.66	25.36	26.10	26.57	22.13	22.89	22.59	23.34	23.80
	6H	25.36	25.98	25.85	26.48	26.95	22.66	23.29	23.16	23.78	24.26
	8H	25.50	26.07	26.02	26.58	27.06	22.82	23.39	23.34	23.90	24.39
	12H	25.60	26.09	26.11	26.59	27.15	22.91	23.41	23.42	23.90	24.47
12H	4H	24.88	25.56	25.37	26.04	26.51	22.17	22.85	22.66	23.33	23.80
	6H	25.35	25.91	25.86	26.42	26.91	22.72	23.29	23.24	23.80	24.29
	8H	25.54	26.04	26.05	26.53	27.09	22.94	23.44	23.45	23.93	24.49