

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P853893

Luminaire Tested: SQ2-FB-125U-125D-930-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P853893
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FB-125U-125D-930-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9538.7 lumens
Efficiency: N/A
Efficacy: 102.5 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.56
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 93.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P853893

CATALOG NUMBER: SQ2-FB-125U-125D-930-UNV-STD-W-4

Luminous Intensity Polar Plot

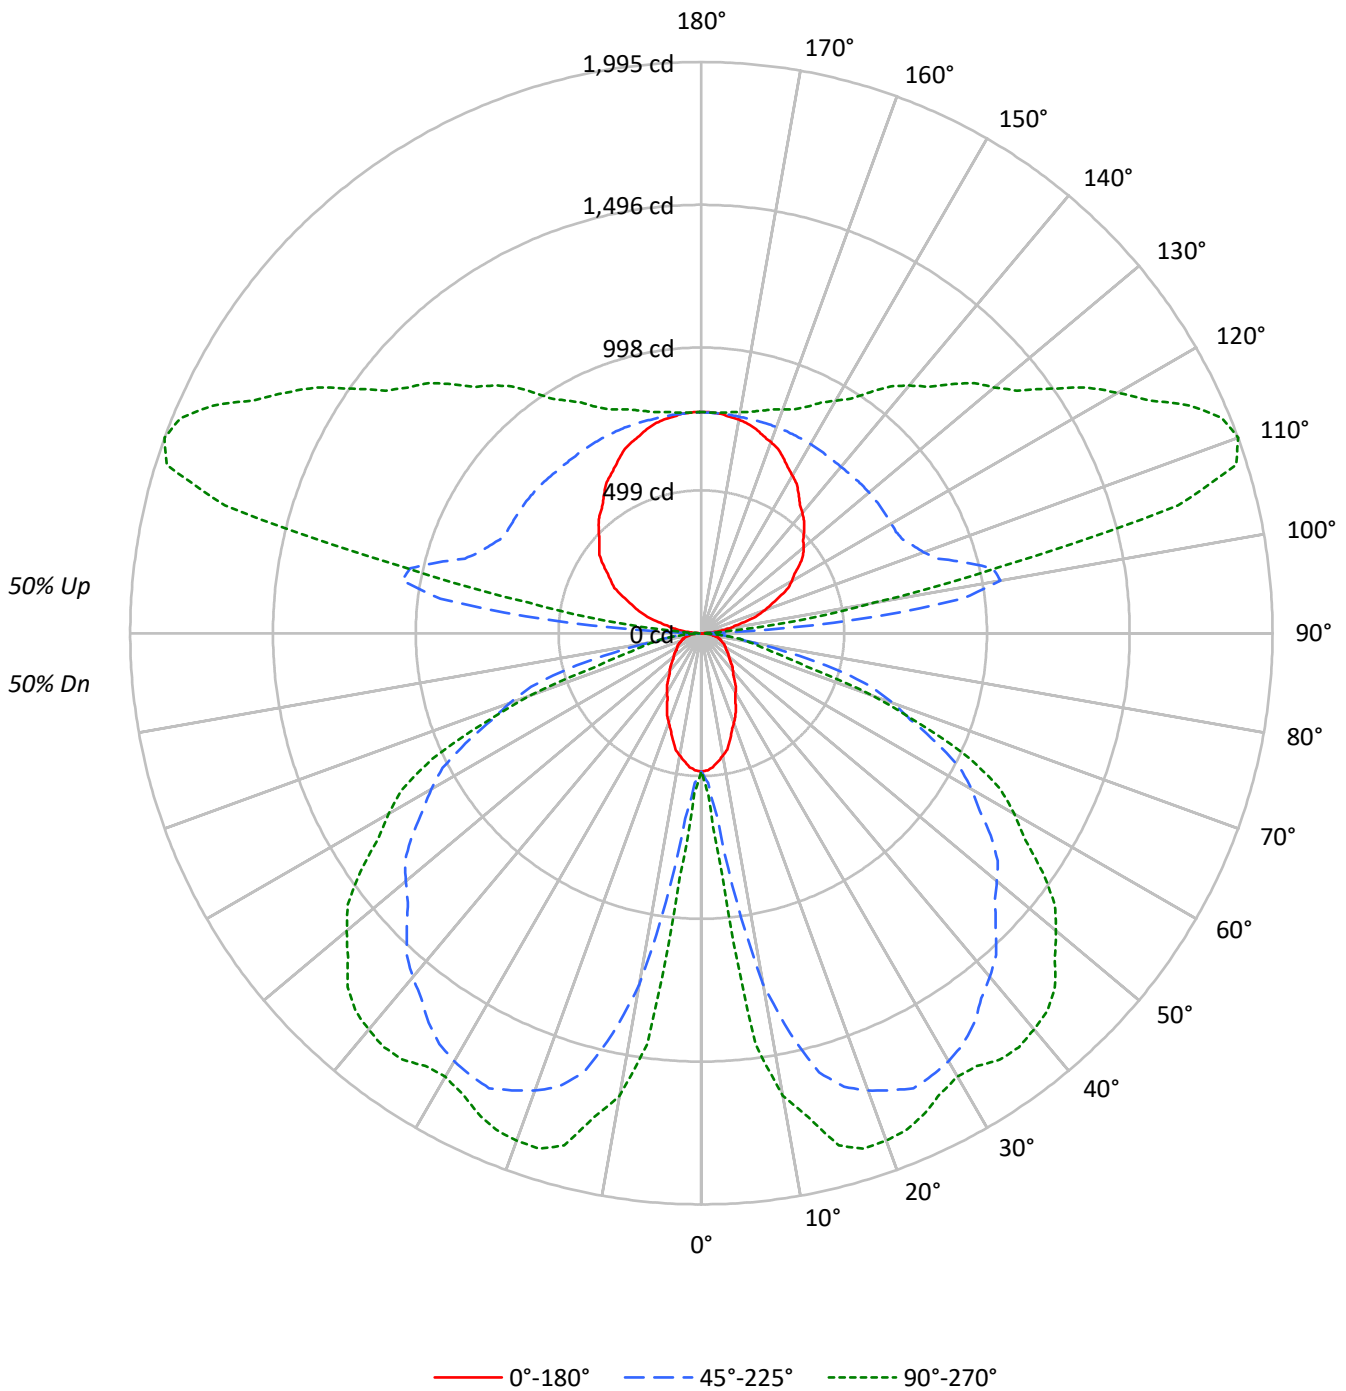



TEST NUMBER: P853893

CATALOG NUMBER: SQ2-FB-125U-125D-930-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	93	89	86	90	86	83	80	73	70	68	61	59	57	49	48	47	42
2	89	81	75	69	81	75	69	65	63	59	56	53	50	47	43	41	39	34
3	80	71	63	57	74	65	59	54	55	50	46	46	43	39	38	35	33	29
4	73	62	54	48	67	58	50	45	49	43	39	41	37	33	33	30	28	24
5	67	55	47	41	61	51	44	38	43	38	33	36	32	28	30	26	24	20
6	62	49	41	35	56	46	38	33	39	33	29	33	28	25	27	23	21	18
7	57	44	36	30	52	41	34	28	35	29	25	29	25	21	24	21	18	15
8	52	40	32	26	48	37	30	25	32	26	22	27	22	19	22	18	16	13
9	49	36	29	23	45	34	27	22	29	23	19	24	20	17	20	17	14	12
10	45	33	26	21	42	31	24	20	26	21	17	22	18	15	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7800	7800	7800
5°	7605	10541	13817
10°	7122	20412	26886
15°	6445	26557	30945
20°	5708	29215	32407
25°	5049	31242	32938
30°	4460	32175	33346
35°	3983	32735	35847
40°	3623	33046	38088
45°	3341	33202	39884
50°	3150	33840	40609
55°	3074	34719	40932
60°	3152	35179	40729
65°	3282	34697	39580
70°	3399	33555	29934
75°	3768	30137	16519
80°	3887	15546	15332
85°	3872	10763	6447

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 52.5°
 Luminance: 41301 cd/sqm



TEST NUMBER: P853893

CATALOG NUMBER: SQ2-FB-125U-125D-930-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.9	0.8
10°-20°	369.5	3.9
20°-30°	650.1	6.8
30°-40°	841.5	8.8
40°-50°	928.1	9.7
50°-60°	866.5	9.1
60°-70°	669.7	7.0
70°-80°	308.9	3.2
80°-90°	59.8	0.6
90°-100°	295.3	3.1
100°-110°	961.5	10.1
110°-120°	951.1	10.0
120°-130°	777.3	8.1
130°-140°	635.3	6.7
140°-150°	494.8	5.2
150°-160°	356.7	3.7
160°-170°	218.0	2.3
170°-180°	73.6	0.8
0°-30°	1100.5	11.5
0°-40°	1942.0	20.4
0°-60°	3736.5	39.2
0°-90°	4775.0	50.1
90°-120°	2208.0	23.1
90°-150°	4115.4	43.1
90°-180°	4764.0	49.9
0°-180°	9538.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	483	483	483	483	483	
5°	469	537	650	793	852	44
15°	386	760	1589	1779	1851	107
25°	283	1022	1754	1831	1849	130
35°	202	986	1661	1719	1819	127
45°	146	755	1454	1670	1747	113
55°	109	450	1233	1418	1454	98
65°	86	254	908	1018	1036	84
75°	60	156	483	260	265	62
85°	21	46	58	39	35	22
90°	0	3	7	6	6	3
95°	40	122	541	193	119	46
105°	163	236	952	1819	1723	174
115°	302	360	776	1599	1881	299
125°	420	468	765	1262	1488	374
135°	507	560	762	1090	1229	392
145°	593	636	760	938	1028	371
155°	676	698	764	840	872	311
165°	738	744	766	795	804	208
175°	769	769	769	775	773	73
180°	772	772	772	772	772	



TEST NUMBER: P853893

CATALOG NUMBER: SQ2-FB-125U-125D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	483.1	483.1	483.1	483.1	483.1
2.5°	479.4	499.4	522.2	548.4	559.3
5°	469.2	537.3	650.4	793.4	852.5
7.5°	451.1	589.6	945.8	1328.5	1446.6
10°	434.4	627.4	1245.0	1576.3	1639.9
12.5°	415.8	677.9	1432.7	1665.5	1730.9
15°	385.6	760.3	1588.8	1778.6	1851.3
17.5°	354.5	853.2	1661.3	1848.4	1888.0
20°	332.2	918.1	1700.3	1861.1	1886.1
22.5°	311.7	966.7	1728.2	1850.0	1876.8
25°	283.4	1021.5	1753.7	1830.8	1848.9
27.5°	256.0	1035.9	1742.6	1793.1	1810.9
30°	239.2	1031.9	1725.8	1763.6	1788.6
32.5°	224.4	1020.7	1701.7	1738.2	1792.3
35°	202.1	985.6	1660.8	1718.8	1818.7
37.5°	183.0	929.3	1606.9	1725.7	1822.0
40°	171.9	887.3	1567.9	1725.4	1807.1
42.5°	160.7	838.0	1523.3	1706.8	1788.6
45°	146.3	755.0	1454.1	1669.5	1746.7
47.5°	132.9	661.6	1390.0	1617.9	1674.3
50°	125.4	597.8	1347.2	1571.2	1616.7
52.5°	118.0	535.9	1304.5	1515.4	1557.2
55°	109.2	449.8	1233.4	1417.7	1454.1
57.5°	101.3	376.1	1152.6	1309.8	1339.3
60°	97.6	336.0	1089.4	1231.8	1261.3
62.5°	92.0	299.6	1018.8	1149.9	1177.7
65°	85.9	254.0	908.2	1017.8	1036.0
67.5°	77.6	220.2	790.7	857.7	823.7
70°	72.0	203.7	710.8	731.8	634.1
72.5°	68.3	185.5	623.4	568.1	383.3
75°	60.4	155.8	483.1	260.3	264.8
77.5°	49.2	120.6	317.8	199.9	203.9
80°	41.8	98.6	167.2	162.6	164.9
82.5°	34.4	76.6	115.2	119.8	116.6
85°	20.9	45.9	58.1	39.4	34.8
87.5°	7.4	17.1	10.6	10.4	10.4
90°	0.0	2.8	6.6	5.7	5.7
92.5°	13.7	49.1	157.1	51.8	39.9
95°	39.9	121.6	541.3	193.0	118.7
97.5°	75.0	158.2	918.7	559.5	341.5
100°	97.8	179.5	1060.8	945.9	613.5
102.5°	123.6	202.4	1043.3	1399.4	1064.0
105°	163.3	235.8	952.5	1819.3	1722.7
107.5°	206.3	274.4	866.3	1855.7	1958.1
110°	237.4	299.6	825.3	1810.5	1995.3



TEST NUMBER: P853893

CATALOG NUMBER: SQ2-FB-125U-125D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	263.3	324.7	799.4	1728.9	1967.2
115°	302.0	360.5	775.9	1599.0	1881.3
117.5°	341.9	394.6	766.8	1480.1	1761.1
120°	364.7	416.7	764.5	1407.0	1679.1
122.5°	386.7	438.0	765.3	1343.5	1597.0
125°	419.8	468.0	765.4	1262.5	1488.2
127.5°	448.1	497.5	765.3	1201.8	1390.0
130°	466.3	516.4	764.5	1167.2	1335.3
132.5°	482.3	534.6	763.7	1135.0	1292.7
135°	507.1	560.1	761.7	1089.6	1228.9
137.5°	531.4	584.7	759.6	1043.5	1167.2
140°	548.9	600.0	758.8	1012.2	1129.2
142.5°	565.6	614.5	758.8	982.3	1086.6
145°	592.6	636.2	759.8	938.4	1027.6
147.5°	618.8	656.7	761.1	901.1	970.0
150°	636.3	669.7	762.6	878.8	937.3
152.5°	653.8	681.3	763.4	861.9	908.5
155°	676.2	698.5	764.5	840.2	871.8
157.5°	697.5	713.4	765.6	824.3	846.4
160°	710.4	723.4	766.4	814.3	831.9
162.5°	721.8	731.8	766.4	805.8	819.0
165°	737.9	744.4	766.4	795.1	804.4
167.5°	749.3	753.4	766.6	787.0	791.9
170°	756.9	758.8	767.3	781.6	783.5
172.5°	762.2	763.3	768.9	778.5	778.2
175°	769.2	769.2	769.2	774.9	773.0
177.5°	772.1	771.4	770.6	774.3	771.3
180°	772.1	772.1	772.1	772.1	772.1

TEST NUMBER: P853893

CATALOG NUMBER: SQ2-FB-125U-125D-930-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.21	15.09	15.16	16.06	17.33	22.94	23.83	23.89	24.80	26.07
	3H	14.94	15.74	15.90	16.72	18.01	24.57	25.36	25.53	26.34	27.63
	4H	15.24	15.99	16.22	16.98	18.28	24.75	25.50	25.73	26.49	27.79
	6H	15.46	16.15	16.45	17.14	18.45	24.84	25.53	25.82	26.52	27.83
	8H	15.52	16.18	16.51	17.18	18.49	24.84	25.50	25.84	26.51	27.82
	12H	15.55	16.18	16.55	17.18	18.51	24.81	25.44	25.81	26.44	27.78
4H	2H	18.61	19.36	19.59	20.35	21.65	23.39	24.14	24.37	25.13	26.43
	3H	19.54	20.17	20.54	21.19	22.50	25.22	25.85	26.21	26.86	28.17
	4H	19.83	20.40	20.83	21.41	22.75	25.46	26.03	26.46	27.04	28.37
	6H	19.96	20.46	20.97	21.49	22.82	25.60	26.10	26.62	27.13	28.46
	8H	19.98	20.44	21.00	21.47	22.82	25.63	26.09	26.64	27.11	28.46
	12H	19.98	20.39	21.01	21.43	22.79	25.60	26.02	26.64	27.06	28.41
8H	4H	21.01	21.47	22.02	22.49	23.84	25.58	26.04	26.59	27.06	28.41
	6H	21.24	21.62	22.28	22.69	24.04	25.78	26.16	26.82	27.23	28.58
	8H	21.32	21.65	22.36	22.70	24.07	25.85	26.18	26.89	27.23	28.60
	12H	21.34	21.64	22.40	22.68	24.09	25.84	26.13	26.89	27.18	28.59
12H	4H	21.02	21.44	22.06	22.48	23.83	25.53	25.95	26.56	26.99	28.34
	6H	21.34	21.67	22.39	22.72	24.09	25.77	26.10	26.81	27.15	28.52
	8H	21.44	21.74	22.50	22.78	24.19	25.84	26.13	26.89	27.17	28.58