

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854271

Luminaire Tested: SQ2-PW1-075U-075D-930-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P854271  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-PW1-075U-075D-930-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 750 LUMENS PER FOOT  
UPLIGHT 750 LUMENS PER FOOT  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6095.7 lumens  
Efficiency: N/A  
Efficacy: 121.9 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 50  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P854271

CATALOG NUMBER: SQ2-PW1-075U-075D-930-UNV-STD-W-4

### Luminous Intensity Polar Plot

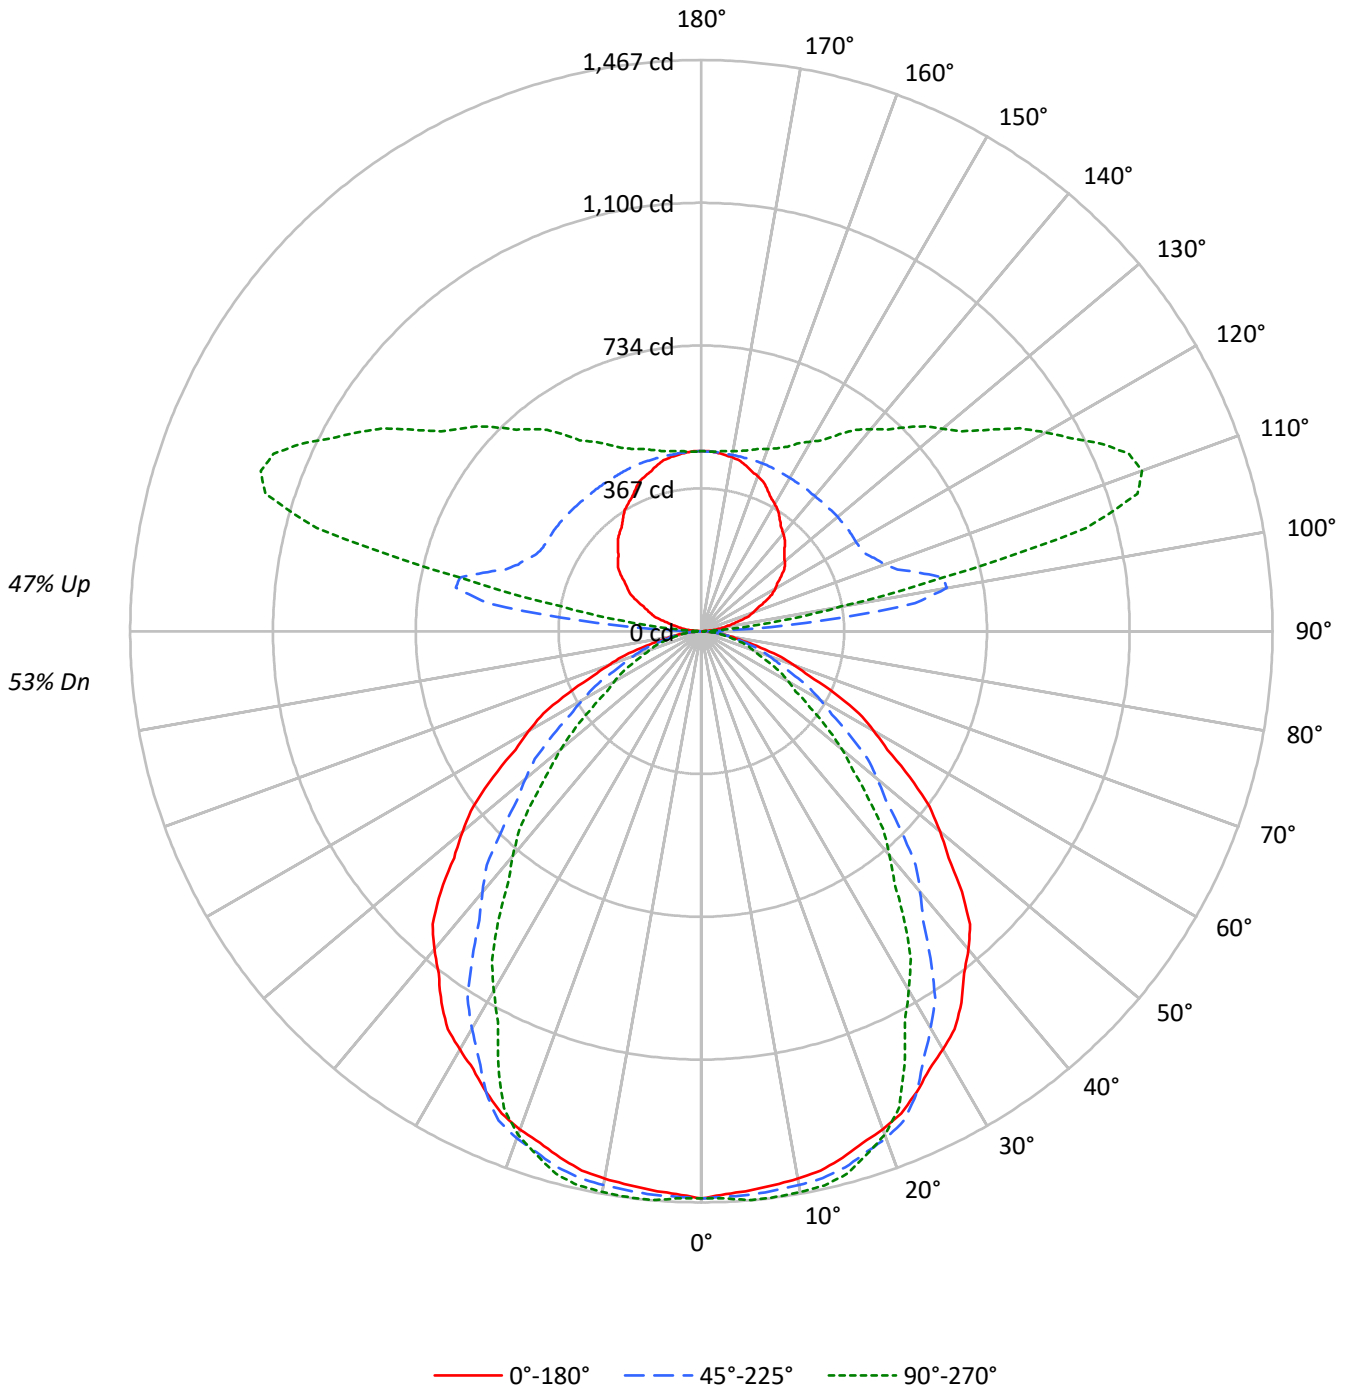



TEST NUMBER: P854271

CATALOG NUMBER: SQ2-PW1-075U-075D-930-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	95	91	88	92	88	85	82	75	73	71	64	62	61	53	52	51	46
2	91	84	78	73	84	78	73	68	67	63	60	57	54	52	47	46	44	39
3	83	74	67	61	77	69	63	58	60	55	51	51	47	44	43	40	38	34
4	76	66	58	52	71	62	55	50	53	48	44	46	42	39	38	36	33	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	26
6	65	53	45	40	60	50	43	38	43	38	34	37	33	30	32	29	26	23
7	60	48	40	35	56	45	38	33	40	34	30	34	30	27	29	26	23	21
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	27	24	21	19
9	52	40	33	28	48	38	31	27	33	28	24	29	25	22	25	22	19	17
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	23521	23521	23521
5°	23365	23545	23770
10°	23407	23681	23976
15°	23402	23841	24120
20°	23411	23816	23649
25°	23284	23309	21975
30°	23126	21962	19867
35°	22945	20209	17940
40°	22489	18423	15850
45°	21607	16568	13844
50°	20110	14812	11848
55°	18396	13084	9607
60°	16488	11380	8289
65°	14418	9807	7370
70°	11788	8710	6680
75°	9177	7530	6145
80°	6834	6453	5421
85°	4631	4891	3075

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21607 cd/sqm



TEST NUMBER: P854271

CATALOG NUMBER: SQ2-PW1-075U-075D-930-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	138.7	2.3
10°-20°	401.9	6.6
20°-30°	591.5	9.7
30°-40°	646.7	10.6
40°-50°	580.2	9.5
50°-60°	432.8	7.1
60°-70°	273.5	4.5
70°-80°	135.5	2.2
80°-90°	32.2	0.5
90°-100°	174.9	2.9
100°-110°	579.7	9.5
110°-120°	575.3	9.4
120°-130°	468.6	7.7
130°-140°	380.8	6.2
140°-150°	295.8	4.9
150°-160°	213.1	3.5
160°-170°	130.5	2.1
170°-180°	44.1	0.7
0°-30°	1132.2	18.6
0°-40°	1778.9	29.2
0°-60°	2791.8	45.8
0°-90°	3233.0	53.0
90°-120°	1329.9	21.8
90°-150°	2475.1	40.6
90°-180°	2863.0	47.0
0°-180°	6095.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1457	1457	1457	1457	1457	
5°	1442	1465	1453	1454	1467	137
15°	1400	1427	1426	1436	1443	395
25°	1307	1336	1308	1254	1234	602
35°	1164	1152	1025	936	910	726
45°	946	870	726	635	606	726
55°	654	591	465	364	341	584
65°	377	346	257	206	193	374
75°	147	158	121	101	98	162
85°	25	32	26	18	17	32
90°	0	1	3	4	4	2
95°	25	74	317	113	76	28
105°	102	144	580	1094	1023	107
115°	181	216	467	972	1137	179
125°	253	281	458	764	901	225
135°	302	333	455	656	740	234
145°	351	378	454	564	618	220
155°	401	415	457	504	523	185
165°	440	445	458	477	482	124
175°	460	460	461	464	463	44
180°	462	462	462	462	462	

TEST NUMBER: P854271

CATALOG NUMBER: SQ2-PW1-075U-075D-930-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1456.8	1456.8	1456.8	1456.8	1456.8
2.5°	1446.9	1465.3	1453.5	1454.7	1458.0
5°	1441.6	1464.6	1452.7	1454.4	1466.6
7.5°	1434.4	1457.7	1448.8	1453.8	1465.7
10°	1427.7	1452.1	1444.4	1451.5	1462.4
12.5°	1418.8	1444.3	1438.8	1447.1	1458.0
15°	1400.0	1427.1	1426.3	1436.2	1443.0
17.5°	1378.0	1405.2	1403.8	1406.4	1409.7
20°	1362.5	1389.6	1386.1	1376.4	1376.4
22.5°	1340.3	1369.6	1360.6	1334.0	1325.3
25°	1307.0	1335.5	1308.4	1253.8	1233.5
27.5°	1268.2	1291.2	1236.8	1159.3	1131.1
30°	1240.4	1258.0	1178.0	1092.7	1065.6
32.5°	1211.5	1218.3	1118.0	1029.4	1000.1
35°	1164.1	1151.9	1025.3	936.0	910.2
37.5°	1108.0	1071.7	936.3	842.7	814.2
40°	1067.0	1015.4	874.1	780.5	752.0
42.5°	1021.5	956.9	815.3	721.6	692.1
45°	946.3	870.3	725.6	634.8	606.3
47.5°	861.6	786.2	641.8	553.9	529.5
50°	800.6	727.3	589.7	501.6	471.7
52.5°	738.4	672.8	538.6	448.1	407.4
55°	653.5	591.1	464.8	364.4	341.3
57.5°	566.1	512.1	397.9	306.8	287.8
60°	510.6	463.1	352.4	275.7	256.7
62.5°	457.3	415.3	308.0	246.9	231.2
65°	377.4	346.2	256.7	206.4	192.9
67.5°	299.7	282.3	213.4	169.3	160.4
70°	249.7	244.3	184.5	148.3	141.5
72.5°	206.5	208.6	156.8	128.4	123.8
75°	147.1	157.9	120.7	101.2	98.5
77.5°	100.2	116.5	89.4	74.9	72.7
80°	73.5	89.8	69.4	58.3	58.3
82.5°	51.3	64.4	49.4	43.8	43.8
85°	25.0	31.8	26.4	18.0	16.6
87.5°	6.7	10.1	5.0	4.1	4.1
90°	0.0	0.9	2.9	3.8	3.8
92.5°	7.7	29.6	87.1	28.2	23.7
95°	24.9	73.6	316.9	113.1	75.6
97.5°	45.8	96.7	553.1	322.6	203.9
100°	60.3	109.0	640.4	550.1	364.7
102.5°	76.4	123.6	635.1	840.6	635.1
105°	101.5	144.5	580.1	1094.5	1023.3
107.5°	127.1	165.5	527.5	1120.3	1174.4
110°	141.7	180.1	500.7	1094.8	1204.3



TEST NUMBER: P854271

CATALOG NUMBER: SQ2-PW1-075U-075D-930-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	157.0	194.6	484.6	1049.5	1189.0
115°	180.9	216.5	467.2	972.5	1137.3
117.5°	204.7	236.3	460.8	899.0	1071.8
120°	219.2	250.1	458.5	852.9	1020.5
122.5°	232.2	262.4	458.5	815.1	969.9
125°	252.7	280.8	458.5	764.2	900.8
127.5°	269.6	297.1	457.4	725.6	842.4
130°	279.5	308.5	456.6	703.1	808.0
132.5°	288.7	318.5	455.9	684.5	778.9
135°	302.5	333.4	454.7	655.7	740.0
137.5°	317.4	347.2	453.6	628.0	702.3
140°	327.4	356.4	452.8	609.4	677.8
142.5°	336.6	364.9	453.6	590.9	651.7
145°	351.3	377.5	453.8	564.1	617.5
147.5°	367.2	389.1	453.9	541.4	581.1
150°	377.2	396.8	454.7	528.2	561.9
152.5°	386.4	405.3	455.5	517.4	544.3
155°	401.1	415.1	456.6	504.0	522.7
157.5°	415.5	426.3	457.8	494.5	507.7
160°	423.1	432.5	458.5	487.5	497.8
162.5°	430.8	437.9	458.5	482.9	490.9
165°	440.4	445.0	458.5	476.8	481.5
167.5°	449.2	451.6	459.5	471.4	473.9
170°	453.8	454.7	459.5	469.1	470.0
172.5°	456.8	457.8	460.3	466.8	467.0
175°	460.5	460.5	461.4	464.3	463.3
177.5°	462.4	462.4	461.6	463.1	461.6
180°	462.4	462.4	462.4	462.4	462.4



TEST NUMBER: P854271

CATALOG NUMBER: SQ2-PW1-075U-075D-930-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.31	19.15	19.25	20.10	21.34	14.79	15.64	15.73	16.59	17.82
	3H	19.63	20.39	20.58	21.34	22.60	16.00	16.76	16.95	17.71	18.97
	4H	20.00	20.72	20.97	21.68	22.94	16.44	17.16	17.41	18.12	19.39
	6H	20.20	20.86	21.18	21.83	23.11	16.76	17.42	17.74	18.39	19.66
	8H	20.24	20.86	21.22	21.85	23.12	16.84	17.46	17.82	18.45	19.72
	12H	20.23	20.83	21.22	21.81	23.10	16.85	17.44	17.83	18.42	19.72
4H	2H	18.41	19.12	19.38	20.09	21.35	15.47	16.19	16.45	17.15	18.42
	3H	19.95	20.55	20.93	21.54	22.82	16.86	17.45	17.84	18.45	19.73
	4H	20.46	21.00	21.45	21.99	23.29	17.41	17.95	18.39	18.94	20.24
	6H	20.79	21.26	21.79	22.27	23.57	17.81	18.28	18.81	19.29	20.59
	8H	20.87	21.30	21.87	22.31	23.62	17.92	18.35	18.92	19.35	20.67
	12H	20.88	21.28	21.90	22.30	23.61	17.94	18.33	18.96	19.35	20.67
8H	4H	20.50	20.93	21.50	21.94	23.25	17.73	18.17	18.73	19.17	20.48
	6H	20.93	21.29	21.96	22.34	23.65	18.24	18.60	19.26	19.64	20.95
	8H	21.08	21.39	22.11	22.43	23.76	18.40	18.72	19.44	19.75	21.08
	12H	21.14	21.42	22.18	22.45	23.82	18.46	18.74	19.50	19.76	21.14
12H	4H	20.46	20.85	21.48	21.87	23.19	17.75	18.14	18.77	19.16	20.48
	6H	20.92	21.24	21.96	22.27	23.60	18.30	18.62	19.34	19.65	20.98
	8H	21.09	21.36	22.12	22.39	23.76	18.49	18.77	19.53	19.79	21.17