

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854286

Luminaire Tested: SQ2-PW1-0U-100D-930-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854286
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-0U-100D-930-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
DIRECT ONLY
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4346.1 lumens
Efficiency: N/A
Efficacy: 115.6 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854286
CATALOG NUMBER: SQ2-PW1-0U-100D-930-UNV-STD-W-4

Luminous Intensity Polar Plot

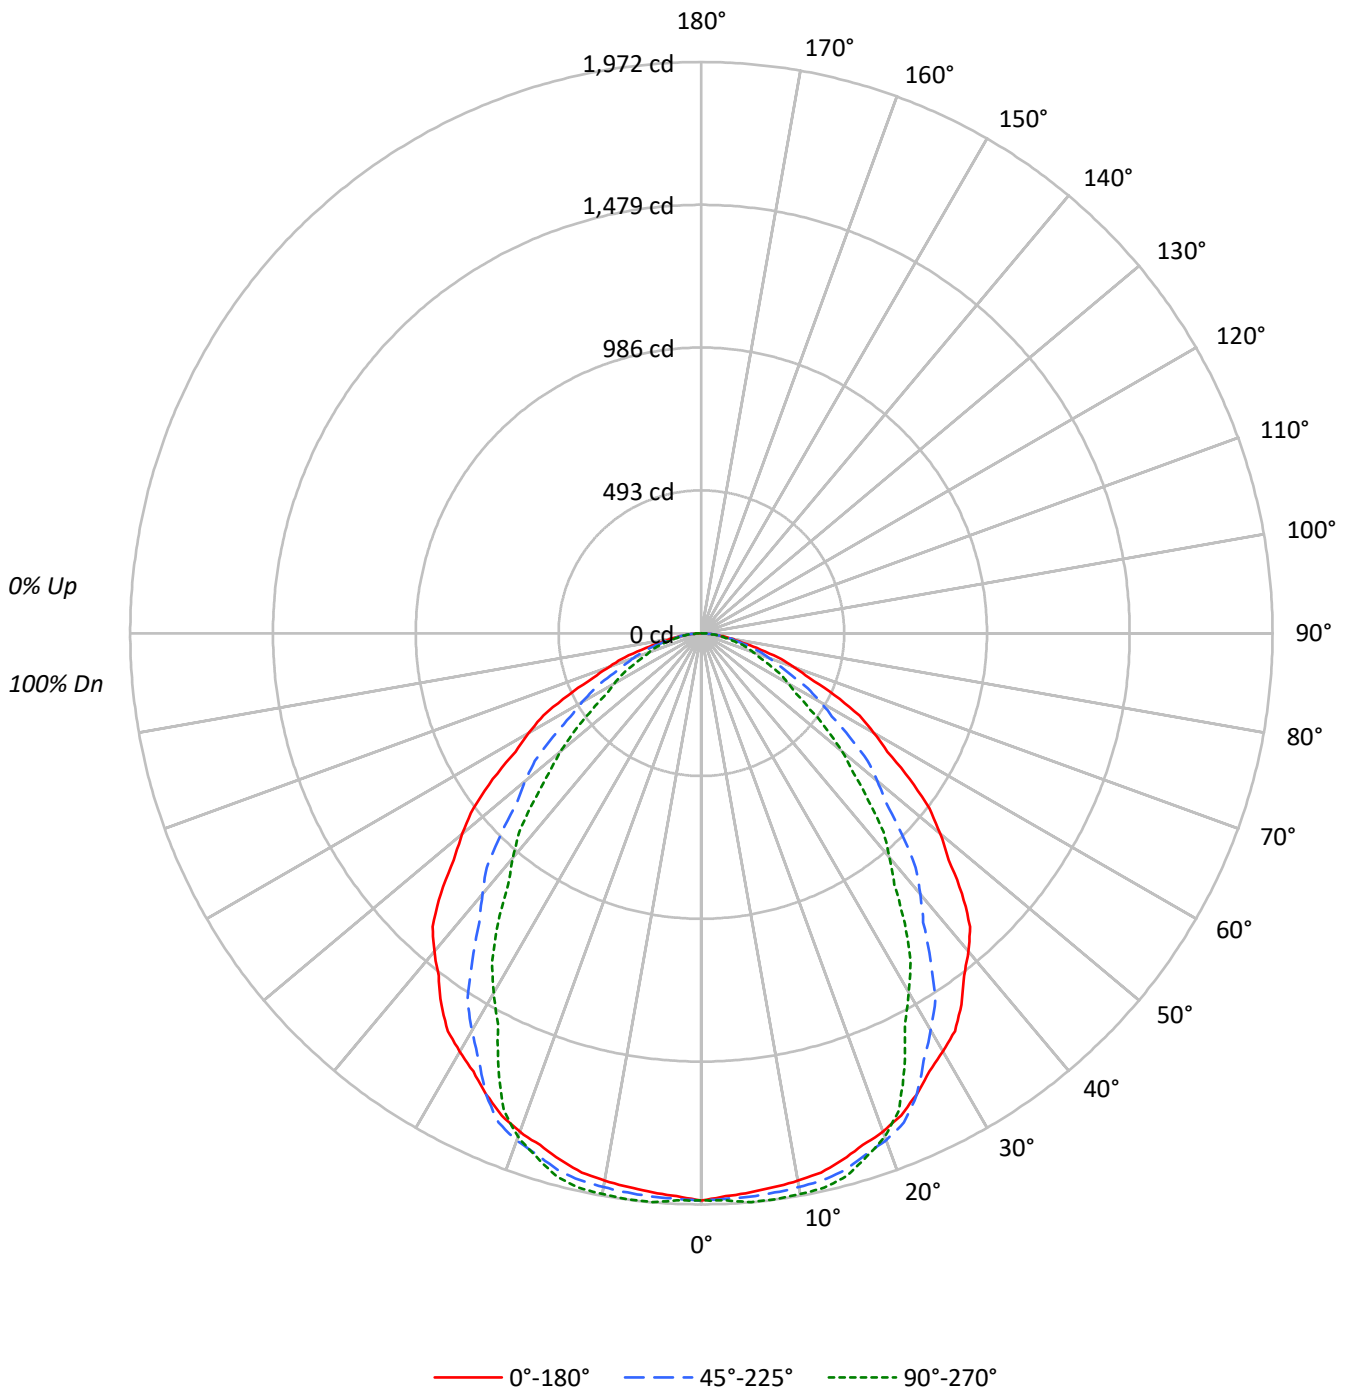



TEST NUMBER: P854286

CATALOG NUMBER: SQ2-PW1-0U-100D-930-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	88	83	99	92	87	82	89	84	80	85	82	78	82	79	76	74				74
3	93	84	76	70	91	82	75	70	79	73	69	77	72	67	74	70	66	64				64
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56				56
5	80	68	59	53	78	67	59	53	65	58	52	63	57	52	61	56	51	49				49
6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	56	50	46	44				44
7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	51	46	41	39				39
8	64	52	44	38	63	51	43	38	50	43	38	48	42	37	47	42	37	35				35
9	60	48	40	35	59	47	40	34	46	39	34	45	39	34	44	38	34	32				32
10	57	44	37	32	55	44	36	31	43	36	31	42	36	31	41	35	31	29				29

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	31625	31625	31625
5°	31413	31657	31958
10°	31472	31839	32236
15°	31463	32055	32430
20°	31476	32020	31797
25°	31306	31338	29544
30°	31092	29528	26711
35°	30849	27173	24122
40°	30237	24770	21311
45°	29051	22277	18614
50°	27038	19914	15933
55°	24732	17591	12918
60°	22168	15300	11144
65°	19385	13184	9906
70°	15852	11712	8984
75°	12333	10125	8259
80°	9196	8675	7280
85°	6224	6558	4150

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 29051 cd/sqm



TEST NUMBER: P854286

CATALOG NUMBER: SQ2-PW1-0U-100D-930-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.5	4.3
10°-20°	540.4	12.4
20°-30°	795.3	18.3
30°-40°	869.5	20.0
40°-50°	780.0	17.9
50°-60°	581.8	13.4
60°-70°	367.7	8.5
70°-80°	182.2	4.2
80°-90°	42.6	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1522.2	35.0
0°-40°	2391.7	55.0
0°-60°	3753.6	86.4
0°-90°	4346.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4346.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1959	1959	1959	1959	1959	
5°	1938	1969	1953	1955	1972	184
15°	1882	1919	1918	1931	1940	531
25°	1757	1796	1759	1686	1658	809
35°	1565	1549	1379	1258	1224	976
45°	1272	1170	976	854	815	976
55°	879	795	625	490	459	785
65°	507	466	345	278	259	503
75°	198	212	162	136	132	218
85°	34	43	35	24	22	44
90°	0	0	0	0	0	



TEST NUMBER: P854286

CATALOG NUMBER: SQ2-PW1-0U-100D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1958.7	1958.7	1958.7	1958.7	1958.7
2.5°	1945.3	1970.1	1954.3	1955.9	1960.2
5°	1938.2	1969.2	1953.2	1955.4	1971.8
7.5°	1928.5	1959.9	1947.9	1954.6	1970.7
10°	1919.6	1952.4	1942.0	1951.6	1966.2
12.5°	1907.6	1941.9	1934.5	1945.6	1960.2
15°	1882.3	1918.7	1917.7	1931.0	1940.1
17.5°	1852.8	1889.3	1887.5	1890.9	1895.3
20°	1831.9	1868.4	1863.6	1850.6	1850.6
22.5°	1802.0	1841.4	1829.3	1793.6	1781.9
25°	1757.3	1795.6	1759.1	1685.8	1658.4
27.5°	1705.0	1736.1	1662.9	1558.7	1520.7
30°	1667.7	1691.4	1583.8	1469.2	1432.7
32.5°	1628.9	1638.1	1503.2	1384.0	1344.6
35°	1565.1	1548.7	1378.6	1258.4	1223.8
37.5°	1489.8	1440.9	1258.8	1133.0	1094.7
40°	1434.6	1365.2	1175.2	1049.4	1011.1
42.5°	1373.4	1286.5	1096.2	970.3	930.5
45°	1272.3	1170.1	975.6	853.5	815.2
47.5°	1158.5	1057.0	863.0	744.7	711.9
50°	1076.4	977.9	792.8	674.4	634.3
52.5°	992.8	904.5	724.2	602.4	547.7
55°	878.6	794.7	624.9	489.9	458.9
57.5°	761.1	688.5	535.0	412.4	386.9
60°	686.5	622.7	473.8	370.6	345.1
62.5°	614.9	558.3	414.1	331.9	310.8
65°	507.4	465.5	345.1	277.5	259.3
67.5°	402.9	379.6	286.9	227.7	215.6
70°	335.8	328.5	248.1	199.4	190.3
72.5°	277.6	280.5	210.8	172.6	166.4
75°	197.7	212.3	162.3	136.1	132.4
77.5°	134.7	156.6	120.1	100.7	97.8
80°	98.9	120.8	93.3	78.3	78.3
82.5°	69.0	86.5	66.4	58.9	58.9
85°	33.6	42.7	35.4	24.2	22.4
87.5°	9.0	13.3	6.0	4.5	4.5
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P854286

CATALOG NUMBER: SQ2-PW1-0U-100D-930-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	22.97	24.47	23.34	24.79	25.10	19.46	20.96	19.82	21.27	21.59
	3H	24.34	25.69	24.72	26.01	26.38	20.71	22.05	21.09	22.38	22.74
	4H	24.74	26.00	25.14	26.35	26.73	21.18	22.44	21.58	22.79	23.17
	6H	24.97	26.14	25.39	26.51	26.90	21.53	22.69	21.94	23.06	23.45
	8H	25.03	26.13	25.45	26.52	26.92	21.62	22.73	22.05	23.12	23.52
	12H	25.04	26.10	25.47	26.48	26.91	21.65	22.71	22.08	23.10	23.53
4H	2H	23.15	24.41	23.55	24.76	25.14	20.21	21.48	20.61	21.82	22.20
	3H	24.75	25.79	25.16	26.19	26.59	21.66	22.70	22.07	23.10	23.50
	4H	25.28	26.22	25.71	26.64	27.07	22.23	23.17	22.66	23.58	24.02
	6H	25.65	26.46	26.10	26.90	27.36	22.66	23.48	23.12	23.92	24.38
	8H	25.73	26.50	26.20	26.94	27.41	22.78	23.54	23.24	23.99	24.45
	12H	25.78	26.46	26.26	26.94	27.41	22.83	23.51	23.31	23.99	24.46
8H	4H	25.36	26.13	25.83	26.57	27.04	22.60	23.36	23.06	23.80	24.27
	6H	25.82	26.45	26.32	26.94	27.42	23.12	23.75	23.62	24.24	24.72
	8H	25.97	26.53	26.48	27.04	27.53	23.29	23.85	23.80	24.36	24.85
	12H	26.06	26.56	26.57	27.05	27.62	23.38	23.88	23.89	24.37	24.93
12H	4H	25.35	26.03	25.83	26.51	26.98	22.64	23.32	23.12	23.80	24.27
	6H	25.81	26.38	26.33	26.89	27.38	23.19	23.76	23.71	24.27	24.75
	8H	26.00	26.50	26.51	26.99	27.56	23.40	23.90	23.91	24.40	24.96