

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854352

Luminaire Tested: SQ2-WBM-075U-050D-930-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854352
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G3-2104-222-5)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-WBM-075U-050D-930-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4985.0 lumens
Efficiency: N/A
Efficacy: 120.4 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.19 / 1.17
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 41.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854352

CATALOG NUMBER: SQ2-WBM-075U-050D-930-UNV-STD-W-4

Luminous Intensity Polar Plot

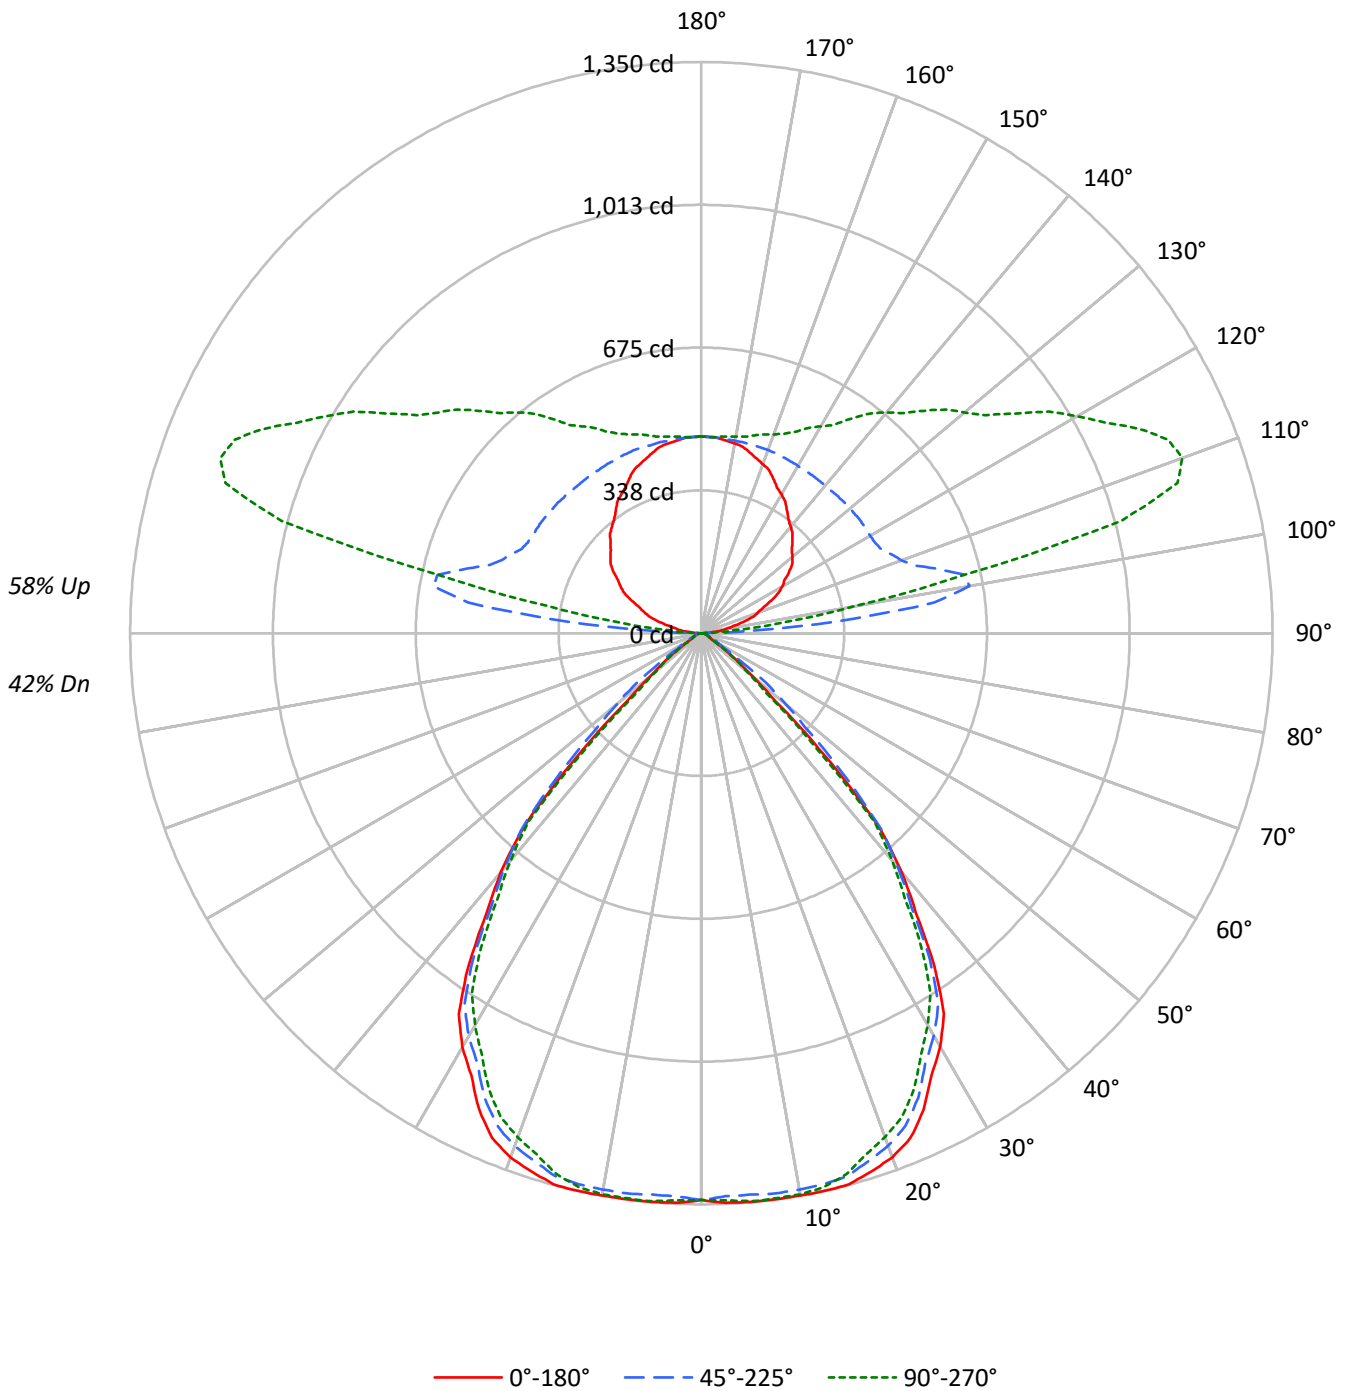



TEST NUMBER: P854352

CATALOG NUMBER: SQ2-WBM-075U-050D-930-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	98	94	91	88	89	86	83	81	71	70	68	58	57	56	46	45	44	39
2	90	84	79	74	82	77	73	69	65	61	59	53	51	49	42	41	40	35
3	83	75	69	64	76	69	64	60	58	55	51	48	46	44	39	37	36	32
4	77	68	61	55	71	63	57	52	53	49	45	44	41	39	36	34	32	29
5	71	61	54	49	65	57	50	46	48	44	40	40	37	35	33	31	29	26
6	66	55	48	43	61	52	45	41	44	39	36	37	34	31	31	28	27	24
7	62	51	43	38	57	47	41	36	40	36	32	34	31	28	28	26	24	22
8	57	46	39	34	53	43	37	33	37	32	29	32	28	26	26	24	22	20
9	54	42	36	31	49	40	34	29	34	30	26	29	26	23	25	22	20	18
10	50	39	33	28	46	37	31	27	32	27	24	27	24	21	23	21	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	21632	21632	21632
5°	21870	21590	21840
10°	22123	21887	22076
15°	22539	22218	22121
20°	22656	22161	21780
25°	22137	21590	21178
30°	21052	20495	19939
35°	18920	18559	17895
40°	15548	15224	14779
45°	9839	11047	8873
50°	3818	6498	3504
55°	1841	2950	1869
60°	869	1460	807
65°	772	844	734
70°	774	774	727
75°	717	780	661
80°	716	716	623
85°	704	704	537

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 11047 cd/sqm



TEST NUMBER: P854352

CATALOG NUMBER: SQ2-WBM-075U-050D-930-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.3	2.6
10°-20°	376.4	7.6
20°-30°	557.4	11.2
30°-40°	577.4	11.6
40°-50°	347.0	7.0
50°-60°	83.0	1.7
60°-70°	22.6	0.5
70°-80°	12.6	0.3
80°-90°	4.5	0.1
90°-100°	175.7	3.5
100°-110°	582.3	11.7
110°-120°	578.0	11.6
120°-130°	470.8	9.4
130°-140°	382.6	7.7
140°-150°	297.1	6.0
150°-160°	214.1	4.3
160°-170°	131.1	2.6
170°-180°	44.3	0.9
0°-30°	1062.1	21.3
0°-40°	1639.5	32.9
0°-60°	2069.5	41.5
0°-90°	2109.1	42.3
90°-120°	1336.0	26.8
90°-150°	2486.4	49.9
90°-180°	2876.0	57.7
0°-180°	4985.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1340	1340	1340	1340	1340	
5°	1349	1345	1332	1349	1348	129
15°	1348	1357	1329	1330	1323	380
25°	1243	1254	1212	1196	1189	568
35°	960	958	942	924	908	590
45°	431	484	484	458	389	329
55°	65	75	105	70	66	67
65°	20	21	22	20	19	21
75°	12	12	12	12	11	13
85°	4	4	4	4	3	4
90°	0	1	3	4	4	1
95°	25	74	318	114	76	29
105°	102	145	583	1100	1028	107
115°	182	218	469	977	1142	180
125°	254	282	461	768	905	226
135°	304	335	457	659	743	235
145°	353	379	456	567	620	221
155°	403	417	459	506	525	186
165°	442	447	461	479	484	125
175°	463	463	464	466	466	44
180°	464	464	464	464	464	

TEST NUMBER: P854352

CATALOG NUMBER: SQ2-WBM-075U-050D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1339.8	1339.8	1339.8	1339.8	1339.8
2.5°	1347.5	1343.0	1332.1	1344.3	1341.3
5°	1349.4	1344.7	1332.1	1349.4	1347.5
7.5°	1349.4	1346.4	1335.7	1350.1	1347.3
10°	1349.4	1349.4	1335.0	1349.3	1346.5
12.5°	1350.2	1353.9	1334.2	1344.7	1340.4
15°	1348.4	1356.9	1329.2	1330.0	1323.4
17.5°	1334.0	1347.2	1309.0	1301.3	1292.3
20°	1318.6	1331.8	1289.8	1275.2	1267.6
22.5°	1291.7	1305.6	1260.5	1246.7	1238.4
25°	1242.6	1253.9	1211.9	1196.3	1188.8
27.5°	1177.6	1182.7	1146.3	1131.7	1123.4
30°	1129.2	1128.2	1099.3	1080.8	1069.5
32.5°	1066.8	1068.1	1041.6	1023.8	1008.7
35°	959.9	958.0	941.6	923.9	907.9
37.5°	832.3	833.7	816.2	797.4	791.2
40°	737.7	740.5	722.3	702.1	701.2
42.5°	622.3	643.2	630.0	608.9	605.0
45°	430.9	483.5	483.8	458.2	388.6
47.5°	239.7	305.5	344.9	272.0	203.3
50°	152.0	195.2	258.7	163.0	139.5
52.5°	108.1	129.5	191.8	116.2	101.8
55°	65.4	74.8	104.8	70.1	66.4
57.5°	40.0	48.3	61.4	47.5	39.6
60°	26.9	34.5	45.2	30.6	25.0
62.5°	23.9	26.1	35.2	24.6	22.7
65°	20.2	21.1	22.1	20.2	19.2
67.5°	17.9	18.8	18.7	17.9	16.9
70°	16.4	17.3	16.4	16.3	15.4
72.5°	14.8	15.0	14.8	14.0	13.8
75°	11.5	12.5	12.5	11.5	10.6
77.5°	9.2	10.0	9.2	9.2	8.3
80°	7.7	7.7	7.7	7.7	6.7
82.5°	6.2	6.2	6.2	6.1	5.2
85°	3.8	3.8	3.8	3.8	2.9
87.5°	1.5	1.7	2.1	1.5	1.5
90°	0.0	0.9	2.9	3.8	3.8
92.5°	7.7	29.7	87.5	28.4	23.8
95°	25.0	73.9	318.3	113.6	76.0
97.5°	46.0	97.1	555.7	324.1	204.8
100°	60.6	109.5	643.4	552.6	366.4
102.5°	76.7	124.1	638.0	844.5	638.0
105°	101.9	145.2	582.8	1099.5	1028.0
107.5°	127.7	166.3	529.9	1125.4	1179.8
110°	142.3	180.9	503.0	1099.8	1209.8



TEST NUMBER: P854352

CATALOG NUMBER: SQ2-WBM-075U-050D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	157.7	195.5	486.8	1054.3	1194.4
115°	181.8	217.5	469.3	977.0	1142.5
117.5°	205.6	237.4	463.0	903.1	1076.7
120°	220.2	251.3	460.6	856.8	1025.1
122.5°	233.3	263.6	460.6	818.8	974.4
125°	253.9	282.1	460.6	767.7	904.9
127.5°	270.8	298.5	459.5	728.9	846.3
130°	280.8	310.0	458.7	706.3	811.7
132.5°	290.0	319.9	458.0	687.6	782.4
135°	303.9	334.9	456.8	658.7	743.4
137.5°	318.9	348.8	455.6	630.8	705.5
140°	328.9	358.0	454.9	612.2	680.9
142.5°	338.1	366.5	455.6	593.6	654.7
145°	352.9	379.3	455.8	566.7	620.3
147.5°	368.9	390.9	456.0	543.9	583.7
150°	378.9	398.6	456.8	530.7	564.5
152.5°	388.1	407.1	457.6	519.7	546.8
155°	402.9	417.0	458.7	506.3	525.1
157.5°	417.4	428.3	459.9	496.7	510.1
160°	425.1	434.5	460.6	489.7	500.1
162.5°	432.8	439.9	460.6	485.1	493.1
165°	442.4	447.1	460.6	479.0	483.7
167.5°	451.2	453.7	461.6	473.6	476.0
170°	455.8	456.8	461.6	471.2	472.2
172.5°	458.9	459.9	462.4	468.9	469.1
175°	462.6	462.6	463.5	466.4	465.5
177.5°	464.5	464.5	463.7	465.2	463.7
180°	464.5	464.5	464.5	464.5	464.5



TEST NUMBER: P854352

CATALOG NUMBER: SQ2-WBM-075U-050D-930-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.81	3.49	3.86	4.53	5.92	2.40	3.09	3.45	4.12	5.51
	3H	3.32	3.93	4.38	4.97	6.38	2.92	3.52	3.97	4.56	5.97
	4H	3.57	4.14	4.64	5.18	6.60	3.15	3.72	4.22	4.77	6.18
	6H	3.77	4.30	4.85	5.35	6.77	3.34	3.86	4.41	4.91	6.34
	8H	3.85	4.34	4.93	5.41	6.83	3.39	3.89	4.47	4.95	6.37
	12H	3.89	4.36	4.98	5.42	6.86	3.41	3.89	4.50	4.94	6.38
4H	2H	2.82	3.39	3.89	4.43	5.85	2.44	3.02	3.52	4.06	5.48
	3H	3.54	4.01	4.62	5.09	6.51	3.17	3.65	4.26	4.72	6.15
	4H	3.93	4.36	5.01	5.42	6.87	3.54	3.97	4.63	5.04	6.49
	6H	4.27	4.64	5.36	5.73	7.17	3.87	4.24	4.96	5.32	6.77
	8H	4.40	4.74	5.49	5.82	7.28	3.98	4.33	5.07	5.40	6.86
	12H	4.49	4.80	5.59	5.89	7.35	4.04	4.35	5.15	5.44	6.90
8H	4H	4.01	4.35	5.10	5.43	6.89	3.66	4.00	4.75	5.08	6.54
	6H	4.48	4.76	5.59	5.88	7.33	4.12	4.40	5.23	5.52	6.97
	8H	4.69	4.93	5.81	6.04	7.51	4.32	4.56	5.44	5.67	7.14
	12H	4.86	5.07	5.98	6.17	7.68	4.46	4.67	5.58	5.77	7.29
12H	4H	3.98	4.29	5.09	5.38	6.84	3.63	3.94	4.74	5.03	6.49
	6H	4.50	4.74	5.62	5.85	7.32	4.15	4.39	5.27	5.50	6.97
	8H	4.73	4.95	5.85	6.05	7.56	4.38	4.59	5.50	5.69	7.21