

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855247

Luminaire Tested: SQ2-FA-150U-050D-835-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855247
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-14, G2-2308-131-11)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FA-150U-050D-835-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8988.4 lumens
Efficiency: N/A
Efficacy: 120.8 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 0.95 / 0.95
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 74.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

Luminous Intensity Polar Plot

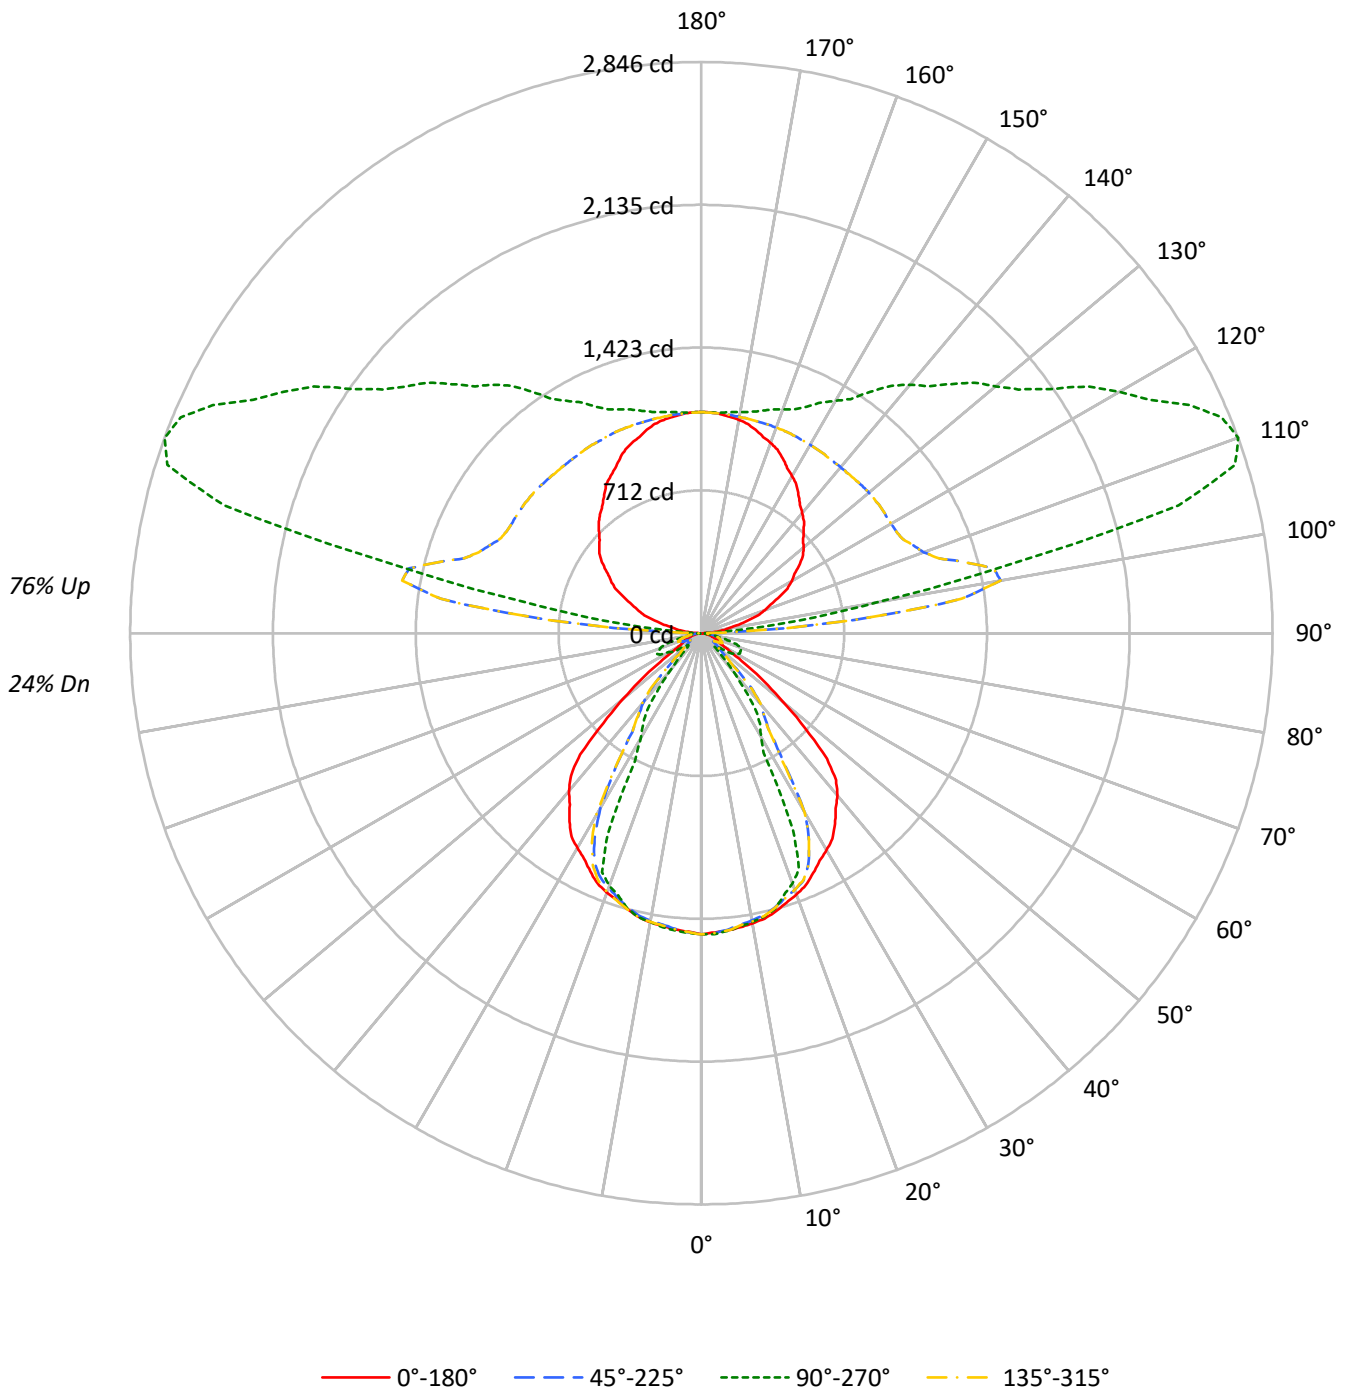



TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	24
1	93	89	85	82	82	79	76	73	61	59	58	45	44	43	30	29	28	22
2	85	78	72	68	75	70	65	61	54	51	49	40	38	36	27	26	25	19
3	78	69	63	57	69	62	56	52	48	45	42	36	34	32	24	23	22	17
4	71	62	54	49	63	55	49	45	44	39	36	33	30	28	22	21	20	15
5	66	55	48	42	59	50	43	39	39	35	31	30	27	24	20	19	18	14
6	61	50	42	37	54	45	38	34	36	31	28	27	24	22	19	17	16	13
7	56	45	38	33	50	41	34	30	32	28	25	25	22	20	18	16	14	12
8	52	41	34	29	47	37	31	27	30	25	22	23	20	18	16	15	13	11
9	49	37	31	26	44	34	28	24	27	23	20	21	18	16	15	13	12	10
10	45	34	28	23	41	31	25	22	25	21	18	20	17	15	14	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	24228	24228	24228	24228
5°	24101	24138	24008	24118
10°	24064	23971	23971	23971
15°	23985	23739	23796	23739
20°	23801	22789	23625	23003
25°	23487	19233	23325	19636
30°	23271	11035	23017	11182
35°	22864	9481	22572	9347
40°	22230	4985	21610	4938
45°	20208	2144	19484	2144
50°	13333	2587	12650	2416
55°	7454	4777	7071	4332
60°	4020	6723	3946	6029
65°	3545	8172	3717	9295
70°	3314	9777	3153	10310
75°	3107	8403	3175	8684
80°	2631	5997	2631	6313
85°	2297	3353	2093	3983

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20208 cd/sqm



TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.2	1.6
10°-20°	400.6	4.5
20°-30°	546.2	6.1
30°-40°	459.0	5.1
40°-50°	260.7	2.9
50°-60°	138.3	1.5
60°-70°	127.4	1.4
70°-80°	93.5	1.0
80°-90°	25.6	0.3
90°-100°	419.5	4.7
100°-110°	1373.7	15.3
110°-120°	1358.1	15.1
120°-130°	1110.2	12.4
130°-140°	906.0	10.1
140°-150°	705.1	7.8
150°-160°	507.7	5.6
160°-170°	310.6	3.5
170°-180°	104.9	1.2
0°-30°	1088.1	12.1
0°-40°	1547.1	17.2
0°-60°	1946.2	21.7
0°-90°	2192.7	24.4
90°-120°	3151.3	35.1
90°-150°	5872.5	65.3
90°-180°	6796.0	75.6
0°-180°	8988.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1501	1501	1501	1501	1501	
5°	1487	1489	1481	1488	1487	141
15°	1435	1420	1424	1420	1435	405
25°	1318	1080	1309	1102	1318	608
35°	1160	481	1145	474	1160	724
45°	885	94	853	94	885	647
55°	265	170	251	154	265	255
65°	93	214	97	243	93	93
75°	50	135	51	139	50	51
85°	12	18	11	22	12	14
90°	1	9	1	9	1	4
95°	59	176	59	176	59	67
105°	239	2461	239	2461	239	252
115°	430	2688	430	2688	430	425
125°	599	2121	599	2121	599	533
135°	721	1755	721	1755	721	558
145°	843	1468	843	1468	843	528
155°	961	1245	961	1245	961	442
165°	1049	1146	1049	1146	1049	296
175°	1096	1103	1096	1103	1096	104
180°	1101	1101	1101	1101	1101	



TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	1500.6	1500.6	1500.6	1500.6	1500.6	1500.6	1500.6	1500.6	1500.6	1500.6	1500.6
2.5°	1492.4	1514.6	1495.2	1492.7	1500.6	1498.8	1496.1	1506.6	1488.8	1506.6	1492.4
5°	1487.0	1512.5	1483.6	1476.0	1489.3	1480.4	1488.1	1503.5	1481.3	1501.3	1479.1
7.5°	1477.7	1500.4	1465.7	1460.9	1473.9	1466.2	1469.4	1490.6	1472.1	1485.1	1465.1
10°	1467.8	1487.7	1453.1	1450.0	1462.1	1454.4	1457.6	1479.9	1462.1	1474.3	1454.2
12.5°	1456.9	1472.4	1437.7	1436.3	1446.7	1441.6	1443.1	1461.8	1447.6	1459.8	1440.6
15°	1434.9	1449.3	1414.6	1409.1	1420.2	1415.8	1418.0	1434.7	1423.6	1431.4	1414.6
17.5°	1407.8	1419.3	1384.7	1368.4	1368.9	1374.4	1384.7	1404.8	1394.9	1405.1	1381.3
20°	1385.2	1398.4	1360.3	1328.6	1326.3	1331.9	1360.3	1380.5	1375.0	1386.1	1352.3
22.5°	1358.9	1367.7	1333.1	1279.6	1272.0	1277.5	1329.5	1353.5	1351.4	1359.0	1317.0
25°	1318.4	1327.2	1264.1	1187.0	1079.6	1180.3	1266.3	1309.3	1309.3	1316.0	1260.7
27.5°	1277.2	1277.4	1163.1	762.3	672.4	734.9	1161.5	1254.8	1265.4	1262.1	1153.4
30°	1248.2	1240.5	1030.9	616.2	591.9	607.4	1032.1	1217.0	1234.6	1222.5	1004.9
32.5°	1214.7	1192.8	761.2	566.5	546.6	560.3	736.0	1172.0	1203.0	1176.6	790.4
35°	1160.0	1102.5	580.5	500.9	481.0	498.6	576.0	1083.3	1145.2	1074.4	599.8
37.5°	1100.9	876.2	511.1	398.9	356.0	390.3	508.6	866.9	1076.9	846.7	510.6
40°	1054.7	688.5	459.5	291.9	236.5	275.2	456.1	656.8	1025.3	706.6	448.1
42.5°	993.1	604.8	368.9	185.4	145.1	169.6	353.8	590.8	961.9	612.2	356.7
45°	885.0	519.8	218.4	101.6	93.9	98.3	201.4	510.3	853.3	499.2	222.9
47.5°	701.0	396.4	140.3	86.5	94.8	86.5	136.0	383.9	662.0	383.2	140.1
50°	530.8	309.4	108.6	87.5	103.0	87.5	105.2	298.9	503.6	326.6	107.5
52.5°	393.1	258.6	88.7	96.0	123.8	97.7	86.2	251.7	373.2	263.5	84.0
55°	264.8	202.8	71.3	126.6	169.7	129.9	71.3	197.0	251.2	194.8	69.0
57.5°	167.9	150.9	72.2	162.7	193.7	165.9	73.3	145.4	161.1	146.1	63.4
60°	124.5	118.9	80.3	172.8	208.2	175.1	81.5	114.5	122.2	113.4	67.9
62.5°	102.8	93.7	96.6	187.2	216.4	182.3	98.7	89.4	106.8	85.6	75.1
65°	92.8	60.7	114.3	189.6	213.9	189.6	115.4	57.5	97.3	61.9	101.8
67.5°	83.7	45.0	110.5	188.2	215.2	188.6	107.7	43.0	80.3	41.9	104.1
70°	70.2	40.3	104.1	191.6	207.1	184.9	104.1	39.2	66.8	38.0	122.2
72.5°	58.4	38.3	96.9	176.9	183.6	170.3	97.8	38.0	58.6	34.3	115.0
75°	49.8	37.6	92.8	141.3	134.7	134.7	90.5	36.6	50.9	34.3	89.4
77.5°	37.3	33.4	77.0	92.2	87.1	87.1	75.6	32.3	35.5	30.2	72.7
80°	28.3	30.6	63.4	67.8	64.5	64.5	61.1	29.4	28.3	28.3	60.0
82.5°	22.0	25.9	48.9	49.8	47.3	46.4	47.5	25.7	22.0	23.8	46.4
85°	12.4	18.0	26.0	21.4	18.1	17.0	24.9	16.9	11.3	16.9	24.9
87.5°	4.8	8.7	5.4	5.2	5.4	5.2	5.4	8.7	4.8	7.8	6.3
90°	1.1	3.4	9.1	7.9	9.1	7.9	9.1	3.4	1.1	3.4	9.1
92.5°	19.2	70.2	215.5	70.0	56.1	70.0	215.5	70.2	19.2	70.2	215.5
95°	58.8	170.5	762.7	271.7	176.5	271.7	762.7	170.5	58.8	170.5	762.7
97.5°	106.8	225.0	1308.5	791.6	490.7	791.6	1308.5	225.0	106.8	225.0	1308.5
100°	140.3	253.2	1514.1	1352.1	896.2	1352.1	1514.1	253.2	140.3	253.2	1514.1
102.5°	178.4	288.6	1491.4	1992.3	1544.4	1992.3	1491.4	288.6	178.4	288.6	1491.4
105°	238.8	340.5	1363.5	2590.6	2461.1	2590.6	1363.5	340.5	238.8	340.5	1363.5
107.5°	298.3	391.7	1238.8	2646.6	2788.9	2646.6	1238.8	391.7	298.3	391.7	1238.8
110°	337.2	428.0	1179.1	2581.4	2845.9	2581.4	1179.1	428.0	337.2	428.0	1179.1



TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	374.4	462.4	1142.9	2468.2	2807.0	2468.2	1142.9	462.4	374.4	462.4	1142.9
115°	430.0	514.1	1107.8	2289.2	2687.5	2289.2	1107.8	514.1	430.0	514.1	1107.8
117.5°	484.1	562.7	1094.4	2113.3	2517.7	2113.3	1094.4	562.7	484.1	562.7	1094.4
120°	519.4	593.6	1090.8	2010.7	2404.6	2010.7	1090.8	593.6	519.4	593.6	1090.8
122.5°	551.1	623.4	1090.8	1922.2	2287.9	1922.2	1090.8	623.4	551.1	623.4	1090.8
125°	598.7	667.2	1091.9	1805.2	2120.6	1805.2	1091.9	667.2	598.7	667.2	1091.9
127.5°	638.9	708.8	1090.6	1719.0	1993.4	1719.0	1090.6	708.8	638.9	708.8	1090.6
130°	664.3	735.0	1089.7	1666.8	1914.7	1666.8	1089.7	735.0	664.3	735.0	1089.7
132.5°	686.9	759.5	1087.0	1621.9	1846.8	1621.9	1087.0	759.5	686.9	759.5	1087.0
135°	720.9	797.1	1082.9	1557.1	1755.1	1557.1	1082.9	797.1	720.9	797.1	1082.9
137.5°	756.6	832.2	1080.4	1489.4	1668.4	1489.4	1080.4	832.2	756.6	832.2	1080.4
140°	781.9	855.0	1079.5	1446.6	1615.9	1446.6	1079.5	855.0	781.9	855.0	1079.5
142.5°	807.2	875.9	1079.5	1401.0	1554.3	1401.0	1079.5	875.9	807.2	875.9	1079.5
145°	843.0	905.0	1080.6	1339.3	1467.7	1339.3	1080.6	905.0	843.0	905.0	1080.6
147.5°	880.5	932.2	1082.2	1285.7	1382.6	1285.7	1082.2	932.2	880.5	932.2	1082.2
150°	904.1	949.5	1084.0	1254.6	1336.4	1254.6	1084.0	949.5	904.1	949.5	1084.0
152.5°	927.6	967.7	1084.9	1228.9	1296.5	1228.9	1084.9	967.7	927.6	967.7	1084.9
155°	960.7	992.8	1087.4	1198.3	1244.7	1198.3	1087.4	992.8	960.7	992.8	1087.4
157.5°	990.3	1013.6	1089.9	1174.2	1207.8	1174.2	1089.9	1013.6	990.3	1013.6	1089.9
160°	1009.3	1028.2	1090.8	1160.5	1187.0	1160.5	1090.8	1028.2	1009.3	1028.2	1090.8
162.5°	1025.6	1040.9	1090.8	1149.4	1168.9	1149.4	1090.8	1040.9	1025.6	1040.9	1090.8
165°	1048.9	1058.9	1091.9	1134.2	1146.3	1134.2	1091.9	1058.9	1048.9	1058.9	1091.9
167.5°	1068.6	1073.5	1093.3	1122.3	1128.8	1122.3	1093.3	1073.5	1068.6	1073.5	1093.3
170°	1079.5	1081.8	1094.2	1115.8	1118.0	1115.8	1094.2	1081.8	1079.5	1081.8	1094.2
172.5°	1087.6	1089.0	1096.9	1111.2	1111.6	1111.2	1096.9	1089.0	1087.6	1089.0	1096.9
175°	1096.5	1096.5	1097.6	1105.5	1103.3	1105.5	1097.6	1096.5	1096.5	1096.5	1097.6
177.5°	1101.0	1100.1	1099.2	1104.6	1101.0	1104.6	1099.2	1100.1	1101.0	1100.1	1099.2
180°	1101.0	1101.0	1101.0	1101.0	1101.0	1101.0	1101.0	1101.0	1101.0	1101.0	1101.0



TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	1500.6	1500.6	1500.6	1500.6	1500.6	1500.6
2.5°	1488.9	1495.2	1495.2	1491.5	1509.3	1492.4
5°	1473.8	1488.1	1481.5	1481.3	1503.6	1487.0
7.5°	1463.1	1476.6	1470.4	1469.1	1491.0	1477.7
10°	1452.2	1462.1	1457.7	1461.0	1481.0	1467.8
12.5°	1436.8	1448.5	1444.1	1449.2	1467.5	1456.9
15°	1410.3	1420.2	1422.5	1424.8	1446.0	1434.9
17.5°	1366.5	1371.4	1382.4	1398.1	1420.2	1407.8
20°	1332.1	1338.8	1345.4	1372.7	1398.4	1385.2
22.5°	1293.0	1290.8	1306.3	1338.3	1370.4	1358.9
25°	1187.5	1102.2	1196.3	1278.8	1321.7	1318.4
27.5°	826.8	717.5	814.2	1180.3	1270.5	1277.2
30°	650.7	599.8	649.6	1053.6	1232.7	1248.2
32.5°	577.7	542.7	573.1	801.9	1185.1	1214.7
35°	498.5	474.2	498.5	599.8	1091.4	1160.0
37.5°	399.0	349.2	398.1	518.3	882.2	1100.9
40°	297.3	234.3	288.5	464.0	705.0	1054.7
42.5°	198.2	151.0	187.5	365.3	609.9	993.1
45°	107.2	93.9	102.8	220.7	497.7	885.0
47.5°	84.1	88.9	84.1	139.2	380.7	701.0
50°	80.7	96.2	80.7	107.5	314.9	530.8
52.5°	87.9	104.3	87.0	84.9	257.0	393.1
55°	99.7	153.9	100.8	69.0	188.4	264.8
57.5°	141.9	173.1	143.5	65.4	145.2	167.9
60°	145.8	186.7	144.6	69.0	112.3	124.5
62.5°	172.5	231.1	172.2	79.0	83.5	102.8
65°	221.1	243.3	223.4	100.7	59.6	92.8
67.5°	209.9	225.7	207.8	108.0	41.1	83.7
70°	206.2	218.4	204.0	123.4	38.0	70.2
72.5°	192.4	194.0	188.4	114.3	34.3	58.4
75°	149.2	139.2	143.6	98.5	34.3	49.8
77.5°	92.7	88.7	89.4	75.1	30.2	37.3
80°	70.2	67.9	66.8	63.4	28.3	28.3
82.5°	52.1	49.8	48.7	48.9	23.8	22.0
85°	23.8	21.5	20.4	28.3	16.9	12.4
87.5°	6.1	6.3	5.2	6.3	7.0	4.8
90°	7.9	9.1	7.9	9.1	3.4	1.1
92.5°	70.0	56.1	70.0	215.5	70.2	19.2
95°	271.7	176.5	271.7	762.7	170.5	58.8
97.5°	791.6	490.7	791.6	1308.5	225.0	106.8
100°	1352.1	896.2	1352.1	1514.1	253.2	140.3
102.5°	1992.3	1544.4	1992.3	1491.4	288.6	178.4
105°	2590.6	2461.1	2590.6	1363.5	340.5	238.8
107.5°	2646.6	2788.9	2646.6	1238.8	391.7	298.3
110°	2581.4	2845.9	2581.4	1179.1	428.0	337.2



TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	2468.2	2807.0	2468.2	1142.9	462.4	374.4
115°	2289.2	2687.5	2289.2	1107.8	514.1	430.0
117.5°	2113.3	2517.7	2113.3	1094.4	562.7	484.1
120°	2010.7	2404.6	2010.7	1090.8	593.6	519.4
122.5°	1922.2	2287.9	1922.2	1090.8	623.4	551.1
125°	1805.2	2120.6	1805.2	1091.9	667.2	598.7
127.5°	1719.0	1993.4	1719.0	1090.6	708.8	638.9
130°	1666.8	1914.7	1666.8	1089.7	735.0	664.3
132.5°	1621.9	1846.8	1621.9	1087.0	759.5	686.9
135°	1557.1	1755.1	1557.1	1082.9	797.1	720.9
137.5°	1489.4	1668.4	1489.4	1080.4	832.2	756.6
140°	1446.6	1615.9	1446.6	1079.5	855.0	781.9
142.5°	1401.0	1554.3	1401.0	1079.5	875.9	807.2
145°	1339.3	1467.7	1339.3	1080.6	905.0	843.0
147.5°	1285.7	1382.6	1285.7	1082.2	932.2	880.5
150°	1254.6	1336.4	1254.6	1084.0	949.5	904.1
152.5°	1228.9	1296.5	1228.9	1084.9	967.7	927.6
155°	1198.3	1244.7	1198.3	1087.4	992.8	960.7
157.5°	1174.2	1207.8	1174.2	1089.9	1013.6	990.3
160°	1160.5	1187.0	1160.5	1090.8	1028.2	1009.3
162.5°	1149.4	1168.9	1149.4	1090.8	1040.9	1025.6
165°	1134.2	1146.3	1134.2	1091.9	1058.9	1048.9
167.5°	1122.3	1128.8	1122.3	1093.3	1073.5	1068.6
170°	1115.8	1118.0	1115.8	1094.2	1081.8	1079.5
172.5°	1111.2	1111.6	1111.2	1096.9	1089.0	1087.6
175°	1105.5	1103.3	1105.5	1097.6	1096.5	1096.5
177.5°	1104.6	1101.0	1104.6	1099.2	1100.1	1101.0
180°	1101.0	1101.0	1101.0	1101.0	1101.0	1101.0



TEST NUMBER: P855247

CATALOG NUMBER: SQ2-FA-150U-050D-835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.87	8.50	9.04	9.64	11.24	6.73	7.36	7.89	8.50	10.10
	3H	8.56	9.13	9.73	10.27	11.89	12.87	13.43	14.04	14.58	16.20
	4H	8.97	9.50	10.14	10.65	12.27	14.14	14.67	15.32	15.82	17.44
	6H	9.31	9.80	10.50	10.95	12.58	14.74	15.23	15.92	16.38	18.01
	8H	9.42	9.89	10.61	11.06	12.68	14.86	15.32	16.04	16.49	18.11
	12H	9.49	9.93	10.68	11.09	12.73	14.89	15.33	16.08	16.49	18.14
4H	2H	8.25	8.78	9.44	9.93	11.55	7.24	7.78	8.43	8.93	10.55
	3H	9.24	9.68	10.42	10.85	12.48	13.56	14.00	14.75	15.18	16.81
	4H	9.79	10.20	10.98	11.36	13.01	15.00	15.41	16.19	16.58	18.22
	6H	10.26	10.61	11.45	11.79	13.43	15.73	16.08	16.92	17.27	18.91
	8H	10.43	10.76	11.62	11.93	13.59	15.90	16.22	17.09	17.40	19.05
	12H	10.53	10.83	11.74	12.02	13.68	15.95	16.25	17.16	17.43	19.09
8H	4H	10.88	11.21	12.07	12.38	14.04	15.12	15.44	16.31	16.62	18.27
	6H	11.49	11.75	12.70	12.97	14.62	15.99	16.26	17.20	17.48	19.13
	8H	11.72	11.96	12.94	13.15	14.82	16.24	16.48	17.46	17.67	19.34
	12H	11.88	12.09	13.10	13.28	14.99	16.35	16.56	17.57	17.75	19.46
12H	4H	11.02	11.31	12.22	12.50	14.16	15.07	15.36	16.27	16.55	18.21
	6H	11.76	12.00	12.98	13.19	14.86	16.00	16.23	17.22	17.43	19.10
	8H	12.05	12.26	13.27	13.45	15.15	16.27	16.48	17.49	17.67	19.37