

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855237

Luminaire Tested: SQ2-FB-075U-050D-835-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855237
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FB-075U-050D-835-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5710.3 lumens
Efficiency: N/A
Efficacy: 138.9 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.56
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 41.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855237

CATALOG NUMBER: SQ2-FB-075U-050D-835-UNV-STD-W-4

Luminous Intensity Polar Plot

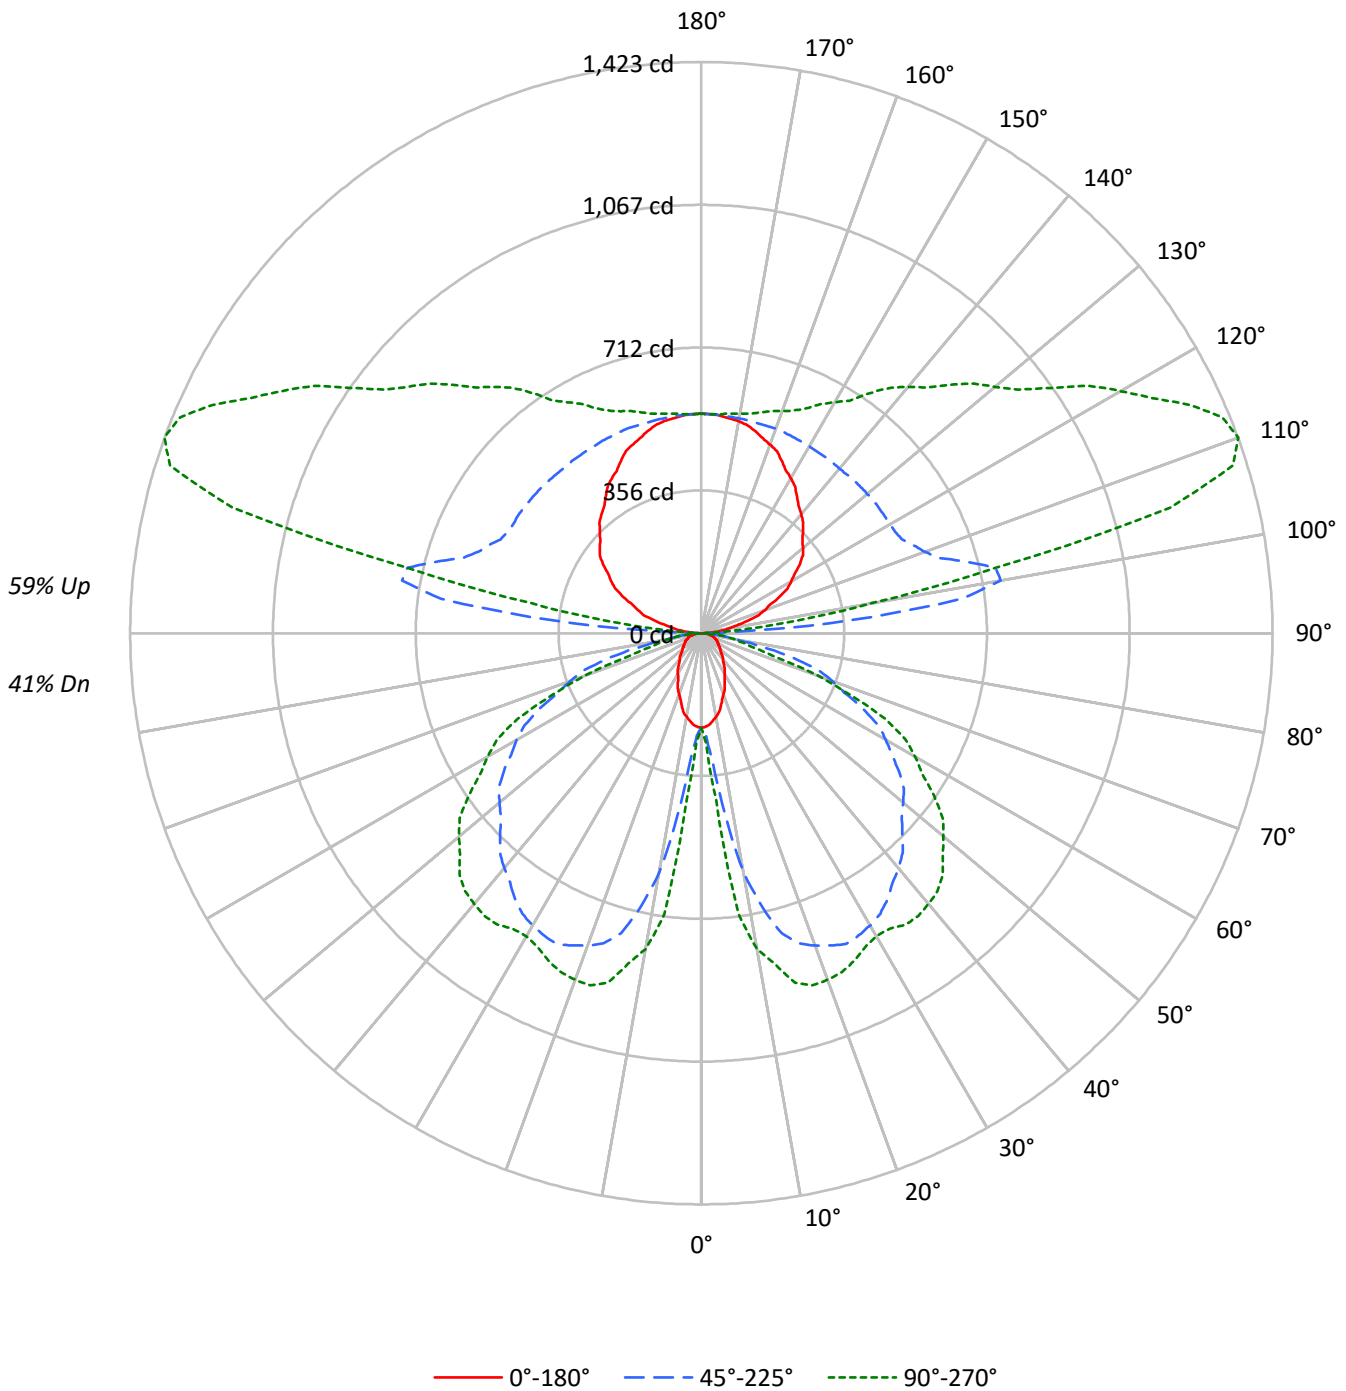



TEST NUMBER: P855237

CATALOG NUMBER: SQ2-FB-075U-050D-835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41
1	96	91	87	84	87	83	80	77	68	66	64	55	53	52	42	41	40	34
2	87	79	73	68	79	72	67	63	59	56	52	47	45	43	36	35	33	28
3	79	69	62	56	71	63	57	52	52	47	43	42	38	35	32	30	28	23
4	72	61	53	47	65	56	49	43	46	41	37	37	33	30	28	26	23	20
5	66	54	46	40	59	49	42	37	41	35	31	33	29	26	25	22	20	17
6	60	48	40	34	55	44	37	32	36	31	27	29	25	22	23	20	17	14
7	56	43	35	30	50	40	33	27	33	27	23	26	22	19	20	17	15	12
8	51	39	31	26	47	36	29	24	30	24	20	24	20	17	19	16	13	11
9	48	35	28	23	43	33	26	21	27	22	18	22	18	15	17	14	12	10
10	44	32	25	20	40	30	23	19	25	20	16	20	16	13	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3801	3801	3801
5°	3705	5136	6731
10°	3469	9945	13100
15°	3141	12939	15076
20°	2780	14234	15789
25°	2460	15221	16048
30°	2174	15676	16246
35°	1941	15948	17465
40°	1764	16101	18556
45°	1628	16175	19431
50°	1535	16488	19783
55°	1498	16915	19941
60°	1534	17140	19843
65°	1601	16905	19282
70°	1657	16348	14582
75°	1834	14685	8047
80°	1897	7578	7466
85°	1890	5243	3149

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 52.5°
 Luminance: 20123 cd/sqm



TEST NUMBER: P855237

CATALOG NUMBER: SQ2-FB-075U-050D-835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.4	0.7
10°-20°	180.0	3.2
20°-30°	316.7	5.5
30°-40°	410.0	7.2
40°-50°	452.1	7.9
50°-60°	422.2	7.4
60°-70°	326.3	5.7
70°-80°	150.5	2.6
80°-90°	29.3	0.5
90°-100°	206.7	3.6
100°-110°	685.2	12.0
110°-120°	680.0	11.9
120°-130°	553.9	9.7
130°-140°	450.2	7.9
140°-150°	349.6	6.1
150°-160°	251.9	4.4
160°-170°	154.3	2.7
170°-180°	52.1	0.9
0°-30°	536.2	9.4
0°-40°	946.1	16.6
0°-60°	1820.4	31.9
0°-90°	2326.5	40.7
90°-120°	1571.9	27.5
90°-150°	2925.6	51.2
90°-180°	3384.0	59.3
0°-180°	5710.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	235	235	235	235	235	
5°	229	262	317	387	415	21
15°	188	370	774	866	902	52
25°	138	498	854	892	901	63
35°	98	480	809	837	886	62
45°	71	368	708	813	851	55
55°	53	219	601	691	708	48
65°	42	124	442	496	505	41
75°	29	76	235	127	129	30
85°	10	22	28	19	17	11
90°	0	1	3	4	4	2
95°	29	87	375	134	89	34
105°	120	171	686	1294	1210	127
115°	214	256	552	1150	1344	211
125°	299	332	542	903	1065	266
135°	358	394	537	775	875	277
145°	415	446	536	667	730	261
155°	474	491	540	596	618	218
165°	520	526	542	564	569	147
175°	544	544	545	549	548	52
180°	546	546	546	546	546	

TEST NUMBER: P855237

CATALOG NUMBER: SQ2-FB-075U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	235.4	235.4	235.4	235.4	235.4
2.5°	233.6	243.3	254.4	267.2	272.5
5°	228.6	261.8	316.9	386.6	415.3
7.5°	219.8	287.2	460.8	647.3	704.8
10°	211.6	305.7	606.6	767.9	799.0
12.5°	202.6	330.2	698.0	811.4	843.3
15°	187.9	370.4	774.1	866.5	901.9
17.5°	172.7	415.7	809.4	900.6	919.8
20°	161.8	447.3	828.4	906.8	918.9
22.5°	151.9	471.0	842.0	901.4	914.4
25°	138.1	497.7	854.4	892.0	900.8
27.5°	124.7	504.7	849.0	873.6	882.2
30°	116.6	502.7	840.8	859.3	871.4
32.5°	109.3	497.3	829.1	846.8	873.2
35°	98.5	480.2	809.1	837.4	886.1
37.5°	89.2	452.8	782.9	840.7	887.7
40°	83.7	432.3	763.9	840.6	880.4
42.5°	78.3	408.3	742.1	831.5	871.4
45°	71.3	367.8	708.4	813.4	851.0
47.5°	64.7	322.3	677.2	788.3	815.7
50°	61.1	291.3	656.4	765.5	787.6
52.5°	57.5	261.1	635.5	738.3	758.7
55°	53.2	219.2	600.9	690.8	708.4
57.5°	49.3	183.2	561.5	638.1	652.5
60°	47.5	163.8	530.8	600.1	614.5
62.5°	44.8	146.0	496.3	560.3	573.8
65°	41.9	123.8	442.5	495.9	504.7
67.5°	37.8	107.3	385.2	417.9	401.3
70°	35.1	99.2	346.3	356.5	308.9
72.5°	33.3	90.4	303.7	276.8	186.7
75°	29.4	75.9	235.4	126.7	129.0
77.5°	24.0	58.7	154.8	97.3	99.4
80°	20.4	48.0	81.5	79.2	80.3
82.5°	16.7	37.3	56.1	58.4	56.8
85°	10.2	22.4	28.3	19.2	17.0
87.5°	3.6	8.3	5.2	5.4	5.4
90°	0.0	1.1	3.4	4.5	4.5
92.5°	9.1	35.0	103.0	33.4	28.1
95°	29.4	86.9	374.6	133.6	89.4
97.5°	54.1	114.3	653.8	381.3	241.0
100°	71.3	128.8	757.0	650.1	431.2
102.5°	90.3	146.1	750.6	993.6	750.6
105°	120.0	170.9	685.7	1293.7	1209.6
107.5°	150.3	195.7	623.4	1324.2	1388.1
110°	167.5	212.9	591.7	1294.1	1423.4



TEST NUMBER: P855237

CATALOG NUMBER: SQ2-FB-075U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	185.6	230.1	572.7	1240.5	1405.3
115°	213.9	255.9	552.1	1149.5	1344.3
117.5°	241.9	279.3	544.7	1062.6	1266.9
120°	259.2	295.6	542.0	1008.2	1206.2
122.5°	274.5	310.2	542.0	963.5	1146.5
125°	298.8	331.9	542.0	903.2	1064.8
127.5°	318.7	351.2	540.6	857.7	995.8
130°	330.4	364.7	539.7	831.1	955.0
132.5°	341.3	376.5	538.8	809.1	920.6
135°	357.6	394.0	537.4	775.1	874.7
137.5°	375.3	410.3	536.1	742.3	830.1
140°	387.0	421.3	535.2	720.3	801.1
142.5°	397.9	431.3	536.1	698.5	770.3
145°	415.3	446.2	536.3	666.8	729.8
147.5°	434.1	459.9	536.5	640.0	686.8
150°	445.9	469.1	537.4	624.3	664.2
152.5°	456.6	479.0	538.3	611.6	643.4
155°	474.1	490.7	539.7	595.7	617.8
157.5°	491.0	503.9	541.0	584.5	600.1
160°	500.1	511.2	542.0	576.2	588.4
162.5°	509.1	517.6	542.0	570.7	580.2
165°	520.5	526.0	542.0	563.6	569.1
167.5°	530.9	533.8	543.1	557.2	560.1
170°	536.3	537.4	543.1	554.5	555.5
172.5°	539.9	541.0	544.0	551.7	551.9
175°	544.2	544.2	545.3	548.7	547.6
177.5°	546.5	546.5	545.6	547.4	545.6
180°	546.5	546.5	546.5	546.5	546.5



TEST NUMBER: P855237

CATALOG NUMBER: SQ2-FB-075U-050D-835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.79	11.59	11.82	12.63	14.03	19.53	20.33	20.55	21.37	22.76
	3H	11.52	12.24	12.55	13.28	14.70	21.14	21.86	22.18	22.91	24.33
	4H	11.81	12.50	12.86	13.55	14.97	21.32	22.00	22.37	23.05	24.48
	6H	12.03	12.66	13.09	13.71	15.14	21.40	22.03	22.46	23.09	24.52
	8H	12.08	12.68	13.15	13.75	15.18	21.41	22.01	22.47	23.08	24.51
	12H	12.11	12.68	13.18	13.74	15.20	21.38	21.94	22.45	23.01	24.46
4H	2H	15.18	15.86	16.24	16.91	18.34	19.96	20.65	21.02	21.69	23.12
	3H	16.11	16.68	17.17	17.76	19.19	21.78	22.35	22.85	23.43	24.86
	4H	16.39	16.91	17.46	17.98	19.44	22.02	22.54	23.09	23.61	25.06
	6H	16.52	16.96	17.60	18.06	19.51	22.16	22.61	23.24	23.70	25.15
	8H	16.54	16.95	17.62	18.04	19.51	22.18	22.60	23.26	23.68	25.15
	12H	16.53	16.90	17.63	18.00	19.47	22.15	22.53	23.25	23.63	25.10
8H	4H	17.56	17.98	18.64	19.06	20.53	22.13	22.55	23.21	23.63	25.10
	6H	17.79	18.14	18.90	19.26	20.73	22.33	22.68	23.44	23.80	25.27
	8H	17.86	18.17	18.98	19.27	20.76	22.39	22.69	23.50	23.80	25.29
	12H	17.89	18.15	19.00	19.26	20.78	22.38	22.65	23.50	23.75	25.27
12H	4H	17.57	17.95	18.67	19.05	20.52	22.08	22.46	23.18	23.55	25.03
	6H	17.89	18.19	19.00	19.30	20.78	22.31	22.62	23.43	23.72	25.21
	8H	17.99	18.25	19.10	19.36	20.88	22.38	22.64	23.49	23.75	25.27