

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855190

Luminaire Tested: SQ2-FB-0U-100D-835-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P855190  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-12)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-FB-0U-100D-835-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4511.3 lumens  
Efficiency: N/A  
Efficacy: 120.0 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.56  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 37.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P855190  
CATALOG NUMBER: SQ2-FB-0U-100D-835-UNV-STD-W-4

### Luminous Intensity Polar Plot

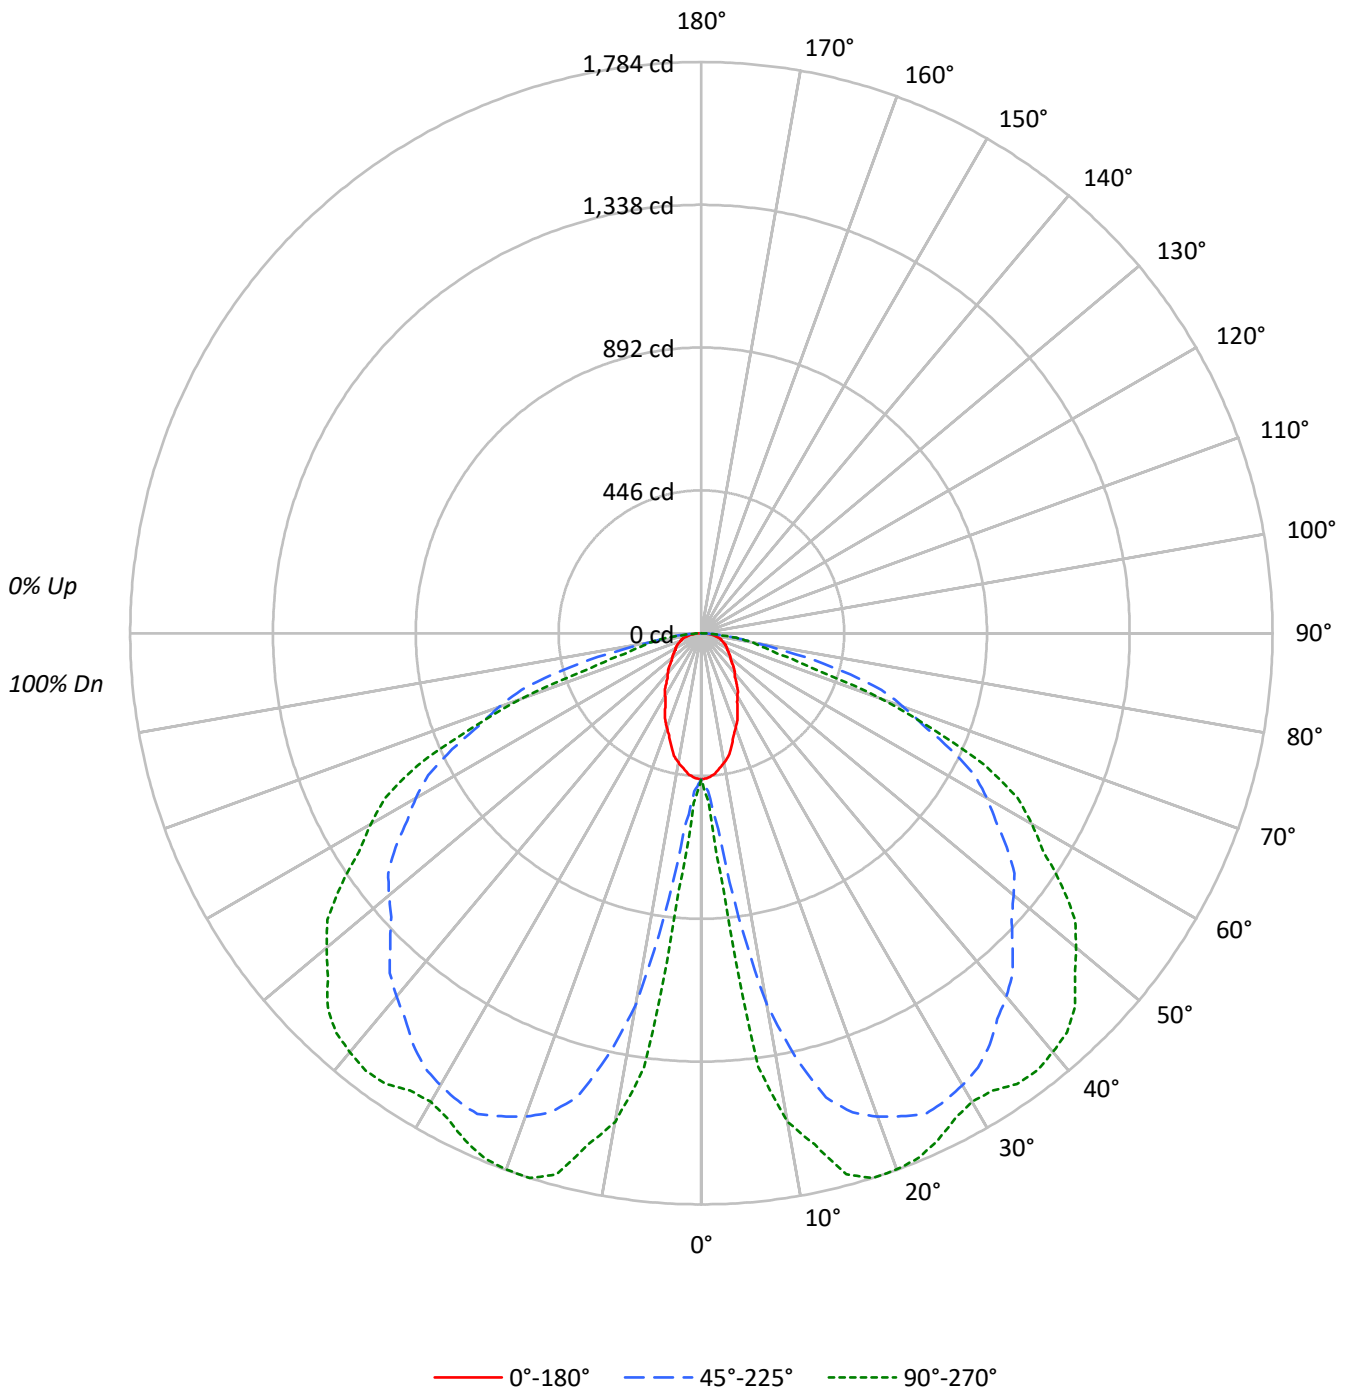



TEST NUMBER: P855190

CATALOG NUMBER: SQ2-FB-0U-100D-835-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84				
2	98	90	83	77	96	88	82	76	84	79	74	81	77	73	78	74	71	69				
3	89	78	70	63	87	77	69	63	74	67	61	71	65	60	68	63	59	57				
4	81	69	60	53	79	67	59	52	65	57	52	63	56	51	60	55	50	48				
5	74	61	52	45	72	60	51	45	58	50	44	56	49	43	54	48	43	41				
6	68	54	45	39	66	53	45	38	52	44	38	50	43	38	48	42	37	35				
7	63	49	40	34	61	48	40	33	47	39	33	45	38	33	44	37	33	31				
8	58	44	36	30	57	44	35	29	42	35	29	41	34	29	40	34	29	27				
9	54	40	32	26	53	40	32	26	39	31	26	38	31	26	37	30	26	24				
10	51	37	29	23	49	37	29	23	36	28	23	35	28	23	34	28	23	21				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7371	7371	7371
5°	7186	9961	13055
10°	6730	19289	25406
15°	6091	25097	29240
20°	5393	27606	30624
25°	4771	29523	31126
30°	4215	30404	31510
35°	3763	30934	33876
40°	3423	31228	35993
45°	3158	31376	37689
50°	2977	31976	38371
55°	2905	32808	38680
60°	2977	33244	38488
65°	3106	32791	37398
70°	3210	31704	28287
75°	3556	28478	15608
80°	3673	14691	14486
85°	3668	10170	6095

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 52.5°  
 Luminance: 39028 cd/sqm



TEST NUMBER: P855190

CATALOG NUMBER: SQ2-FB-0U-100D-835-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	76.5	1.7
10°-20°	349.1	7.7
20°-30°	614.3	13.6
30°-40°	795.1	17.6
40°-50°	877.0	19.4
50°-60°	818.8	18.2
60°-70°	632.8	14.0
70°-80°	291.9	6.5
80°-90°	55.7	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1039.9	23.1
0°-40°	1835.1	40.7
0°-60°	3530.8	78.3
0°-90°	4511.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4511.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	456	456	456	456	456	
5°	443	508	615	750	806	41
15°	364	718	1501	1681	1749	102
25°	268	965	1657	1730	1747	123
35°	191	931	1569	1624	1719	120
45°	138	713	1374	1578	1651	107
55°	103	425	1166	1340	1374	93
65°	81	240	858	962	979	80
75°	57	147	456	246	250	59
85°	20	43	55	37	33	22
90°	0	0	0	0	0	



TEST NUMBER: P855190

CATALOG NUMBER: SQ2-FB-0U-100D-835-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	456.5	456.5	456.5	456.5	456.5
2.5°	453.0	471.9	493.4	518.2	528.5
5°	443.4	507.8	614.6	749.7	805.5
7.5°	426.3	557.1	893.8	1255.4	1367.0
10°	410.5	592.9	1176.5	1489.5	1549.6
12.5°	392.9	640.5	1353.8	1573.8	1635.7
15°	364.4	718.5	1501.4	1680.6	1749.3
17.5°	335.0	806.2	1569.8	1746.7	1784.1
20°	313.9	867.5	1606.7	1758.7	1782.3
22.5°	294.6	913.5	1633.0	1748.2	1773.5
25°	267.8	965.3	1657.2	1730.0	1747.2
27.5°	241.8	978.9	1646.7	1694.4	1711.2
30°	226.1	975.0	1630.8	1666.5	1690.1
32.5°	212.1	964.5	1608.0	1642.5	1693.6
35°	190.9	931.4	1569.4	1624.2	1718.7
37.5°	172.9	878.2	1518.5	1630.7	1721.7
40°	162.4	838.4	1481.6	1630.4	1707.7
42.5°	151.9	791.8	1439.5	1612.8	1690.1
45°	138.3	713.4	1374.1	1577.7	1650.6
47.5°	125.5	625.1	1313.4	1528.9	1582.1
50°	118.5	564.9	1273.0	1484.7	1527.6
52.5°	111.5	506.4	1232.7	1432.0	1471.5
55°	103.2	425.1	1165.5	1339.7	1374.1
57.5°	95.7	355.3	1089.1	1237.7	1265.7
60°	92.2	317.5	1029.5	1163.9	1191.9
62.5°	86.9	283.0	962.7	1086.6	1112.9
65°	81.3	240.0	858.3	961.8	978.9
67.5°	73.3	208.1	747.1	810.5	778.4
70°	68.0	192.5	671.6	691.4	599.2
72.5°	64.5	175.3	589.1	536.9	362.1
75°	57.0	147.2	456.5	245.9	250.2
77.5°	46.5	114.0	300.2	188.9	192.7
80°	39.5	93.1	158.0	153.7	155.8
82.5°	32.5	72.4	108.9	113.2	110.2
85°	19.8	43.3	54.9	37.2	32.9
87.5°	7.0	15.6	8.8	8.8	8.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P855190

CATALOG NUMBER: SQ2-FB-0U-100D-835-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.76	19.45	18.13	19.76	20.08	26.50	28.18	26.86	28.50	28.81
	3H	18.55	20.08	18.93	20.40	20.76	28.18	29.70	28.56	30.03	30.39
	4H	18.89	20.32	19.29	20.67	21.05	28.40	29.83	28.80	30.18	30.56
	6H	19.15	20.48	19.56	20.84	21.23	28.53	29.86	28.94	30.22	30.61
	8H	19.23	20.50	19.65	20.89	21.29	28.55	29.82	28.98	30.21	30.61
	12H	19.28	20.50	19.71	20.88	21.31	28.55	29.77	28.98	30.15	30.58
4H	2H	22.26	23.69	22.66	24.04	24.41	27.04	28.47	27.44	28.82	29.20
	3H	23.27	24.47	23.67	24.86	25.26	28.94	30.14	29.35	30.54	30.94
	4H	23.58	24.67	24.02	25.08	25.52	29.21	30.30	29.64	30.71	31.14
	6H	23.76	24.71	24.22	25.15	25.60	29.41	30.35	29.86	30.79	31.25
	8H	23.81	24.69	24.27	25.13	25.60	29.45	30.34	29.91	30.78	31.24
	12H	23.84	24.63	24.32	25.11	25.58	29.47	30.26	29.95	30.74	31.20
8H	4H	24.83	25.71	25.29	26.16	26.62	29.40	30.28	29.86	30.73	31.19
	6H	25.10	25.84	25.60	26.32	26.80	29.64	30.38	30.14	30.86	31.34
	8H	25.19	25.84	25.69	26.35	26.83	29.72	30.37	30.22	30.88	31.36
	12H	25.25	25.83	25.76	26.32	26.88	29.75	30.33	30.25	30.82	31.38
12H	4H	24.89	25.68	25.37	26.16	26.62	29.39	30.19	29.87	30.66	31.13
	6H	25.21	25.87	25.72	26.37	26.86	29.64	30.29	30.14	30.80	31.28
	8H	25.35	25.93	25.86	26.42	26.98	29.74	30.32	30.25	30.81	31.37