

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855123

Luminaire Tested: SQ2-PP3-125U-125D-835-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855123
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-7)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PP3-125U-125D-835-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12117.2 lumens
Efficiency: N/A
Efficacy: 130.2 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 93.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855123

CATALOG NUMBER: SQ2-PP3-125U-125D-835-UNV-STD-W-4

Luminous Intensity Polar Plot

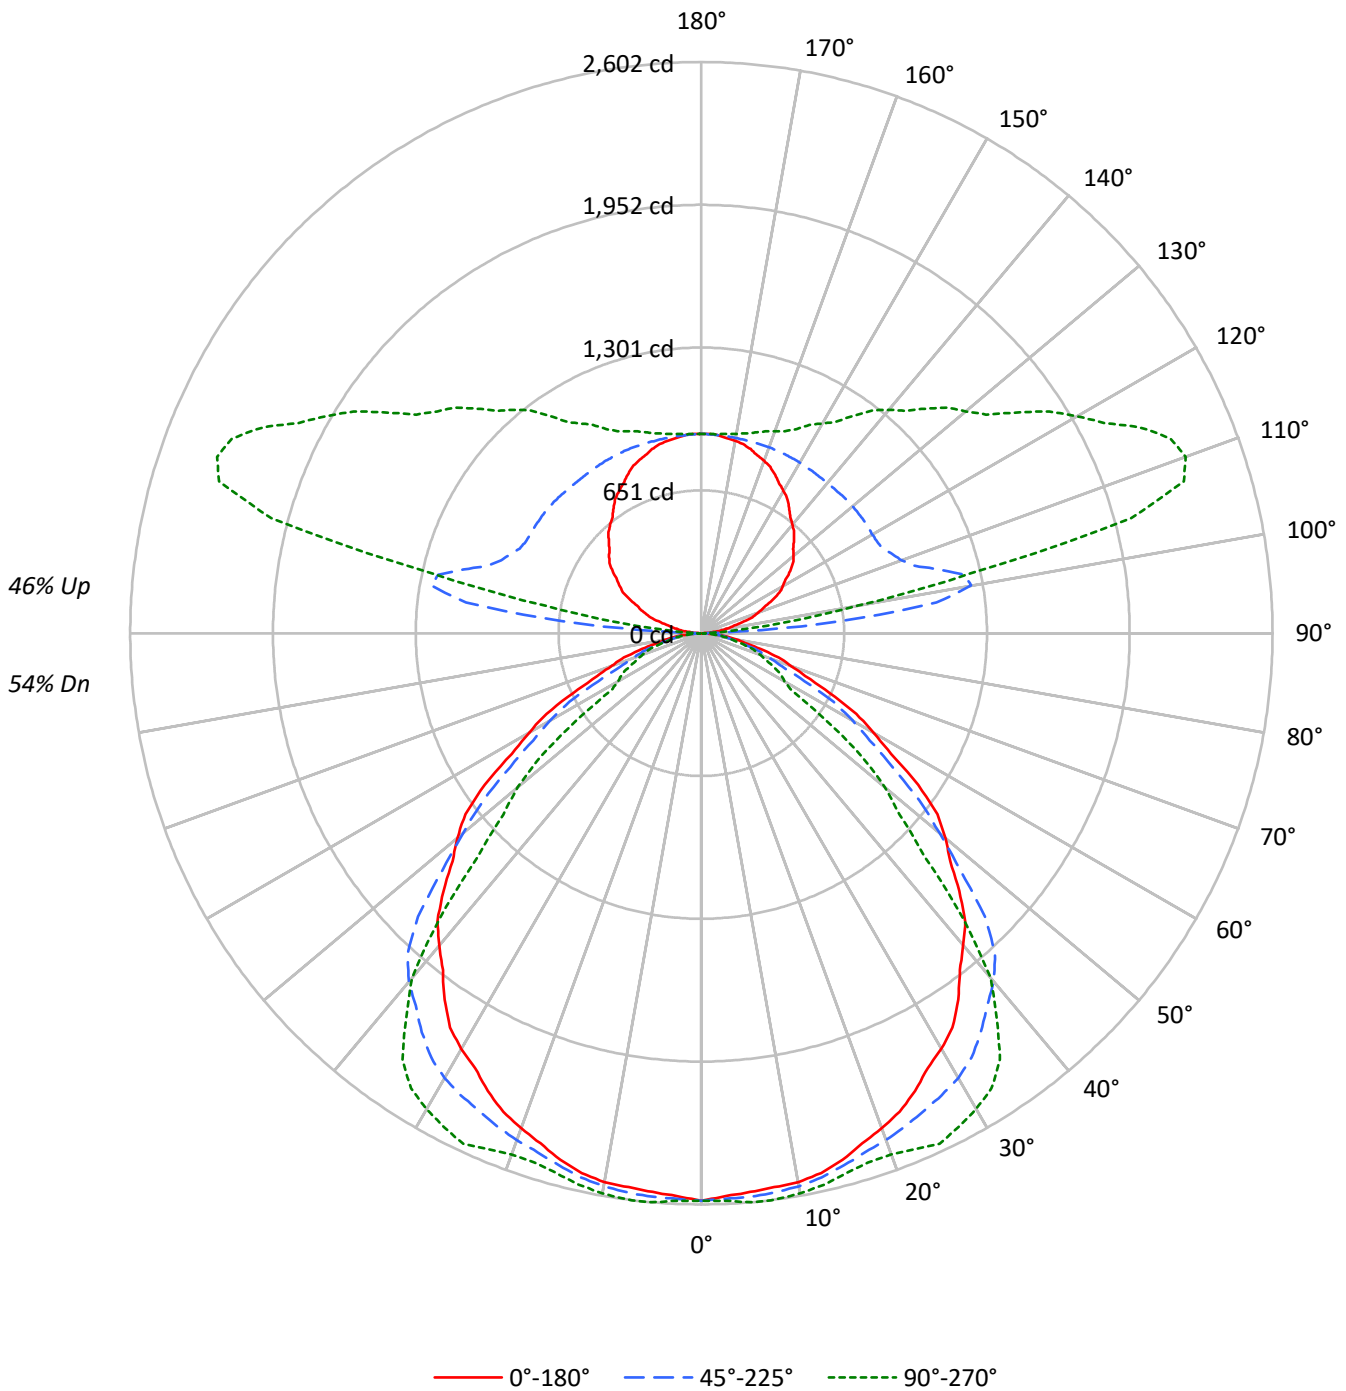



TEST NUMBER: P855123

CATALOG NUMBER: SQ2-PP3-125U-125D-835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	74	71	64	63	61	54	53	51	46
2	91	84	78	73	84	78	73	68	67	63	60	57	54	52	48	46	44	40
3	83	74	67	61	77	69	63	58	60	55	51	51	47	44	43	40	38	34
4	76	66	58	52	71	61	55	49	53	48	44	46	42	38	38	36	33	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	26
6	65	53	45	39	60	49	42	37	43	38	33	37	33	30	32	28	26	23
7	60	48	40	34	55	45	38	33	39	34	29	34	29	26	29	26	23	20
8	56	43	36	31	52	41	34	29	36	30	26	31	27	23	27	23	21	18
9	52	40	32	27	48	37	31	26	33	27	24	29	24	21	25	21	19	17
10	48	36	29	24	45	34	28	23	30	25	21	26	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	41743	41743	41743
5°	41417	41772	42169
10°	41627	41940	42478
15°	41526	41937	42576
20°	41230	42216	43436
25°	40996	42749	45719
30°	40762	43617	46674
35°	40186	43741	46759
40°	39112	43663	43203
45°	37943	41687	32887
50°	36452	35560	27392
55°	33926	29928	19696
60°	29214	25682	14121
65°	24642	19839	13887
70°	20516	15611	13294
75°	17386	13468	12445
80°	14737	11688	11186
85°	11634	9615	6076

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 41687 cd/sqm



TEST NUMBER: P855123

CATALOG NUMBER: SQ2-PP3-125U-125D-835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	246.2	2.0
10°-20°	712.5	5.9
20°-30°	1116.2	9.2
30°-40°	1377.0	11.4
40°-50°	1296.4	10.7
50°-60°	917.9	7.6
60°-70°	523.0	4.3
70°-80°	258.8	2.1
80°-90°	64.3	0.5
90°-100°	347.5	2.9
100°-110°	1131.4	9.3
110°-120°	1119.1	9.2
120°-130°	914.6	7.5
130°-140°	747.5	6.2
140°-150°	582.2	4.8
150°-160°	419.7	3.5
160°-170°	256.5	2.1
170°-180°	86.5	0.7
0°-30°	2074.9	17.1
0°-40°	3451.8	28.5
0°-60°	5666.1	46.8
0°-90°	6512.2	53.7
90°-120°	2598.0	21.4
90°-150°	4842.3	40.0
90°-180°	5605.0	46.3
0°-180°	12117.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2585	2585	2585	2585	2585	
5°	2555	2601	2577	2583	2602	243
15°	2484	2519	2509	2534	2547	700
25°	2301	2360	2400	2497	2566	1060
35°	2039	2095	2219	2346	2372	1272
45°	1662	1787	1826	1547	1440	1279
55°	1205	1277	1063	801	700	1063
65°	645	680	519	366	364	648
75°	279	308	216	202	200	302
85°	63	58	52	41	33	74
90°	0	3	8	7	7	5
95°	47	143	637	227	140	55
105°	192	277	1121	2141	2027	205
115°	355	424	913	1882	2214	352
125°	494	551	901	1486	1751	440
135°	597	659	896	1282	1446	461
145°	697	749	894	1104	1209	436
155°	796	822	900	989	1026	366
165°	868	876	902	936	946	245
175°	905	905	905	912	910	86
180°	908	908	908	908	908	



TEST NUMBER: P855123

CATALOG NUMBER: SQ2-PP3-125U-125D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2585.4	2585.4	2585.4	2585.4	2585.4
2.5°	2565.8	2602.1	2578.8	2583.4	2587.7
5°	2555.4	2600.8	2577.3	2583.1	2601.8
7.5°	2545.6	2592.1	2569.1	2578.8	2601.8
10°	2539.0	2579.1	2558.1	2572.2	2590.9
12.5°	2519.3	2557.2	2538.4	2556.9	2573.4
15°	2484.3	2519.1	2508.9	2533.8	2547.1
17.5°	2436.8	2479.0	2478.9	2514.1	2528.0
20°	2399.6	2450.4	2457.0	2501.3	2528.0
22.5°	2360.2	2419.6	2430.7	2497.4	2543.4
25°	2301.2	2360.0	2399.6	2496.8	2566.3
27.5°	2232.3	2290.6	2372.3	2481.2	2536.3
30°	2186.4	2242.5	2339.5	2452.7	2503.5
32.5°	2129.6	2187.8	2291.4	2413.3	2459.7
35°	2038.8	2094.9	2219.2	2345.6	2372.3
37.5°	1934.5	1998.1	2137.3	2207.8	2209.3
40°	1855.7	1938.5	2071.6	2084.5	2049.8
42.5°	1779.2	1885.6	1979.8	1922.1	1767.8
45°	1661.7	1787.2	1825.7	1547.2	1440.3
47.5°	1536.5	1660.5	1599.4	1297.6	1223.9
50°	1451.2	1568.8	1415.7	1160.0	1090.5
52.5°	1355.1	1459.8	1251.7	1028.0	922.1
55°	1205.2	1277.4	1063.2	801.2	699.7
57.5°	1024.8	1075.6	909.0	601.4	487.5
60°	904.7	944.7	795.3	493.4	437.3
62.5°	795.3	831.1	677.3	428.7	408.9
65°	645.0	679.8	519.3	366.2	363.5
67.5°	513.2	551.2	398.5	319.7	316.5
70°	434.6	474.6	330.7	286.9	281.6
72.5°	368.9	406.9	280.4	251.9	248.7
75°	278.7	308.2	215.9	202.2	199.5
77.5°	202.2	220.9	160.7	153.6	150.9
80°	158.5	166.6	125.7	122.9	120.3
82.5°	119.2	116.4	95.1	92.2	87.5
85°	62.8	57.5	51.9	40.9	32.8
87.5°	19.7	20.4	10.3	7.9	7.9
90°	0.0	3.3	7.8	6.7	6.7
92.5°	16.1	57.8	184.8	60.9	47.0
95°	47.0	143.0	636.9	227.1	139.6
97.5°	88.3	186.2	1081.0	658.4	401.9
100°	115.1	211.3	1248.1	1113.0	721.9
102.5°	145.5	238.1	1227.6	1646.6	1252.0
105°	192.2	277.4	1120.8	2140.7	2027.0
107.5°	242.7	322.9	1019.3	2183.4	2303.8
110°	279.4	352.5	971.1	2130.2	2347.7



TEST NUMBER: P855123

CATALOG NUMBER: SQ2-PP3-125U-125D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	309.7	382.0	940.6	2034.3	2314.6
115°	355.3	424.1	912.9	1881.5	2213.6
117.5°	402.3	464.3	902.2	1741.5	2072.2
120°	429.1	490.2	899.6	1655.5	1975.5
122.5°	455.0	515.4	900.5	1580.8	1879.0
125°	493.9	550.7	900.7	1485.5	1751.0
127.5°	527.2	585.3	900.5	1414.1	1635.5
130°	548.6	607.7	899.6	1373.3	1571.1
132.5°	567.4	629.1	898.7	1335.5	1521.1
135°	596.7	659.0	896.2	1282.1	1445.9
137.5°	625.4	688.1	893.7	1227.7	1373.3
140°	645.8	705.9	892.8	1191.0	1328.6
142.5°	665.5	723.0	892.8	1155.8	1278.6
145°	697.2	748.6	893.9	1104.2	1209.1
147.5°	728.1	772.7	895.5	1060.3	1141.3
150°	748.7	788.0	897.3	1034.0	1102.9
152.5°	769.2	801.6	898.2	1014.1	1069.0
155°	795.6	821.8	899.6	988.6	1025.7
157.5°	820.7	839.5	900.9	969.8	995.9
160°	835.8	851.1	901.7	958.1	978.9
162.5°	849.2	861.1	901.7	948.1	963.6
165°	868.2	875.9	901.7	935.5	946.4
167.5°	881.7	886.4	901.9	926.0	931.7
170°	890.6	892.8	902.8	919.7	921.9
172.5°	896.8	898.2	904.7	916.1	915.6
175°	905.1	905.1	905.1	911.8	909.6
177.5°	908.5	907.6	906.7	911.1	907.6
180°	908.5	908.5	908.5	908.5	908.5



TEST NUMBER: P855123

CATALOG NUMBER: SQ2-PP3-125U-125D-835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.85	21.71	21.78	22.66	23.88	17.25	18.11	18.18	19.05	20.27
	3H	21.95	22.71	22.89	23.67	24.91	18.35	19.12	19.29	20.07	21.32
	4H	22.29	23.01	23.25	23.97	25.22	18.81	19.54	19.77	20.50	21.75
	6H	22.50	23.17	23.47	24.13	25.40	19.16	19.83	20.13	20.79	22.06
	8H	22.55	23.19	23.53	24.17	25.43	19.25	19.88	20.22	20.86	22.12
	12H	22.57	23.17	23.55	24.14	25.43	19.26	19.86	20.24	20.84	22.12
4H	2H	20.96	21.68	21.92	22.64	23.90	17.96	18.69	18.92	19.64	20.90
	3H	22.27	22.87	23.24	23.86	25.12	19.21	19.81	20.18	20.80	22.07
	4H	22.74	23.29	23.72	24.27	25.56	19.77	20.31	20.75	21.30	22.59
	6H	23.08	23.55	24.07	24.56	25.85	20.21	20.68	21.20	21.68	22.97
	8H	23.17	23.61	24.17	24.61	25.91	20.33	20.77	21.32	21.77	23.07
	12H	23.21	23.61	24.22	24.62	25.93	20.36	20.75	21.37	21.77	23.08
8H	4H	22.76	23.20	23.76	24.20	25.50	20.04	20.48	21.04	21.48	22.78
	6H	23.19	23.55	24.21	24.59	25.90	20.58	20.95	21.60	21.99	23.29
	8H	23.35	23.67	24.38	24.70	26.02	20.77	21.09	21.80	22.12	23.44
	12H	23.43	23.72	24.47	24.74	26.10	20.84	21.13	21.88	22.15	23.51
12H	4H	22.72	23.12	23.73	24.13	25.44	20.05	20.44	21.06	21.46	22.77
	6H	23.18	23.50	24.21	24.53	25.85	20.64	20.96	21.67	21.99	23.31
	8H	23.35	23.63	24.38	24.65	26.02	20.85	21.13	21.88	22.15	23.51