

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855090

Luminaire Tested: SQ2-PW1-025U-050D-835-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855090
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-025U-050D-835-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3781.4 lumens
Efficiency: N/A
Efficacy: 150.1 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 25.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855090

CATALOG NUMBER: SQ2-PW1-025U-050D-835-UNV-STD-W-4

Luminous Intensity Polar Plot

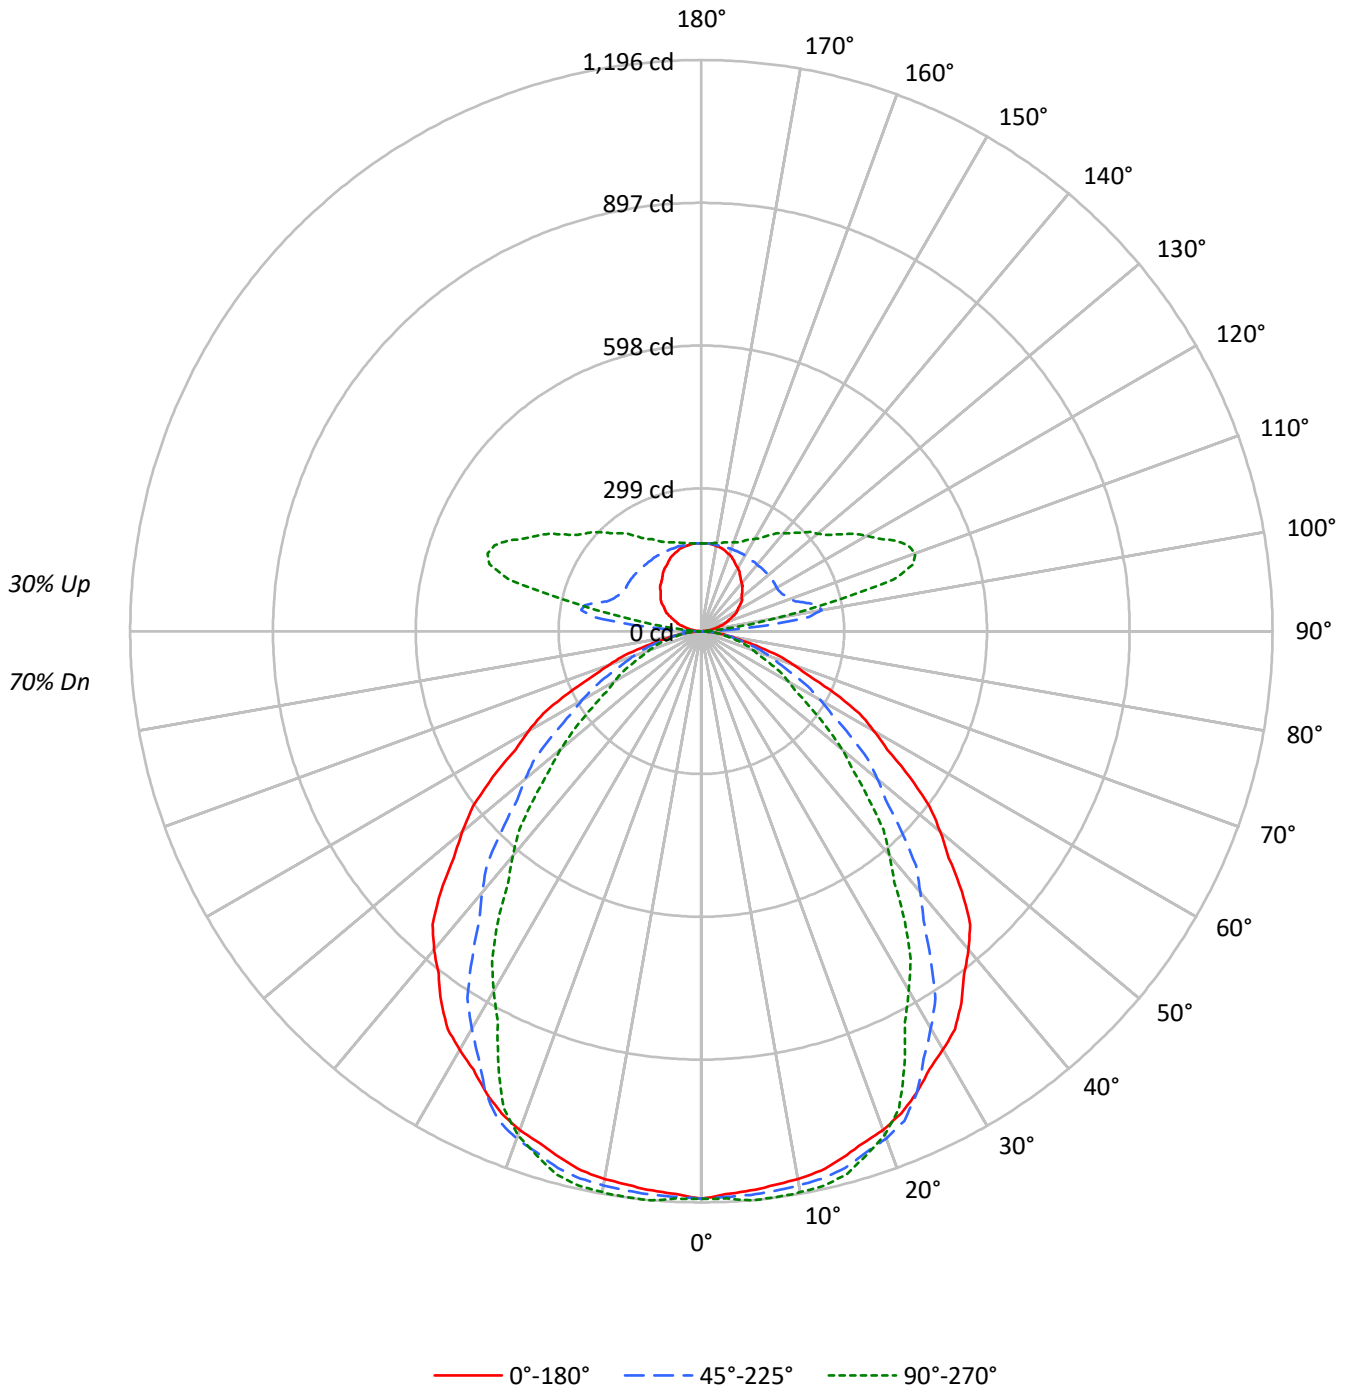



TEST NUMBER: P855090

CATALOG NUMBER: SQ2-PW1-025U-050D-835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	74	74	74	70	
1	103	99	95	92	97	94	90	88	84	82	79	75	73	72	67	66	64	64	64	64	60	
2	94	87	81	76	89	83	78	73	75	71	67	67	64	61	60	58	55	55	55	55	52	
3	87	77	70	65	82	74	67	62	67	61	57	60	56	53	54	51	48	48	48	48	45	
4	80	69	61	55	75	66	59	53	60	54	50	54	49	46	49	45	42	42	42	42	39	
5	74	62	54	48	69	59	52	47	54	48	43	49	44	40	44	40	37	37	37	37	34	
6	68	56	48	42	64	54	46	41	49	43	38	44	39	36	40	36	33	33	33	33	31	
7	63	51	43	38	60	49	42	36	45	39	34	41	36	32	37	33	30	30	30	30	27	
8	59	47	39	34	56	45	38	33	41	35	31	37	32	29	34	30	27	27	27	27	25	
9	55	43	35	30	52	41	34	29	38	32	28	35	30	26	32	27	24	24	24	24	22	
10	52	39	32	27	49	38	31	27	35	29	25	32	27	24	29	25	22	22	22	22	20	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19184	19184	19184
5°	19057	19204	19387
10°	19092	19315	19556
15°	19086	19447	19672
20°	19094	19424	19289
25°	18991	19012	17922
30°	18862	17913	16203
35°	18715	16484	14633
40°	18341	15026	12929
45°	17623	13515	11291
50°	16402	12082	9666
55°	15004	10671	7837
60°	13449	9281	6762
65°	11759	8000	6010
70°	9616	7105	5448
75°	7486	6145	5009
80°	5579	5263	4417
85°	3779	3983	2519

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17623 cd/sqm



TEST NUMBER: P855090

CATALOG NUMBER: SQ2-PW1-025U-050D-835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	113.1	3.0
10°-20°	327.8	8.7
20°-30°	482.4	12.8
30°-40°	527.5	13.9
40°-50°	473.2	12.5
50°-60°	353.0	9.3
60°-70°	223.1	5.9
70°-80°	110.5	2.9
80°-90°	26.3	0.7
90°-100°	74.6	2.0
100°-110°	232.1	6.1
110°-120°	227.1	6.0
120°-130°	185.4	4.9
130°-140°	151.7	4.0
140°-150°	118.4	3.1
150°-160°	85.4	2.3
160°-170°	52.2	1.4
170°-180°	17.6	0.5
0°-30°	923.4	24.4
0°-40°	1450.9	38.4
0°-60°	2277.1	60.2
0°-90°	2637.0	69.7
90°-120°	533.8	14.1
90°-150°	989.2	26.2
90°-180°	1144.0	30.3
0°-180°	3781.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1188	1188	1188	1188	1188	
5°	1176	1195	1185	1186	1196	112
15°	1142	1164	1163	1171	1177	322
25°	1066	1089	1067	1023	1006	491
35°	950	940	836	763	742	592
45°	772	710	592	518	494	592
55°	533	482	379	297	278	476
65°	308	282	209	168	157	305
75°	120	129	98	83	80	132
85°	20	26	22	15	14	26
90°	0	1	3	3	3	1
95°	10	30	137	50	33	12
105°	41	57	228	436	416	43
115°	72	86	186	383	448	71
125°	101	112	183	301	353	89
135°	121	134	182	260	292	94
145°	142	152	182	224	244	89
155°	162	167	183	202	208	75
165°	178	179	184	190	192	50
175°	184	184	184	186	184	17
180°	184	184	184	184	184	

TEST NUMBER: P855090

CATALOG NUMBER: SQ2-PW1-025U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1180.1	1195.2	1185.5	1186.5	1189.2
5°	1175.8	1194.6	1184.9	1186.2	1196.2
7.5°	1169.9	1188.9	1181.7	1185.8	1195.5
10°	1164.5	1184.4	1178.1	1183.9	1192.8
12.5°	1157.2	1178.1	1173.5	1180.3	1189.2
15°	1141.8	1164.0	1163.4	1171.4	1176.9
17.5°	1124.0	1146.1	1145.0	1147.2	1149.8
20°	1111.3	1133.5	1130.5	1122.6	1122.6
22.5°	1093.2	1117.1	1109.7	1088.1	1081.0
25°	1066.0	1089.2	1067.2	1022.7	1006.0
27.5°	1034.3	1053.1	1008.8	945.5	922.5
30°	1011.7	1026.1	960.8	891.3	869.1
32.5°	988.2	993.7	911.9	839.6	815.7
35°	949.5	939.5	836.3	763.4	742.4
37.5°	903.7	874.1	763.6	687.3	664.1
40°	870.2	828.3	712.9	636.6	613.4
42.5°	833.1	780.5	665.0	588.6	564.5
45°	771.8	709.9	591.9	517.7	494.5
47.5°	702.8	641.2	523.5	451.8	431.8
50°	653.0	593.2	481.0	409.1	384.8
52.5°	602.3	548.7	439.3	365.4	332.3
55°	533.0	482.1	379.1	297.2	278.4
57.5°	461.7	417.7	324.6	250.2	234.7
60°	416.5	377.7	287.4	224.9	209.4
62.5°	373.0	338.7	251.2	201.3	188.5
65°	307.8	282.4	209.4	168.4	157.3
67.5°	244.4	230.3	174.0	138.2	130.8
70°	203.7	199.3	150.5	121.0	115.4
72.5°	168.4	170.2	127.9	104.7	100.9
75°	120.0	128.8	98.5	82.6	80.3
77.5°	81.7	94.9	72.9	61.1	59.3
80°	60.0	73.2	56.6	47.5	47.5
82.5°	41.9	52.5	40.3	35.8	35.8
85°	20.4	25.9	21.5	14.7	13.6
87.5°	5.4	8.3	4.3	3.4	3.4
90°	0.0	1.1	3.4	3.4	3.4
92.5°	3.6	12.7	43.2	14.1	11.5
95°	10.2	30.1	136.9	50.5	32.8
97.5°	18.6	39.2	226.7	141.1	88.9
100°	24.9	43.7	255.6	239.1	159.6
102.5°	31.2	49.1	250.2	341.5	268.1
105°	40.7	57.4	228.5	436.3	416.3
107.5°	50.2	65.7	207.7	443.5	465.5
110°	56.6	72.1	196.8	433.1	476.3



TEST NUMBER: P855090

CATALOG NUMBER: SQ2-PW1-025U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	62.9	77.5	191.4	414.4	469.1
115°	72.4	85.7	185.5	382.7	448.0
117.5°	81.7	93.8	183.0	352.4	419.3
120°	87.1	99.2	182.1	335.2	399.4
122.5°	92.6	104.7	183.0	320.6	379.4
125°	100.7	111.7	183.2	301.0	353.0
127.5°	107.3	118.5	183.2	286.3	330.6
130°	110.9	123.0	183.2	278.0	317.9
132.5°	115.4	127.5	182.3	270.8	307.9
135°	121.1	134.3	182.1	259.8	291.9
137.5°	127.7	139.8	182.1	248.9	278.0
140°	131.3	143.4	182.1	241.6	268.1
142.5°	135.8	147.0	182.1	234.3	258.1
145°	141.5	152.4	182.1	224.4	244.3
147.5°	148.2	157.8	183.2	215.4	231.0
150°	152.8	160.5	183.2	210.7	222.8
152.5°	156.4	163.2	183.2	206.1	216.5
155°	161.8	167.3	183.2	201.5	208.1
157.5°	167.3	171.4	183.2	197.4	201.5
160°	170.9	174.2	183.2	194.6	197.9
162.5°	173.5	176.0	183.2	192.8	195.2
165°	177.6	178.7	184.3	190.1	192.3
167.5°	180.0	180.3	183.2	188.5	189.6
170°	181.0	182.1	183.2	186.7	187.7
172.5°	182.8	183.0	184.1	185.8	185.9
175°	184.3	184.3	184.3	185.5	184.3
177.5°	184.3	184.3	184.3	184.3	184.3
180°	184.3	184.3	184.3	184.3	184.3

TEST NUMBER: P855090

CATALOG NUMBER: SQ2-PW1-025U-050D-835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.99	20.01	19.77	20.80	21.76	15.48	16.49	16.26	17.28	18.25
	3H	20.33	21.23	21.12	22.03	23.03	16.70	17.60	17.49	18.40	19.40
	4H	20.71	21.56	21.52	22.37	23.37	17.15	18.00	17.96	18.81	19.82
	6H	20.92	21.70	21.74	22.52	23.54	17.48	18.26	18.29	19.08	20.09
	8H	20.96	21.70	21.79	22.54	23.56	17.55	18.30	18.38	19.14	20.15
	12H	20.96	21.67	21.79	22.50	23.54	17.57	18.28	18.41	19.11	20.15
4H	2H	19.12	19.97	19.93	20.78	21.78	16.18	17.03	16.99	17.84	18.85
	3H	20.67	21.38	21.50	22.22	23.24	17.58	18.29	18.41	19.13	20.15
	4H	21.19	21.83	22.02	22.67	23.72	18.14	18.78	18.97	19.62	20.67
	6H	21.53	22.08	22.38	22.95	24.00	18.55	19.10	19.40	19.97	21.02
	8H	21.61	22.13	22.47	22.99	24.05	18.66	19.17	19.51	20.03	21.10
	12H	21.63	22.09	22.51	22.98	24.05	18.68	19.15	19.56	20.03	21.10
8H	4H	21.24	21.75	22.09	22.62	23.68	18.47	18.99	19.33	19.85	20.91
	6H	21.68	22.11	22.56	23.01	24.07	18.98	19.41	19.87	20.31	21.38
	8H	21.82	22.20	22.72	23.10	24.18	19.15	19.52	20.04	20.42	21.50
	12H	21.90	22.23	22.79	23.12	24.26	19.21	19.55	20.11	20.44	21.57
12H	4H	21.20	21.67	22.08	22.55	23.62	18.50	18.96	19.37	19.84	20.91
	6H	21.67	22.05	22.57	22.95	24.03	19.05	19.43	19.94	20.33	21.41
	8H	21.84	22.17	22.74	23.06	24.20	19.24	19.57	20.14	20.46	21.60