

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855088

Luminaire Tested: SQ2-PW1-025U-100D-835-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855088
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-025U-100D-835-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6249.2 lumens
Efficiency: N/A
Efficacy: 138.9 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 45
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855088

CATALOG NUMBER: SQ2-PW1-025U-100D-835-UNV-STD-W-4

Luminous Intensity Polar Plot

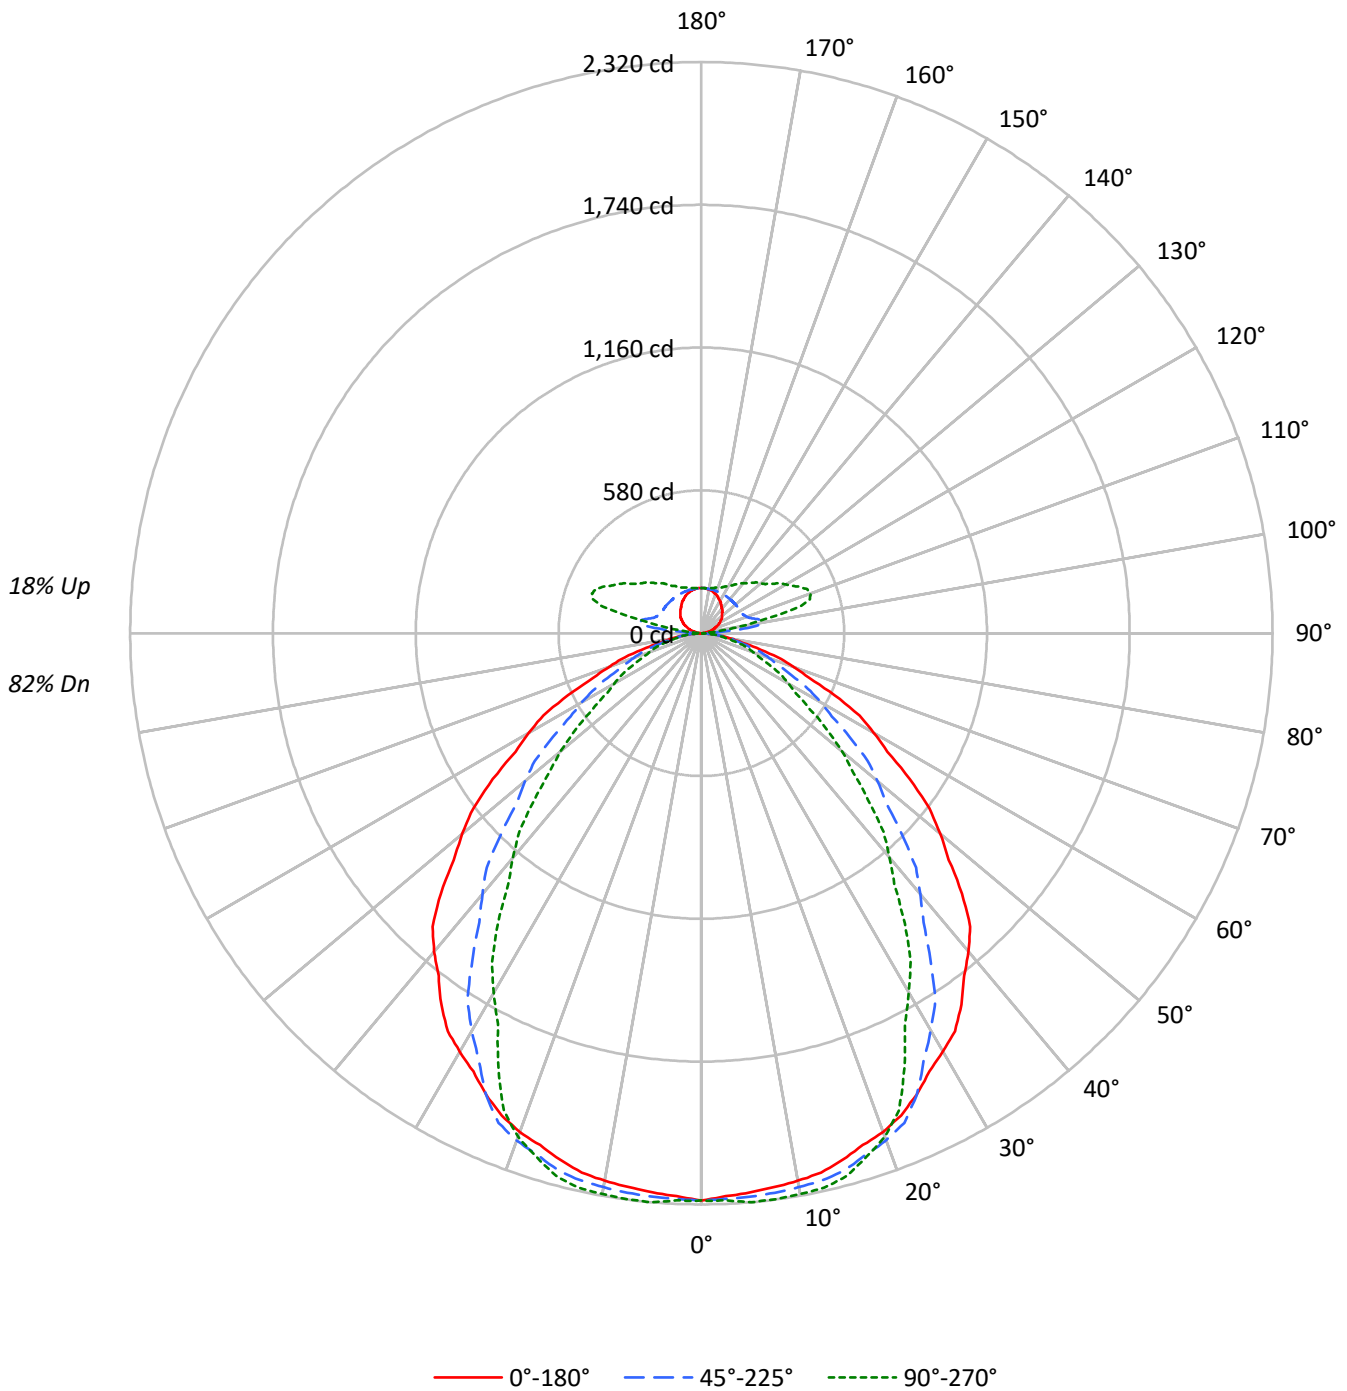



TEST NUMBER: P855088

CATALOG NUMBER: SQ2-PW1-025U-100D-835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	115	115	115	115	110	110	110	110	101	101	101	93	93	93	85	85	85	82		
1	106	102	98	95	101	98	94	91	90	88	85	83	81	80	77	75	74	71		
2	97	90	84	79	93	87	81	77	80	76	72	74	71	68	69	66	64	61		
3	89	80	73	67	85	77	71	65	72	66	62	67	62	59	62	58	55	53		
4	82	72	64	58	79	69	62	56	64	58	54	60	55	51	56	52	49	46		
5	76	64	56	50	73	62	55	49	58	52	47	54	49	45	51	46	43	40		
6	70	58	50	44	67	56	49	43	53	46	42	50	44	40	46	42	38	36		
7	65	53	45	39	63	51	44	39	48	42	37	45	40	36	43	38	34	32		
8	61	49	41	35	59	47	40	35	44	38	33	42	36	32	39	35	31	29		
9	57	45	37	32	55	43	36	31	41	35	30	39	33	29	37	32	28	26		
10	54	41	34	29	51	40	33	29	38	32	28	36	31	27	34	29	26	24		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	37210	37210	37210
5°	36961	37246	37601
10°	37030	37461	37930
15°	37020	37717	38158
20°	37036	37675	37412
25°	36836	36873	34762
30°	36584	34742	31428
35°	36299	31970	28381
40°	35576	29145	25073
45°	34182	26213	21902
50°	31810	23431	18746
55°	29101	20701	15198
60°	26085	18006	13110
65°	22812	15511	11656
70°	18652	13785	10565
75°	14516	11909	9719
80°	10814	10209	8573
85°	7317	7744	4891

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 34182 cd/sqm



TEST NUMBER: P855088

CATALOG NUMBER: SQ2-PW1-025U-100D-835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.5	3.5
10°-20°	635.9	10.2
20°-30°	935.7	15.0
30°-40°	1023.1	16.4
40°-50°	917.8	14.7
50°-60°	684.6	11.0
60°-70°	432.7	6.9
70°-80°	214.3	3.4
80°-90°	50.6	0.8
90°-100°	74.0	1.2
100°-110°	230.2	3.7
110°-120°	225.2	3.6
120°-130°	183.8	2.9
130°-140°	150.4	2.4
140°-150°	117.4	1.9
150°-160°	84.7	1.4
160°-170°	51.8	0.8
170°-180°	17.5	0.3
0°-30°	1791.1	28.7
0°-40°	2814.1	45.0
0°-60°	4416.5	70.7
0°-90°	5114.2	81.8
90°-120°	529.5	8.5
90°-150°	981.1	15.7
90°-180°	1135.0	18.2
0°-180°	6249.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2305	2305	2305	2305	2305	
5°	2280	2317	2298	2301	2320	217
15°	2215	2258	2256	2272	2283	625
25°	2068	2113	2070	1984	1951	952
35°	1842	1822	1622	1481	1440	1149
45°	1497	1377	1148	1004	959	1148
55°	1034	935	735	576	540	923
65°	597	548	406	327	305	592
75°	233	250	191	160	156	256
85°	40	50	42	28	26	50
90°	0	1	3	3	3	2
95°	10	30	136	50	33	12
105°	40	57	227	433	413	43
115°	72	85	184	380	444	71
125°	100	111	182	298	350	89
135°	120	133	181	258	290	93
145°	140	151	181	223	242	88
155°	160	166	182	200	206	74
165°	176	177	183	188	191	50
175°	183	183	183	184	183	17
180°	183	183	183	183	183	



TEST NUMBER: P855088

CATALOG NUMBER: SQ2-PW1-025U-100D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2304.6	2304.6	2304.6	2304.6	2304.6
2.5°	2288.9	2318.1	2299.4	2301.4	2306.4
5°	2280.5	2317.1	2298.1	2300.8	2320.0
7.5°	2269.1	2306.0	2292.0	2299.9	2318.8
10°	2258.6	2297.3	2284.9	2296.3	2313.5
12.5°	2244.5	2284.9	2276.1	2289.2	2306.4
15°	2214.7	2257.7	2256.4	2272.0	2282.8
17.5°	2180.0	2222.9	2220.9	2225.0	2230.1
20°	2155.5	2198.4	2192.7	2177.4	2177.4
22.5°	2120.3	2166.7	2152.3	2110.3	2096.6
25°	2067.7	2112.7	2069.8	1983.5	1951.3
27.5°	2006.2	2042.7	1956.5	1834.0	1789.3
30°	1962.3	1990.1	1863.5	1728.6	1685.7
32.5°	1916.6	1927.3	1768.7	1628.5	1582.1
35°	1841.6	1822.2	1622.0	1480.7	1439.9
37.5°	1752.8	1695.3	1481.1	1333.1	1287.9
40°	1687.9	1606.4	1382.8	1234.8	1189.6
42.5°	1615.9	1513.7	1289.8	1141.6	1094.9
45°	1497.0	1376.8	1148.0	1004.2	959.2
47.5°	1363.1	1243.7	1015.3	876.2	837.5
50°	1266.4	1150.6	932.8	793.5	746.3
52.5°	1168.1	1064.3	852.0	708.9	644.5
55°	1033.8	935.1	735.4	576.5	539.9
57.5°	895.5	810.2	629.5	485.3	455.3
60°	807.8	732.6	557.6	436.1	406.0
62.5°	723.5	656.9	487.3	390.5	365.6
65°	597.1	547.6	406.0	326.6	305.1
67.5°	474.1	446.7	337.6	267.9	253.7
70°	395.1	386.5	292.0	234.6	223.8
72.5°	326.6	330.0	248.1	203.1	195.8
75°	232.7	249.9	190.9	160.1	155.8
77.5°	158.4	184.2	141.3	118.5	115.0
80°	116.3	142.1	109.8	92.2	92.2
82.5°	81.3	101.8	78.1	69.4	69.4
85°	39.5	50.2	41.8	28.5	26.4
87.5°	10.5	16.0	7.7	5.9	5.9
90°	0.0	1.1	3.4	3.4	3.4
92.5°	3.6	12.6	42.9	14.0	11.4
95°	10.1	29.9	135.8	50.1	32.6
97.5°	18.4	38.8	224.9	140.0	88.2
100°	24.7	43.3	253.6	237.2	158.2
102.5°	31.0	48.8	248.2	338.7	265.9
105°	40.4	56.8	226.7	432.6	412.9
107.5°	49.8	65.2	206.0	439.9	461.6
110°	56.1	71.4	195.2	429.6	472.4



TEST NUMBER: P855088

CATALOG NUMBER: SQ2-PW1-025U-100D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	62.4	76.8	189.9	411.0	465.2
115°	71.9	85.0	184.0	379.6	444.3
117.5°	81.0	93.0	181.5	349.6	415.8
120°	86.3	98.5	180.6	332.5	396.1
122.5°	91.8	103.9	181.5	318.0	376.3
125°	99.8	110.8	181.7	298.5	350.0
127.5°	106.4	117.6	181.7	283.9	327.8
130°	110.0	122.0	181.7	275.8	315.3
132.5°	114.4	126.5	180.8	268.5	305.4
135°	120.1	133.2	180.6	257.7	289.5
137.5°	126.5	138.6	180.6	246.8	275.8
140°	130.1	142.3	180.6	239.6	265.9
142.5°	134.7	145.9	180.6	232.3	256.0
145°	140.2	151.2	180.6	222.6	242.4
147.5°	147.0	156.4	181.7	213.5	229.2
150°	151.4	159.1	181.7	209.0	221.0
152.5°	155.0	161.8	181.7	204.5	214.8
155°	160.5	165.9	181.7	199.9	206.4
157.5°	165.8	170.0	181.7	195.8	200.0
160°	169.4	172.7	181.7	193.1	196.3
162.5°	172.1	174.5	181.7	191.3	193.6
165°	176.2	177.2	182.9	188.5	190.7
167.5°	178.6	178.8	181.7	187.0	188.1
170°	179.5	180.6	181.7	185.1	186.3
172.5°	181.3	181.5	182.7	184.2	184.5
175°	182.9	182.9	182.9	184.0	182.9
177.5°	182.9	182.9	182.9	182.9	182.9
180°	182.9	182.9	182.9	182.9	182.9



TEST NUMBER: P855088

CATALOG NUMBER: SQ2-PW1-025U-100D-835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	22.21	23.38	22.85	24.02	24.75	18.70	19.87	19.33	20.51	21.24
	3H	23.56	24.60	24.21	25.25	26.02	19.93	20.97	20.58	21.62	22.39
	4H	23.95	24.93	24.61	25.59	26.37	20.39	21.37	21.06	22.03	22.82
	6H	24.17	25.07	24.85	25.74	26.54	20.72	21.63	21.40	22.30	23.10
	8H	24.21	25.07	24.90	25.76	26.56	20.80	21.67	21.50	22.36	23.16
	12H	24.21	25.03	24.91	25.72	26.55	20.83	21.65	21.52	22.33	23.16
4H	2H	22.35	23.34	23.02	24.00	24.78	19.42	20.40	20.09	21.06	21.85
	3H	23.93	24.74	24.61	25.44	26.24	20.83	21.65	21.52	22.35	23.15
	4H	24.45	25.18	25.15	25.89	26.72	21.39	22.13	22.09	22.83	23.66
	6H	24.79	25.43	25.51	26.16	27.00	21.81	22.45	22.53	23.18	24.02
	8H	24.88	25.47	25.60	26.20	27.05	21.92	22.52	22.65	23.24	24.10
	12H	24.91	25.44	25.65	26.19	27.05	21.96	22.49	22.70	23.24	24.10
8H	4H	24.51	25.10	25.23	25.83	26.68	21.74	22.33	22.46	23.06	23.91
	6H	24.95	25.44	25.71	26.21	27.07	22.26	22.75	23.01	23.52	24.37
	8H	25.10	25.54	25.87	26.31	27.18	22.42	22.86	23.19	23.63	24.50
	12H	25.18	25.56	25.95	26.32	27.26	22.50	22.88	23.26	23.64	24.57
12H	4H	24.48	25.01	25.22	25.76	26.62	21.77	22.30	22.51	23.05	23.91
	6H	24.95	25.38	25.71	26.16	27.03	22.32	22.76	23.09	23.53	24.40
	8H	25.12	25.51	25.89	26.27	27.20	22.52	22.91	23.29	23.67	24.60