

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855066

Luminaire Tested: SQ2-PW1-150U-050D-835-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855066
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-14, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-150U-050D-835-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9433.4 lumens
Efficiency: N/A
Efficacy: 126.8 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 74.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855066

CATALOG NUMBER: SQ2-PW1-150U-050D-835-UNV-STD-W-4

Luminous Intensity Polar Plot

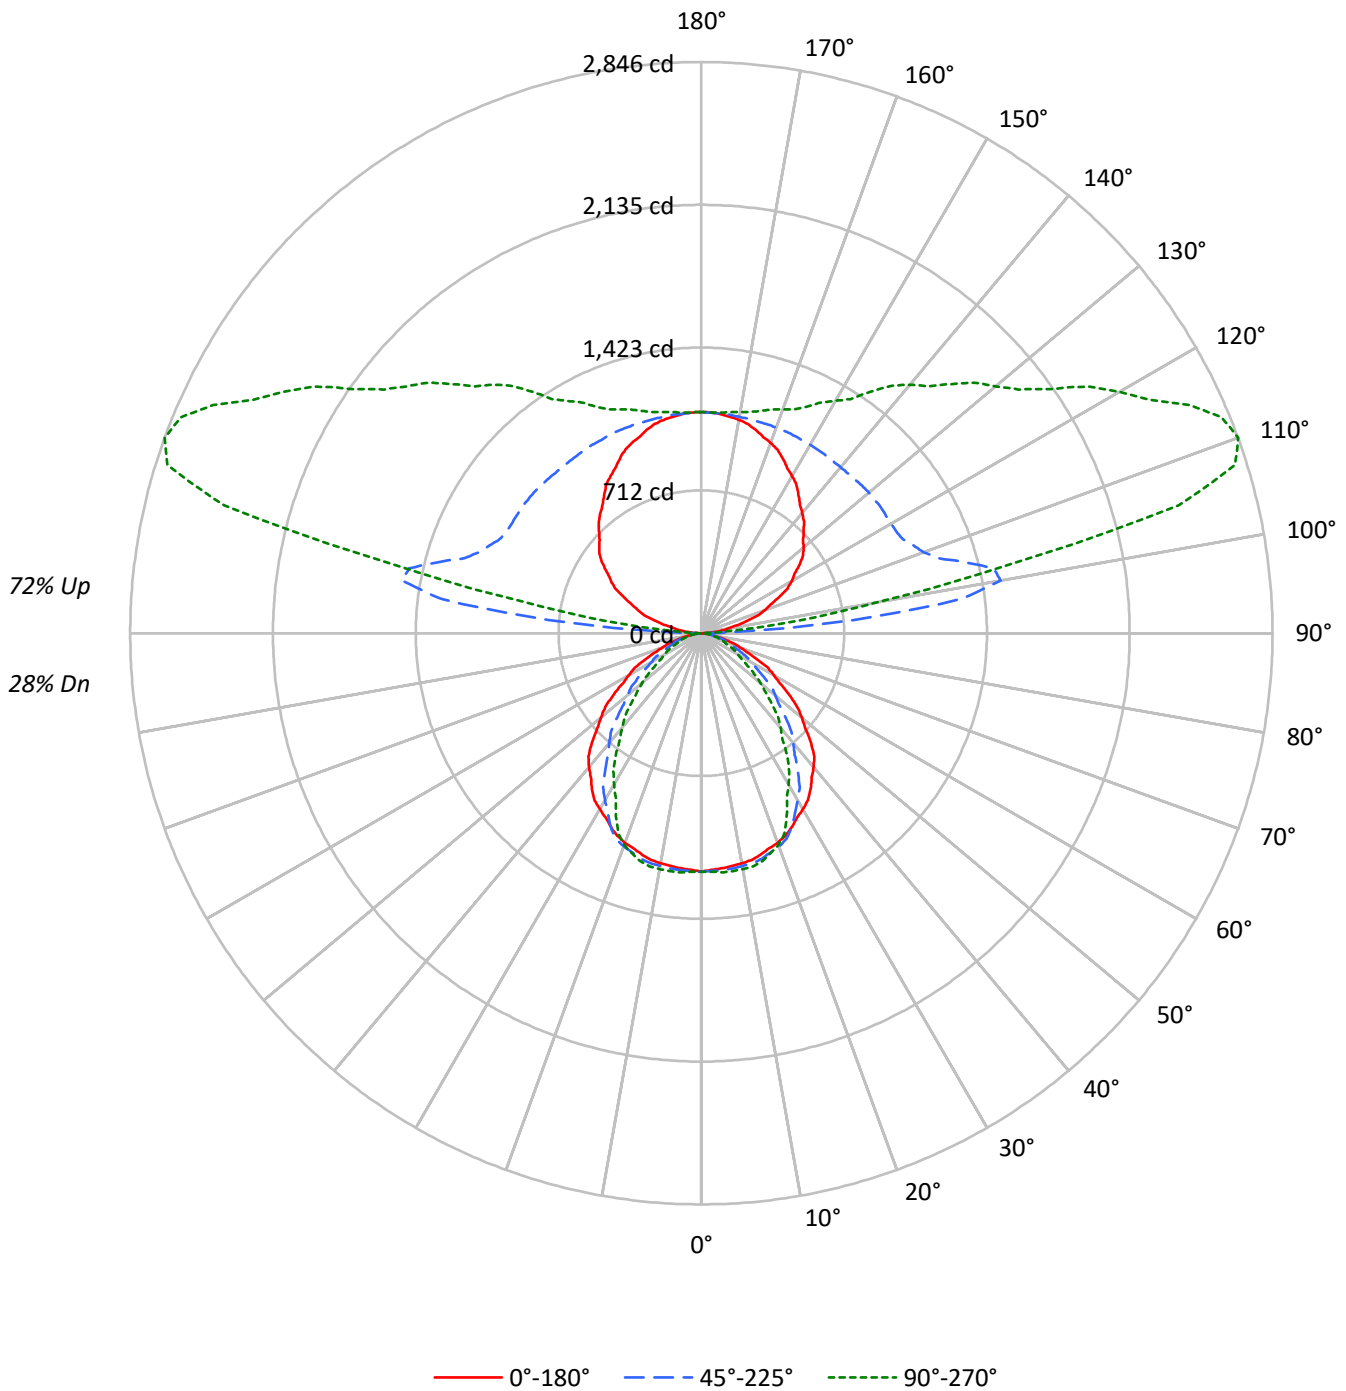

TEST NUMBER: P855066

CATALOG NUMBER: SQ2-PW1-150U-050D-835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28				
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31	24				
2	85	78	72	68	76	70	65	61	55	52	49	41	39	38	29	28	26	21				
3	78	69	62	57	69	62	56	52	49	45	42	37	34	32	26	24	23	18				
4	71	61	54	48	64	55	49	44	44	39	36	33	30	28	23	21	20	16				
5	65	54	47	41	58	49	43	38	39	34	31	30	27	24	21	19	18	14				
6	60	49	41	36	54	44	37	33	35	30	27	27	24	21	19	17	16	12				
7	56	44	36	31	50	40	33	29	32	27	24	24	21	19	17	15	14	11				
8	51	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	12	10				
9	48	36	29	24	43	33	27	22	27	22	19	21	17	15	15	13	11	9				
10	45	33	26	22	40	30	24	20	24	20	17	19	16	14	14	12	10	8				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19184	19184	19184
5°	19057	19204	19387
10°	19092	19315	19556
15°	19086	19447	19672
20°	19094	19424	19289
25°	18991	19012	17922
30°	18862	17913	16203
35°	18715	16484	14633
40°	18341	15026	12929
45°	17623	13515	11291
50°	16402	12082	9666
55°	15004	10671	7837
60°	13449	9281	6762
65°	11759	8000	6010
70°	9616	7105	5448
75°	7486	6145	5009
80°	5579	5263	4417
85°	3779	3983	2519

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17623 cd/sqm



TEST NUMBER: P855066

CATALOG NUMBER: SQ2-PW1-150U-050D-835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	113.1	1.2
10°-20°	327.8	3.5
20°-30°	482.4	5.1
30°-40°	527.5	5.6
40°-50°	473.2	5.0
50°-60°	353.0	3.7
60°-70°	223.1	2.4
70°-80°	110.5	1.2
80°-90°	27.1	0.3
90°-100°	419.5	4.4
100°-110°	1373.7	14.6
110°-120°	1358.1	14.4
120°-130°	1110.2	11.8
130°-140°	906.0	9.6
140°-150°	705.1	7.5
150°-160°	507.7	5.4
160°-170°	310.6	3.3
170°-180°	104.9	1.1
0°-30°	923.4	9.8
0°-40°	1450.9	15.4
0°-60°	2277.1	24.1
0°-90°	2637.7	28.0
90°-120°	3151.3	33.4
90°-150°	5872.5	62.3
90°-180°	6796.0	72.0
0°-180°	9433.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1188	1188	1188	1188	1188	
5°	1176	1195	1185	1186	1196	112
15°	1142	1164	1163	1171	1177	322
25°	1066	1089	1067	1023	1006	491
35°	950	940	836	763	742	592
45°	772	710	592	518	494	592
55°	533	482	379	297	278	476
65°	308	282	209	168	157	305
75°	120	129	98	83	80	132
85°	20	26	22	15	14	26
90°	1	3	9	8	9	4
95°	59	170	763	272	176	67
105°	239	340	1364	2591	2461	252
115°	430	514	1108	2289	2688	425
125°	599	667	1092	1805	2121	533
135°	721	797	1083	1557	1755	558
145°	843	905	1081	1339	1468	528
155°	961	993	1087	1198	1245	442
165°	1049	1059	1092	1134	1146	296
175°	1096	1096	1098	1106	1103	104
180°	1101	1101	1101	1101	1101	



TEST NUMBER: P855066

CATALOG NUMBER: SQ2-PW1-150U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1180.1	1195.2	1185.5	1186.5	1189.2
5°	1175.8	1194.6	1184.9	1186.2	1196.2
7.5°	1169.9	1188.9	1181.7	1185.8	1195.5
10°	1164.5	1184.4	1178.1	1183.9	1192.8
12.5°	1157.2	1178.1	1173.5	1180.3	1189.2
15°	1141.8	1164.0	1163.4	1171.4	1176.9
17.5°	1124.0	1146.1	1145.0	1147.2	1149.8
20°	1111.3	1133.5	1130.5	1122.6	1122.6
22.5°	1093.2	1117.1	1109.7	1088.1	1081.0
25°	1066.0	1089.2	1067.2	1022.7	1006.0
27.5°	1034.3	1053.1	1008.8	945.5	922.5
30°	1011.7	1026.1	960.8	891.3	869.1
32.5°	988.2	993.7	911.9	839.6	815.7
35°	949.5	939.5	836.3	763.4	742.4
37.5°	903.7	874.1	763.6	687.3	664.1
40°	870.2	828.3	712.9	636.6	613.4
42.5°	833.1	780.5	665.0	588.6	564.5
45°	771.8	709.9	591.9	517.7	494.5
47.5°	702.8	641.2	523.5	451.8	431.8
50°	653.0	593.2	481.0	409.1	384.8
52.5°	602.3	548.7	439.3	365.4	332.3
55°	533.0	482.1	379.1	297.2	278.4
57.5°	461.7	417.7	324.6	250.2	234.7
60°	416.5	377.7	287.4	224.9	209.4
62.5°	373.0	338.7	251.2	201.3	188.5
65°	307.8	282.4	209.4	168.4	157.3
67.5°	244.4	230.3	174.0	138.2	130.8
70°	203.7	199.3	150.5	121.0	115.4
72.5°	168.4	170.2	127.9	104.7	100.9
75°	120.0	128.8	98.5	82.6	80.3
77.5°	81.7	94.9	72.9	61.1	59.3
80°	60.0	73.2	56.6	47.5	47.5
82.5°	41.9	52.5	40.3	35.8	35.8
85°	20.4	25.9	21.5	14.7	13.6
87.5°	5.7	8.7	5.4	4.3	4.5
90°	1.1	3.4	9.1	7.9	9.1
92.5°	19.2	70.2	215.5	70.0	56.1
95°	58.8	170.5	762.7	271.7	176.5
97.5°	106.8	225.0	1308.5	791.6	490.7
100°	140.3	253.2	1514.1	1352.1	896.2
102.5°	178.4	288.6	1491.4	1992.3	1544.4
105°	238.8	340.5	1363.5	2590.6	2461.1
107.5°	298.3	391.7	1238.8	2646.6	2788.9
110°	337.2	428.0	1179.1	2581.4	2845.9



TEST NUMBER: P855066

CATALOG NUMBER: SQ2-PW1-150U-050D-835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	374.4	462.4	1142.9	2468.2	2807.0
115°	430.0	514.1	1107.8	2289.2	2687.5
117.5°	484.1	562.7	1094.4	2113.3	2517.7
120°	519.4	593.6	1090.8	2010.7	2404.6
122.5°	551.1	623.4	1090.8	1922.2	2287.9
125°	598.7	667.2	1091.9	1805.2	2120.6
127.5°	638.9	708.8	1090.6	1719.0	1993.4
130°	664.3	735.0	1089.7	1666.8	1914.7
132.5°	686.9	759.5	1087.0	1621.9	1846.8
135°	720.9	797.1	1082.9	1557.1	1755.1
137.5°	756.6	832.2	1080.4	1489.4	1668.4
140°	781.9	855.0	1079.5	1446.6	1615.9
142.5°	807.2	875.9	1079.5	1401.0	1554.3
145°	843.0	905.0	1080.6	1339.3	1467.7
147.5°	880.5	932.2	1082.2	1285.7	1382.6
150°	904.1	949.5	1084.0	1254.6	1336.4
152.5°	927.6	967.7	1084.9	1228.9	1296.5
155°	960.7	992.8	1087.4	1198.3	1244.7
157.5°	990.3	1013.6	1089.9	1174.2	1207.8
160°	1009.3	1028.2	1090.8	1160.5	1187.0
162.5°	1025.6	1040.9	1090.8	1149.4	1168.9
165°	1048.9	1058.9	1091.9	1134.2	1146.3
167.5°	1068.6	1073.5	1093.3	1122.3	1128.8
170°	1079.5	1081.8	1094.2	1115.8	1118.0
172.5°	1087.6	1089.0	1096.9	1111.2	1111.6
175°	1096.5	1096.5	1097.6	1105.5	1103.3
177.5°	1101.0	1100.1	1099.2	1104.6	1101.0
180°	1101.0	1101.0	1101.0	1101.0	1101.0



TEST NUMBER: P855066

CATALOG NUMBER: SQ2-PW1-150U-050D-835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.80	15.47	15.93	16.59	18.15	11.28	11.96	12.41	13.08	14.63
	3H	16.10	16.71	17.24	17.83	19.41	12.47	13.08	13.61	14.20	15.78
	4H	16.47	17.04	17.62	18.17	19.75	12.91	13.48	14.06	14.61	16.19
	6H	16.66	17.19	17.82	18.32	19.91	13.22	13.74	14.38	14.88	16.46
	8H	16.69	17.19	17.85	18.34	19.92	13.29	13.79	14.45	14.93	16.52
	12H	16.68	17.16	17.84	18.30	19.90	13.29	13.77	14.46	14.91	16.51
4H	2H	14.88	15.45	16.03	16.58	18.15	11.94	12.52	13.10	13.64	15.22
	3H	16.40	16.88	17.57	18.03	19.62	13.31	13.79	14.47	14.94	16.53
	4H	16.91	17.34	18.07	18.49	20.09	13.85	14.29	15.02	15.43	17.04
	6H	17.23	17.60	18.40	18.77	20.37	14.25	14.62	15.41	15.79	17.38
	8H	17.30	17.65	18.47	18.81	20.42	14.35	14.70	15.52	15.85	17.47
	12H	17.31	17.63	18.49	18.79	20.41	14.36	14.68	15.55	15.85	17.47
8H	4H	16.93	17.28	18.10	18.44	20.05	14.17	14.51	15.33	15.67	17.29
	6H	17.36	17.65	18.55	18.85	20.46	14.66	14.95	15.85	16.15	17.76
	8H	17.51	17.75	18.70	18.93	20.57	14.83	15.08	16.02	16.25	17.89
	12H	17.56	17.78	18.76	18.96	20.62	14.88	15.10	16.08	16.27	17.94
12H	4H	16.88	17.20	18.07	18.37	19.99	14.17	14.49	15.36	15.66	17.28
	6H	17.35	17.60	18.54	18.78	20.41	14.73	14.98	15.92	16.16	17.79
	8H	17.51	17.72	18.70	18.90	20.57	14.91	15.13	16.10	16.30	17.97