

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P853681

Luminaire Tested: SQ2-F-075U-050D-935-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P853681
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-13)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-F-075U-050D-935-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5051.1 lumens
Efficiency: N/A
Efficacy: 122.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 41.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P853681
CATALOG NUMBER: SQ2-F-075U-050D-935-UNV-STD-W-4

Luminous Intensity Polar Plot

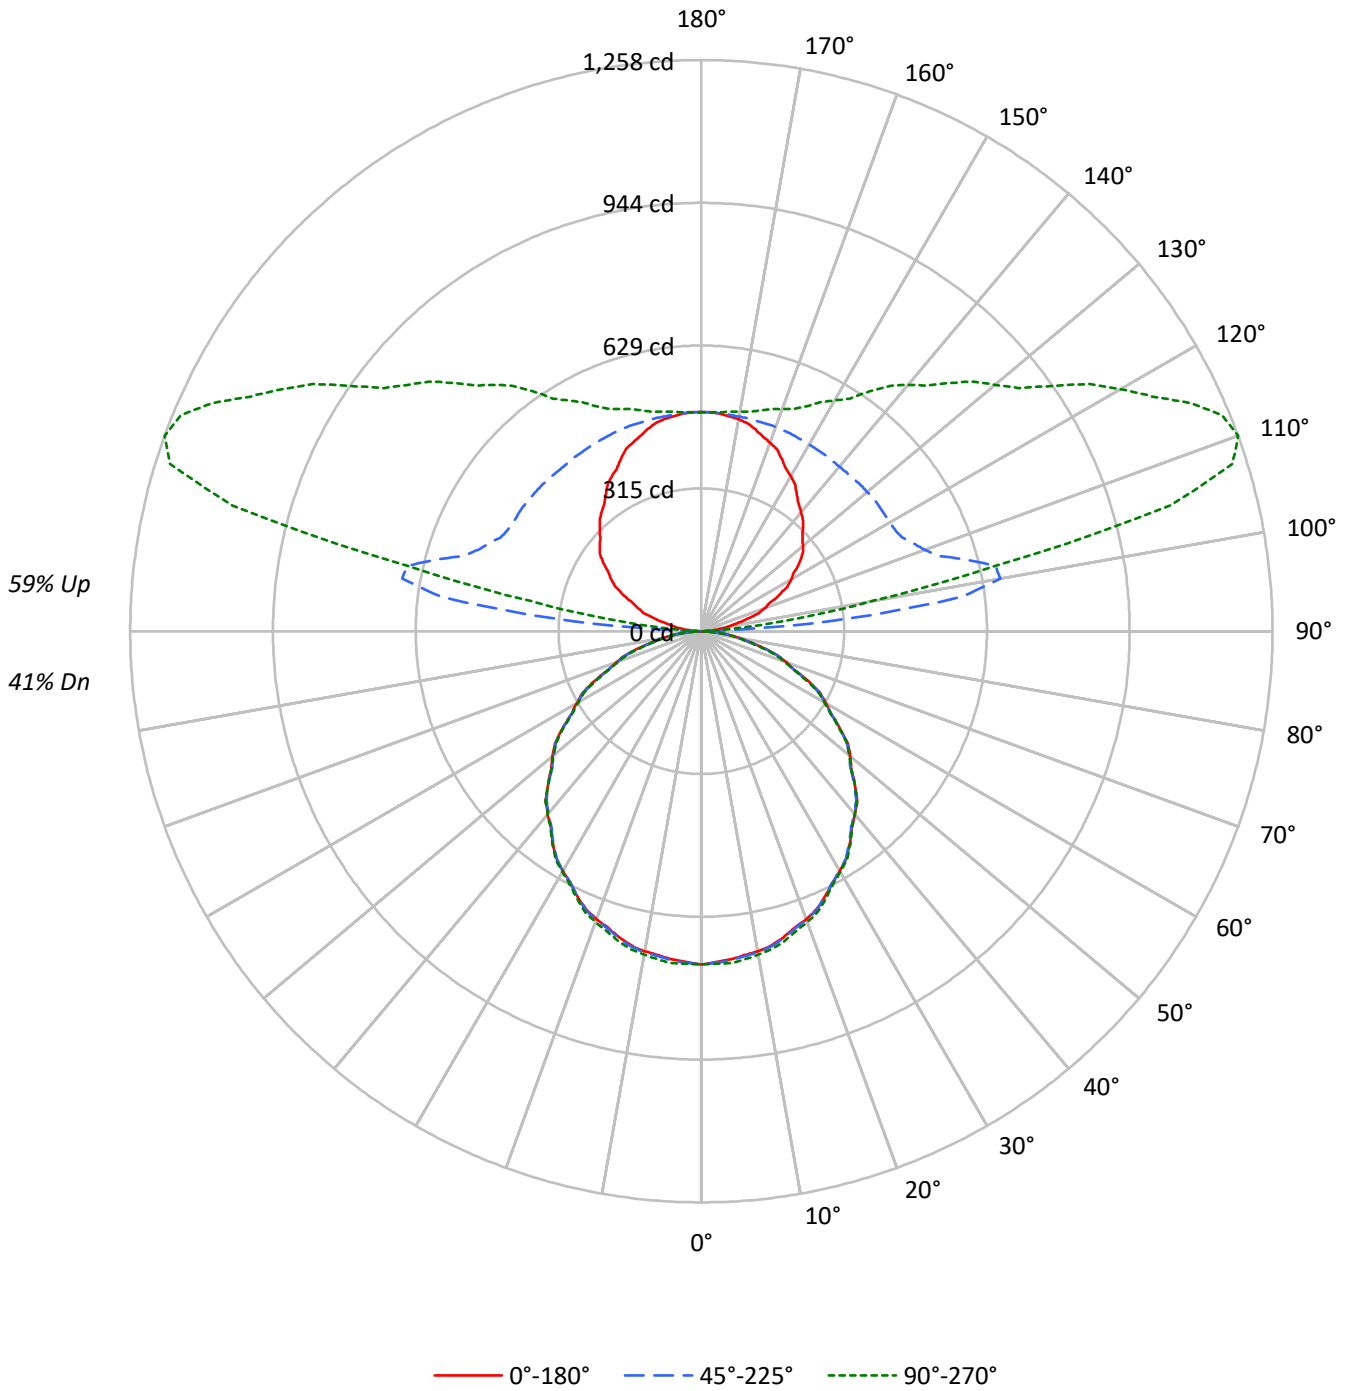



TEST NUMBER: P853681

CATALOG NUMBER: SQ2-F-075U-050D-935-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41				
1	96	91	87	84	87	83	80	77	68	66	64	55	53	52	42	41	40	34				
2	87	80	73	68	79	73	67	63	60	56	53	48	45	43	37	35	33	28				
3	79	70	62	57	72	64	57	52	53	48	44	42	39	36	32	30	28	24				
4	72	62	54	48	66	56	50	44	47	41	37	37	34	31	29	26	24	20				
5	66	55	47	41	60	50	43	38	42	36	32	33	30	27	26	23	21	18				
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	21	18	15				
7	56	44	36	31	51	41	34	29	34	28	24	27	23	20	21	19	16	14				
8	52	40	32	27	47	37	30	25	31	25	22	25	21	18	20	17	15	12				
9	49	36	29	24	44	34	27	22	28	23	19	23	19	16	18	15	13	11				
10	45	33	26	21	41	31	24	20	26	21	17	21	17	15	17	14	12	10				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11851	11851	11851
5°	11767	11799	11896
10°	11739	11772	11854
15°	11667	11701	11818
20°	11598	11615	11718
25°	11491	11491	11562
30°	11373	11373	11410
35°	11235	11196	11274
40°	11086	11044	11086
45°	10914	10869	10914
50°	10751	10650	10675
55°	10500	10472	10415
60°	10236	10172	10107
65°	9933	9819	9704
70°	9347	9300	9111
75°	8796	8609	8359
80°	7810	7624	7345
85°	6299	5743	5372

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 10981 cd/sqm



TEST NUMBER: P853681

CATALOG NUMBER: SQ2-F-075U-050D-935-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.4	1.4
10°-20°	198.2	3.9
20°-30°	298.3	5.9
30°-40°	356.9	7.1
40°-50°	368.2	7.3
50°-60°	332.2	6.6
60°-70°	253.5	5.0
70°-80°	145.7	2.9
80°-90°	38.5	0.8
90°-100°	182.6	3.6
100°-110°	605.5	12.0
110°-120°	600.9	11.9
120°-130°	489.5	9.7
130°-140°	397.8	7.9
140°-150°	308.9	6.1
150°-160°	222.6	4.4
160°-170°	136.3	2.7
170°-180°	46.0	0.9
0°-30°	565.9	11.2
0°-40°	922.8	18.3
0°-60°	1623.2	32.1
0°-90°	2061.0	40.8
90°-120°	1389.0	27.5
90°-150°	2585.2	51.2
90°-180°	2990.0	59.2
0°-180°	5051.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	734	734	734	734	734	
5°	726	736	728	729	734	69
15°	698	707	700	703	707	197
25°	645	652	645	646	649	297
35°	570	574	568	570	572	356
45°	478	481	476	477	478	369
55°	373	375	372	370	370	333
65°	260	259	257	255	254	256
75°	141	140	138	135	134	149
85°	34	32	31	28	29	39
90°	0	1	3	4	4	2
95°	26	77	331	118	79	30
105°	106	151	606	1143	1069	112
115°	189	226	488	1016	1188	187
125°	264	293	479	798	941	235
135°	316	348	475	685	773	245
145°	367	394	474	589	645	230
155°	419	434	477	526	546	193
165°	460	465	479	498	503	130
175°	481	481	482	485	484	46
180°	483	483	483	483	483	



TEST NUMBER: P853681

CATALOG NUMBER: SQ2-F-075U-050D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	734.0	734.0	734.0	734.0	734.0
2.5°	729.2	737.8	730.8	732.4	733.2
5°	726.0	735.8	728.0	729.1	734.0
7.5°	720.0	730.6	722.0	723.9	729.4
10°	716.0	725.8	718.0	719.1	723.0
12.5°	709.6	719.4	711.6	713.5	717.4
15°	698.0	706.8	700.0	703.1	707.0
17.5°	684.6	694.0	686.4	689.1	692.4
20°	675.0	682.8	676.0	677.1	682.0
22.5°	663.0	670.8	664.8	665.1	669.2
25°	645.0	651.8	645.0	646.1	649.0
27.5°	624.4	630.3	624.4	625.5	628.0
30°	610.0	615.9	610.0	611.0	612.0
32.5°	594.0	599.1	593.2	594.3	596.8
35°	570.0	573.9	568.0	570.0	572.0
37.5°	544.4	547.3	542.4	543.4	545.2
40°	526.0	528.9	524.0	525.0	526.0
42.5°	507.6	509.8	504.8	505.8	507.6
45°	478.0	480.9	476.0	477.0	478.0
47.5°	448.0	449.8	445.6	444.8	446.6
50°	428.0	429.0	424.0	424.0	425.0
52.5°	406.4	407.4	404.0	402.4	403.4
55°	373.0	375.0	372.0	370.0	370.0
57.5°	339.4	341.2	337.4	336.4	336.2
60°	317.0	318.0	315.0	314.0	313.0
62.5°	294.6	294.8	291.8	290.8	289.8
65°	260.0	259.0	257.0	255.0	254.0
67.5°	221.2	222.2	220.2	217.0	217.0
70°	198.0	199.0	197.0	193.0	193.0
72.5°	175.6	175.0	173.8	170.6	169.0
75°	141.0	140.0	138.0	135.0	134.0
77.5°	106.4	105.4	104.4	100.6	101.4
80°	84.0	83.0	82.0	79.0	79.0
82.5°	64.0	62.2	61.2	58.2	58.2
85°	34.0	32.0	31.0	28.0	29.0
87.5°	9.6	9.0	8.6	7.2	7.2
90°	0.0	1.0	3.0	4.0	4.0
92.5°	8.0	30.9	91.0	29.5	24.8
95°	26.0	76.8	331.0	118.1	79.0
97.5°	47.8	101.0	577.7	336.9	213.0
100°	63.0	113.8	668.9	574.5	381.0
102.5°	79.8	129.1	663.3	878.0	663.3
105°	106.0	151.0	605.9	1143.2	1068.9
107.5°	132.8	172.9	550.9	1170.1	1226.6
110°	148.0	188.1	522.9	1143.5	1257.8



TEST NUMBER: P853681

CATALOG NUMBER: SQ2-F-075U-050D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	164.0	203.3	506.1	1096.2	1241.8
115°	189.0	226.1	487.9	1015.8	1187.9
117.5°	213.8	246.8	481.3	939.0	1119.5
120°	229.0	261.2	478.9	890.9	1065.9
122.5°	242.6	274.1	478.9	851.4	1013.1
125°	264.0	293.3	478.9	798.1	940.9
127.5°	281.6	310.3	477.7	757.9	879.9
130°	292.0	322.3	476.9	734.4	843.9
132.5°	301.6	332.7	476.1	715.0	813.5
135°	316.0	348.2	474.9	684.9	772.9
137.5°	331.6	362.6	473.7	655.9	733.5
140°	342.0	372.3	472.9	636.5	707.9
142.5°	351.6	381.1	473.7	617.2	680.7
145°	367.0	394.3	473.9	589.2	644.9
147.5°	383.6	406.4	474.1	565.5	606.9
150°	394.0	414.5	474.9	551.7	586.9
152.5°	403.5	423.3	475.7	540.4	568.5
155°	418.9	433.6	476.9	526.4	545.9
157.5°	433.9	445.3	478.1	516.5	530.3
160°	441.9	451.7	478.9	509.2	519.9
162.5°	449.9	457.4	478.9	504.3	512.7
165°	459.9	464.8	478.9	498.0	502.9
167.5°	469.1	471.7	479.9	492.4	494.9
170°	473.9	474.9	479.9	490.0	490.9
172.5°	477.1	478.1	480.7	487.5	487.7
175°	480.9	480.9	481.9	484.9	483.9
177.5°	482.9	482.9	482.1	483.7	482.1
180°	482.9	482.9	482.9	482.9	482.9



TEST NUMBER: P853681

CATALOG NUMBER: SQ2-F-075U-050D-935-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.65	16.44	16.68	17.48	18.88	15.57	16.36	16.60	17.40	18.80
	3H	17.42	18.13	18.46	19.18	20.60	17.30	18.01	18.34	19.06	20.48
	4H	18.08	18.75	19.13	19.80	21.23	17.93	18.60	18.98	19.65	21.07
	6H	18.54	19.16	19.61	20.22	21.65	18.36	18.98	19.42	20.03	21.47
	8H	18.68	19.27	19.75	20.34	21.77	18.48	19.07	19.54	20.14	21.57
	12H	18.75	19.31	19.82	20.38	21.83	18.53	19.09	19.60	20.15	21.61
4H	2H	16.19	16.86	17.25	17.91	19.34	16.13	16.80	17.19	17.85	19.27
	3H	18.17	18.73	19.24	19.81	21.25	18.06	18.63	19.13	19.70	21.14
	4H	18.96	19.47	20.03	20.54	22.00	18.82	19.33	19.89	20.40	21.86
	6H	19.54	19.99	20.63	21.08	22.53	19.36	19.81	20.45	20.90	22.35
	8H	19.73	20.14	20.81	21.23	22.70	19.53	19.94	20.61	21.03	22.49
	12H	19.83	20.20	20.93	21.30	22.77	19.60	19.98	20.70	21.07	22.55
8H	4H	19.20	19.61	20.28	20.70	22.17	19.07	19.49	20.16	20.57	22.04
	6H	19.91	20.26	21.02	21.38	22.85	19.75	20.09	20.85	21.22	22.68
	8H	20.18	20.48	21.29	21.59	23.07	19.99	20.29	21.10	21.40	22.88
	12H	20.35	20.61	21.46	21.71	23.24	20.12	20.38	21.23	21.49	23.01
12H	4H	19.19	19.57	20.29	20.66	22.14	19.07	19.44	20.17	20.54	22.01
	6H	19.96	20.26	21.07	21.37	22.85	19.80	20.10	20.91	21.21	22.69
	8H	20.25	20.51	21.36	21.61	23.14	20.06	20.32	21.18	21.43	22.95