

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854299

Luminaire Tested: SQ2-PW1-100U-100D-935-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P854299  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-12, G2-2308-131-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-PW1-100U-100D-935-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT  
UPLIGHT 1000 LUMENS PER FOOT  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8447.4 lumens  
Efficiency: N/A  
Efficacy: 120.3 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 70.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P854299

CATALOG NUMBER: SQ2-PW1-100U-100D-935-UNV-STD-W-4

### Luminous Intensity Polar Plot

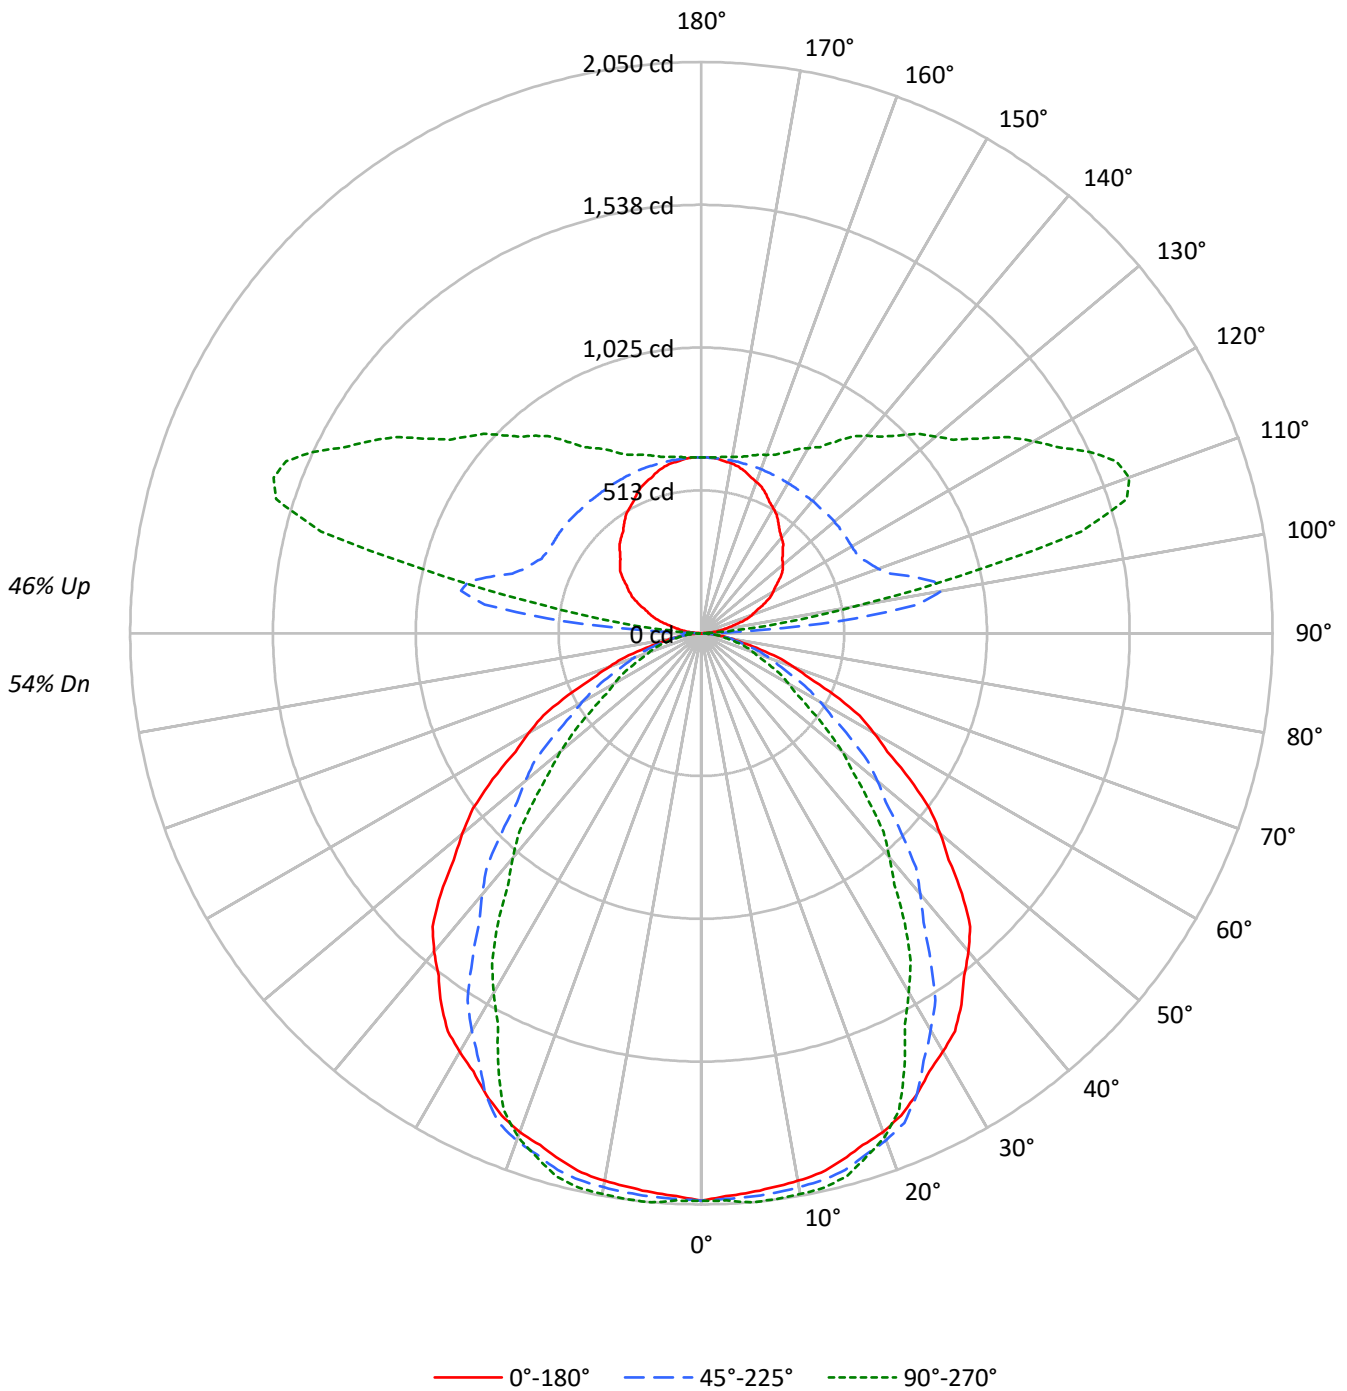



TEST NUMBER: P854299

CATALOG NUMBER: SQ2-PW1-100U-100D-935-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	54		
1	99	95	91	88	92	88	85	82	76	73	71	64	63	61	53	52	51	46		
2	91	84	78	73	84	78	73	69	67	63	60	57	54	52	48	46	44	40		
3	83	74	67	62	77	69	63	58	60	55	51	51	48	45	43	40	38	34		
4	76	66	58	53	71	62	55	50	53	48	44	46	42	39	39	36	33	30		
5	70	59	51	45	65	55	48	43	48	43	38	41	37	34	35	32	30	26		
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	23		
7	60	48	41	35	56	45	38	33	40	34	30	34	30	27	29	26	24	21		
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	19		
9	52	40	33	28	49	38	31	27	33	28	24	29	25	22	25	22	19	17		
10	49	37	30	25	45	35	28	24	31	26	22	27	23	20	23	20	18	16		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	32881	32881	32881
5°	32661	32913	33227
10°	32721	33103	33516
15°	32712	33329	33718
20°	32727	33292	33060
25°	32550	32584	30718
30°	32328	30700	27772
35°	32075	28251	25080
40°	31436	25754	22156
45°	30204	23162	19354
50°	28110	20705	16566
55°	25714	18291	13430
60°	23050	15910	11586
65°	20157	13708	10300
70°	16480	12179	9338
75°	12826	10524	8590
80°	9558	9019	7578
85°	6465	6836	4316

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 30204 cd/sqm



TEST NUMBER: P854299

CATALOG NUMBER: SQ2-PW1-100U-100D-935-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.9	2.3
10°-20°	561.9	6.7
20°-30°	826.9	9.8
30°-40°	904.0	10.7
40°-50°	811.0	9.6
50°-60°	605.0	7.2
60°-70°	382.3	4.5
70°-80°	189.4	2.2
80°-90°	45.5	0.5
90°-100°	263.6	3.1
100°-110°	797.1	9.4
110°-120°	778.2	9.2
120°-130°	635.9	7.5
130°-140°	519.0	6.1
140°-150°	404.0	4.8
150°-160°	291.3	3.4
160°-170°	178.3	2.1
170°-180°	60.2	0.7
0°-30°	1582.7	18.7
0°-40°	2486.7	29.4
0°-60°	3902.7	46.2
0°-90°	4519.9	53.5
90°-120°	1838.8	21.8
90°-150°	3397.8	40.2
90°-180°	3928.0	46.5
0°-180°	8447.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2036	2036	2036	2036	2036	
5°	2015	2048	2031	2033	2050	192
15°	1957	1995	1994	2008	2017	553
25°	1827	1867	1829	1753	1724	841
35°	1627	1610	1433	1308	1272	1015
45°	1323	1217	1014	887	848	1014
55°	914	826	650	509	477	816
65°	528	484	359	289	270	523
75°	206	221	169	142	138	226
85°	35	44	37	25	23	44
90°	0	2	12	7	6	3
95°	33	103	497	184	116	39
105°	139	195	783	1486	1413	146
115°	247	294	633	1310	1539	244
125°	345	382	624	1034	1218	306
135°	413	457	620	892	1004	320
145°	482	518	620	767	839	302
155°	550	568	624	688	714	253
165°	601	608	627	651	659	169
175°	629	629	630	635	633	60
180°	631	631	631	631	631	



TEST NUMBER: P854299

CATALOG NUMBER: SQ2-PW1-100U-100D-935-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2036.5	2036.5	2036.5	2036.5	2036.5
2.5°	2022.6	2048.4	2031.9	2033.6	2038.1
5°	2015.2	2047.5	2030.7	2033.1	2050.1
7.5°	2005.1	2037.7	2025.3	2032.3	2049.0
10°	1995.8	2030.0	2019.1	2029.1	2044.3
12.5°	1983.4	2019.1	2011.3	2022.9	2038.1
15°	1957.0	1995.0	1993.9	2007.7	2017.2
17.5°	1926.4	1964.3	1962.5	1966.1	1970.6
20°	1904.7	1942.6	1937.6	1924.1	1924.1
22.5°	1873.6	1914.6	1901.9	1864.8	1852.7
25°	1827.1	1866.9	1829.0	1752.7	1724.3
27.5°	1772.8	1805.0	1728.9	1620.6	1581.1
30°	1734.0	1758.6	1646.7	1527.5	1489.6
32.5°	1693.6	1703.1	1562.9	1439.0	1398.0
35°	1627.3	1610.2	1433.3	1308.4	1272.4
37.5°	1548.9	1498.1	1308.8	1178.0	1138.1
40°	1491.5	1419.5	1221.9	1091.1	1051.2
42.5°	1427.9	1337.6	1139.7	1008.8	967.5
45°	1322.8	1216.6	1014.4	887.4	847.6
47.5°	1204.5	1099.0	897.2	774.3	740.1
50°	1119.1	1016.7	824.3	701.2	659.5
52.5°	1032.2	940.5	752.9	626.4	569.5
55°	913.5	826.3	649.8	509.4	477.1
57.5°	791.3	715.9	556.3	428.8	402.3
60°	713.8	647.4	492.7	385.4	358.8
62.5°	639.3	580.5	430.6	345.1	323.1
65°	527.6	483.9	358.8	288.6	269.6
67.5°	418.9	394.7	298.3	236.7	224.2
70°	349.1	341.5	258.0	207.3	197.8
72.5°	288.6	291.6	219.2	179.5	173.0
75°	205.6	220.8	168.7	141.5	137.7
77.5°	140.0	162.8	124.9	104.7	101.6
80°	102.8	125.6	97.0	81.5	81.5
82.5°	71.8	90.0	69.0	61.3	61.3
85°	34.9	44.4	36.9	25.2	23.3
87.5°	9.3	14.2	8.6	6.0	5.8
90°	0.0	1.9	11.9	6.9	5.9
92.5°	11.1	44.8	160.9	53.4	38.4
95°	32.7	103.4	497.3	183.7	115.9
97.5°	63.2	131.6	783.8	518.7	315.8
100°	82.2	149.1	875.8	846.7	568.7
102.5°	103.6	168.1	856.8	1187.5	946.7
105°	138.7	194.9	782.7	1486.4	1412.7
107.5°	172.0	225.6	711.3	1515.9	1601.2
110°	194.2	245.5	675.7	1478.7	1633.7



TEST NUMBER: P854299

CATALOG NUMBER: SQ2-PW1-100U-100D-935-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	215.6	265.4	654.3	1416.2	1612.3
115°	246.7	294.1	633.1	1309.9	1538.6
117.5°	277.6	322.5	625.5	1210.4	1444.4
120°	298.2	340.8	623.1	1152.3	1377.1
122.5°	317.2	357.5	623.1	1101.2	1308.9
125°	344.8	382.5	624.1	1034.5	1217.6
127.5°	367.2	406.3	623.1	984.1	1140.3
130°	381.4	422.1	623.1	955.3	1096.7
132.5°	394.1	435.6	622.4	928.9	1059.5
135°	413.1	456.7	620.2	892.2	1003.6
137.5°	434.3	475.8	620.2	853.0	956.2
140°	447.8	488.5	620.2	827.5	925.3
142.5°	461.3	500.4	619.4	804.2	889.6
145°	482.5	518.3	620.2	767.4	839.1
147.5°	503.7	534.1	621.4	737.1	792.2
150°	517.1	545.2	622.2	720.3	766.8
152.5°	529.8	554.8	622.9	705.8	743.8
155°	549.8	568.2	624.1	688.1	714.3
157.5°	567.3	582.2	625.3	675.1	693.3
160°	577.6	590.2	626.1	667.0	680.6
162.5°	587.9	597.4	626.9	659.9	671.1
165°	601.4	608.1	627.1	651.1	658.8
167.5°	612.8	616.3	628.3	644.2	647.5
170°	619.2	621.1	629.1	641.0	642.0
172.5°	623.1	624.3	629.1	637.8	638.0
175°	629.1	629.1	630.1	635.0	633.1
177.5°	631.9	631.1	630.3	632.6	631.1
180°	631.1	631.1	631.1	631.1	631.1



TEST NUMBER: P854299

CATALOG NUMBER: SQ2-PW1-100U-100D-935-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.51	20.36	20.45	21.31	22.53	16.00	16.85	16.93	17.80	19.02
	3H	20.83	21.60	21.78	22.55	23.80	17.20	17.96	18.15	18.92	20.17
	4H	21.21	21.93	22.17	22.89	24.14	17.65	18.37	18.61	19.33	20.59
	6H	21.41	22.07	22.38	23.04	24.31	17.97	18.63	18.94	19.59	20.86
	8H	21.44	22.07	22.42	23.05	24.32	18.04	18.67	19.02	19.65	20.92
	12H	21.44	22.04	22.42	23.01	24.30	18.05	18.65	19.04	19.63	20.92
4H	2H	19.61	20.33	20.58	21.29	22.55	16.68	17.40	17.65	18.36	19.62
	3H	21.16	21.76	22.14	22.75	24.02	18.07	18.66	19.04	19.65	20.92
	4H	21.67	22.21	22.65	23.19	24.49	18.61	19.16	19.60	20.14	21.44
	6H	22.00	22.47	23.00	23.47	24.77	19.02	19.48	20.01	20.49	21.78
	8H	22.08	22.51	23.07	23.51	24.82	19.12	19.56	20.12	20.56	21.87
	12H	22.09	22.49	23.11	23.50	24.81	19.14	19.54	20.16	20.55	21.87
8H	4H	21.71	22.14	22.70	23.14	24.45	18.94	19.38	19.94	20.38	21.68
	6H	22.14	22.50	23.16	23.54	24.85	19.45	19.80	20.47	20.85	22.15
	8H	22.29	22.60	23.32	23.63	24.96	19.61	19.93	20.64	20.95	22.28
	12H	22.35	22.63	23.39	23.65	25.02	19.67	19.95	20.70	20.97	22.34
12H	4H	21.66	22.06	22.68	23.07	24.39	18.95	19.35	19.97	20.36	21.68
	6H	22.13	22.45	23.16	23.48	24.80	19.51	19.83	20.54	20.86	22.18
	8H	22.29	22.57	23.33	23.60	24.96	19.70	19.98	20.73	21.00	22.37