

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854308

Luminaire Tested: SQ2-PW1-125U-075D-935-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854308
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-125U-075D-935-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8354.4 lumens
Efficiency: N/A
Efficacy: 118.3 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 70.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854308

CATALOG NUMBER: SQ2-PW1-125U-075D-935-UNV-STD-W-4

Luminous Intensity Polar Plot

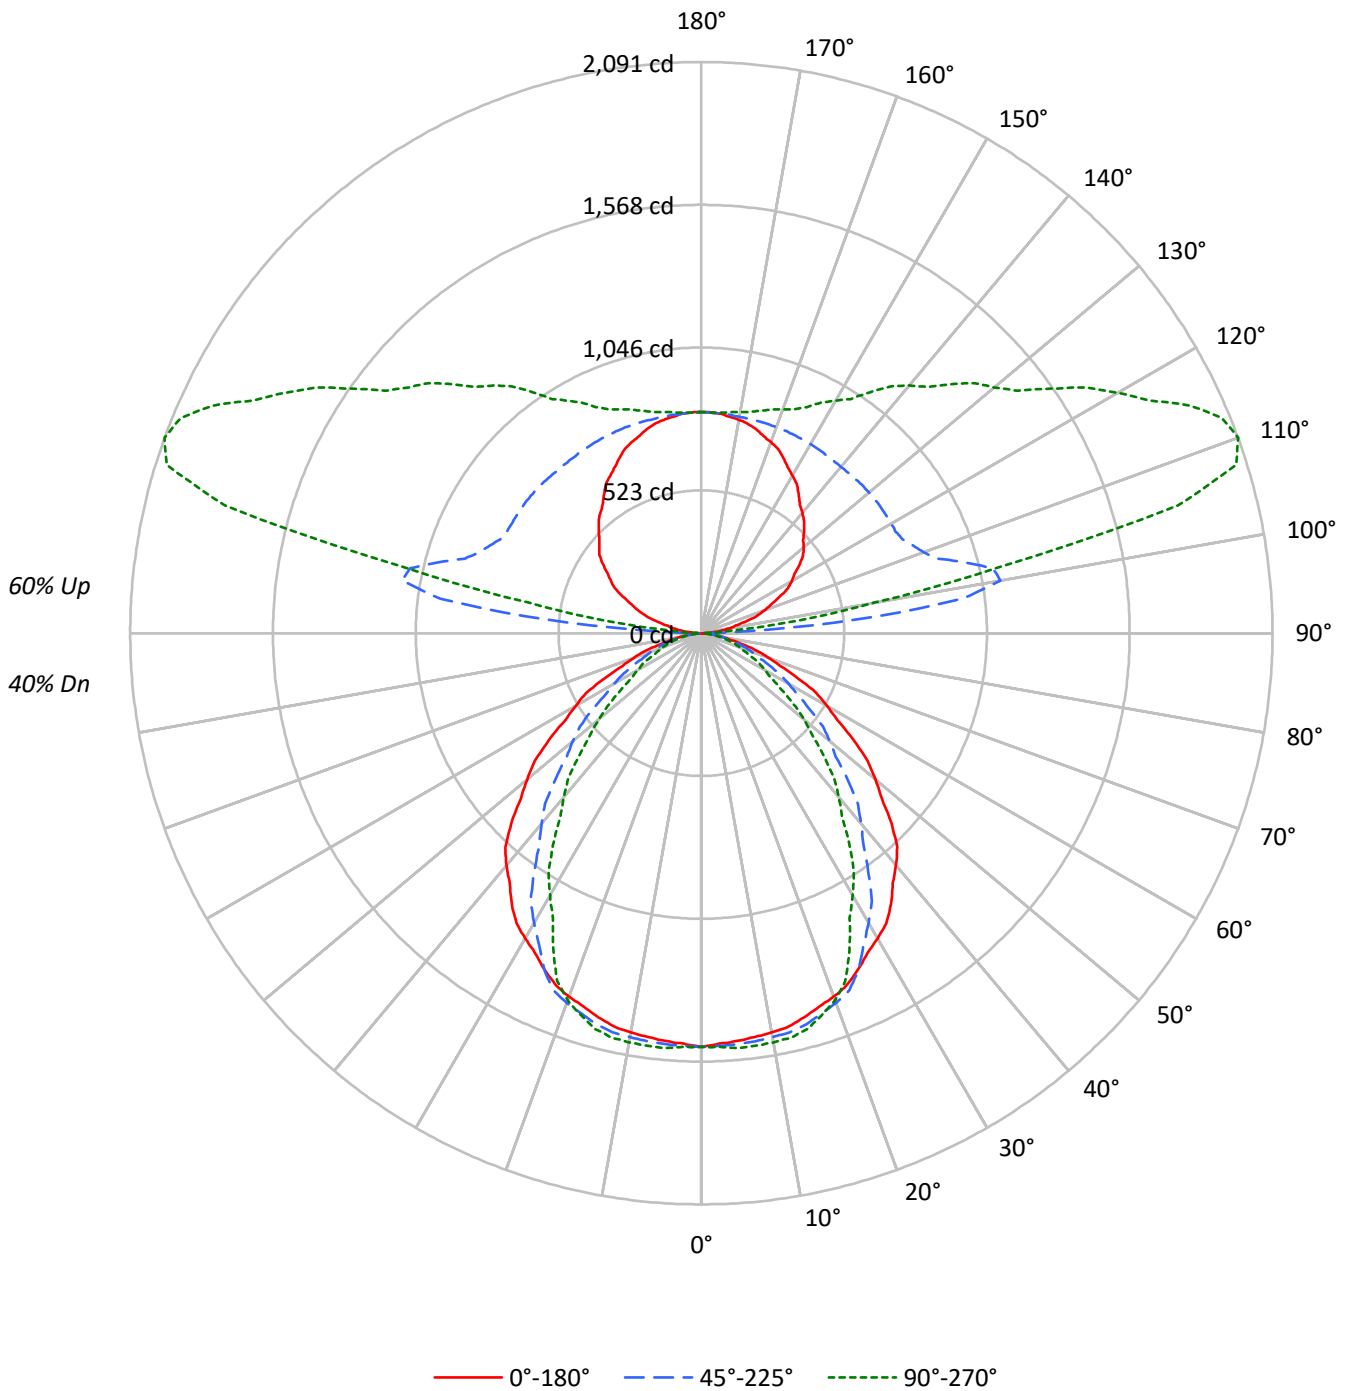



TEST NUMBER: P854308

CATALOG NUMBER: SQ2-PW1-125U-075D-935-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	42	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35	30
3	80	71	64	59	73	65	59	55	54	50	46	44	41	38	34	32	30	26
4	74	63	56	50	67	58	52	47	48	44	40	39	36	33	31	28	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	20
6	62	51	43	38	57	47	40	35	39	34	30	32	28	25	25	23	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	27	23	19	23	19	17	18	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	24456	24456	24456
5°	24292	24480	24713
10°	24337	24620	24928
15°	24331	24789	25078
20°	24340	24761	24588
25°	24209	24235	22848
30°	24045	22835	20655
35°	23856	21013	18652
40°	23381	19155	16480
45°	22464	17228	14394
50°	20909	15400	12321
55°	19128	13605	9990
60°	17144	11832	8619
65°	14991	10197	7660
70°	12260	9059	6944
75°	9538	7829	6388
80°	7113	6704	5635
85°	4817	5076	3205

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22464 cd/sqm



TEST NUMBER: P854308

CATALOG NUMBER: SQ2-PW1-125U-075D-935-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.2	1.7
10°-20°	417.9	5.0
20°-30°	615.0	7.4
30°-40°	672.4	8.0
40°-50°	603.2	7.2
50°-60°	450.0	5.4
60°-70°	284.4	3.4
70°-80°	140.9	1.7
80°-90°	33.9	0.4
90°-100°	309.5	3.7
100°-110°	1007.8	12.1
110°-120°	996.9	11.9
120°-130°	814.6	9.8
130°-140°	665.8	8.0
140°-150°	518.6	6.2
150°-160°	373.8	4.5
160°-170°	228.5	2.7
170°-180°	77.1	0.9
0°-30°	1177.1	14.1
0°-40°	1849.5	22.1
0°-60°	2902.7	34.7
0°-90°	3361.8	40.2
90°-120°	2314.2	27.7
90°-150°	4313.2	51.6
90°-180°	4993.0	59.8
0°-180°	8354.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1515	1515	1515	1515	1515	
5°	1499	1523	1510	1512	1525	143
15°	1456	1484	1483	1493	1500	411
25°	1359	1388	1360	1304	1282	626
35°	1210	1198	1066	973	946	755
45°	984	905	754	660	630	754
55°	680	615	483	379	355	607
65°	392	360	267	215	200	389
75°	153	164	126	105	102	168
85°	26	33	27	19	17	33
90°	0	3	7	6	6	3
95°	42	127	567	202	124	49
105°	171	247	998	1907	1806	183
115°	316	378	813	1676	1972	313
125°	440	490	802	1323	1560	392
135°	532	587	798	1142	1288	411
145°	621	667	796	984	1077	389
155°	709	732	801	881	914	326
165°	773	780	803	833	843	218
175°	806	806	806	812	810	76
180°	809	809	809	809	809	



TEST NUMBER: P854308

CATALOG NUMBER: SQ2-PW1-125U-075D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1514.7	1514.7	1514.7	1514.7	1514.7
2.5°	1504.3	1523.5	1511.3	1512.5	1515.9
5°	1498.8	1522.8	1510.4	1512.1	1524.8
7.5°	1491.3	1515.6	1506.3	1511.5	1523.9
10°	1484.4	1509.8	1501.7	1509.2	1520.5
12.5°	1475.2	1501.7	1496.0	1504.6	1515.9
15°	1455.6	1483.8	1483.0	1493.2	1500.3
17.5°	1432.8	1461.0	1459.6	1462.3	1465.7
20°	1416.6	1444.8	1441.1	1431.0	1431.0
22.5°	1393.5	1424.0	1414.6	1387.0	1378.0
25°	1358.9	1388.5	1360.4	1303.6	1282.5
27.5°	1318.5	1342.5	1285.9	1205.3	1176.0
30°	1289.7	1308.0	1224.8	1136.1	1107.9
32.5°	1259.7	1266.7	1162.4	1070.3	1039.8
35°	1210.3	1197.6	1066.1	973.1	946.3
37.5°	1152.0	1114.2	973.5	876.1	846.5
40°	1109.3	1055.7	908.8	811.5	781.9
42.5°	1062.0	994.9	847.7	750.3	719.6
45°	983.8	904.9	754.5	660.0	630.4
47.5°	895.8	817.4	667.3	575.9	550.5
50°	832.4	756.2	613.1	521.5	490.5
52.5°	767.7	699.5	560.0	465.9	423.5
55°	679.5	614.6	483.3	378.9	354.9
57.5°	588.6	532.4	413.7	318.9	299.2
60°	530.9	481.5	366.4	286.6	266.9
62.5°	475.5	431.7	320.3	256.7	240.3
65°	392.4	359.9	266.9	214.6	200.5
67.5°	311.6	293.5	221.9	176.1	166.8
70°	259.7	254.0	191.9	154.2	147.1
72.5°	214.7	216.9	163.0	133.5	128.7
75°	152.9	164.2	125.5	105.2	102.4
77.5°	104.2	121.1	92.9	77.8	75.6
80°	76.5	93.4	72.1	60.6	60.6
82.5°	53.4	66.9	51.4	45.6	45.6
85°	26.0	33.0	27.4	18.7	17.3
87.5°	6.9	10.9	6.0	4.7	4.7
90°	0.0	2.9	7.0	6.0	6.0
92.5°	14.3	51.5	164.6	54.3	41.8
95°	41.8	127.4	567.3	202.3	124.4
97.5°	78.6	165.8	962.9	586.4	357.9
100°	102.5	188.2	1111.8	991.4	643.0
102.5°	129.6	212.1	1093.5	1466.7	1115.2
105°	171.2	247.1	998.3	1906.7	1805.5
107.5°	216.2	287.6	907.9	1944.9	2052.2
110°	248.8	314.0	864.9	1897.5	2091.2



TEST NUMBER: P854308

CATALOG NUMBER: SQ2-PW1-125U-075D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	275.9	340.3	837.9	1812.0	2061.7
115°	316.5	377.8	813.2	1675.9	1971.7
117.5°	358.3	413.6	803.6	1551.2	1845.7
120°	382.2	436.7	801.2	1474.6	1759.7
122.5°	405.3	459.0	802.0	1408.1	1673.7
125°	439.9	490.5	802.2	1323.2	1559.7
127.5°	469.6	521.4	802.0	1259.6	1456.8
130°	488.7	541.3	801.2	1223.3	1399.4
132.5°	505.4	560.3	800.4	1189.6	1354.8
135°	531.5	587.0	798.3	1142.0	1288.0
137.5°	557.0	612.8	796.1	1093.6	1223.3
140°	575.3	628.8	795.3	1060.8	1183.4
142.5°	592.8	644.0	795.3	1029.5	1138.9
145°	621.1	666.8	796.3	983.5	1076.9
147.5°	648.6	688.3	797.7	944.4	1016.6
150°	666.9	701.9	799.2	921.1	982.4
152.5°	685.2	714.0	800.0	903.3	952.1
155°	708.7	732.0	801.2	880.6	913.7
157.5°	731.0	747.7	802.4	863.9	887.0
160°	744.5	758.1	803.2	853.4	871.9
162.5°	756.4	767.0	803.2	844.6	858.4
165°	773.4	780.2	803.2	833.3	843.0
167.5°	785.3	789.6	803.4	824.8	829.9
170°	793.3	795.2	804.2	819.2	821.1
172.5°	798.9	800.0	805.8	816.0	815.6
175°	806.2	806.2	806.2	812.1	810.2
177.5°	809.2	808.4	807.6	811.5	808.4
180°	809.2	809.2	809.2	809.2	809.2

TEST NUMBER: P854308

CATALOG NUMBER: SQ2-PW1-125U-075D-935-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.18	17.93	18.22	18.97	20.38	13.66	14.41	14.71	15.46	16.86
	3H	18.49	19.16	19.54	20.21	21.64	14.86	15.53	15.91	16.58	18.01
	4H	18.86	19.49	19.92	20.55	21.98	15.30	15.94	16.37	16.99	18.42
	6H	19.06	19.64	20.13	20.70	22.14	15.61	16.20	16.69	17.26	18.70
	8H	19.09	19.64	20.17	20.72	22.16	15.68	16.24	16.76	17.31	18.75
	12H	19.08	19.61	20.16	20.68	22.14	15.69	16.22	16.78	17.29	18.75
4H	2H	17.27	17.90	18.34	18.96	20.39	14.33	14.97	15.40	16.02	17.46
	3H	18.80	19.33	19.88	20.41	21.86	15.71	16.24	16.79	17.32	18.77
	4H	19.30	19.79	20.39	20.86	22.33	16.25	16.73	17.34	17.81	19.28
	6H	19.63	20.05	20.72	21.14	22.60	16.65	17.06	17.74	18.16	19.62
	8H	19.71	20.09	20.80	21.18	22.66	16.75	17.14	17.85	18.23	19.70
	12H	19.72	20.07	20.83	21.17	22.65	16.77	17.12	17.88	18.22	19.70
8H	4H	19.34	19.72	20.43	20.81	22.29	16.57	16.96	17.66	18.05	19.52
	6H	19.77	20.09	20.88	21.22	22.69	17.07	17.39	18.19	18.52	19.99
	8H	19.91	20.19	21.03	21.30	22.80	17.23	17.51	18.36	18.63	20.12
	12H	19.98	20.22	21.10	21.33	22.86	17.29	17.54	18.41	18.64	20.18
12H	4H	19.29	19.64	20.40	20.74	22.22	16.58	16.93	17.69	18.03	19.51
	6H	19.76	20.04	20.88	21.15	22.64	17.14	17.42	18.26	18.53	20.02
	8H	19.92	20.16	21.04	21.27	22.80	17.32	17.56	18.44	18.67	20.20