

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854380

Luminaire Tested: SQ2-WBM-100U-075D-935-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854380
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-12, G3-2104-222-6)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-WBM-100U-075D-935-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7211.3 lumens
Efficiency: N/A
Efficacy: 119.8 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.18 / 1.17
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854380

CATALOG NUMBER: SQ2-WBM-100U-075D-935-UNV-STD-W-4

Luminous Intensity Polar Plot

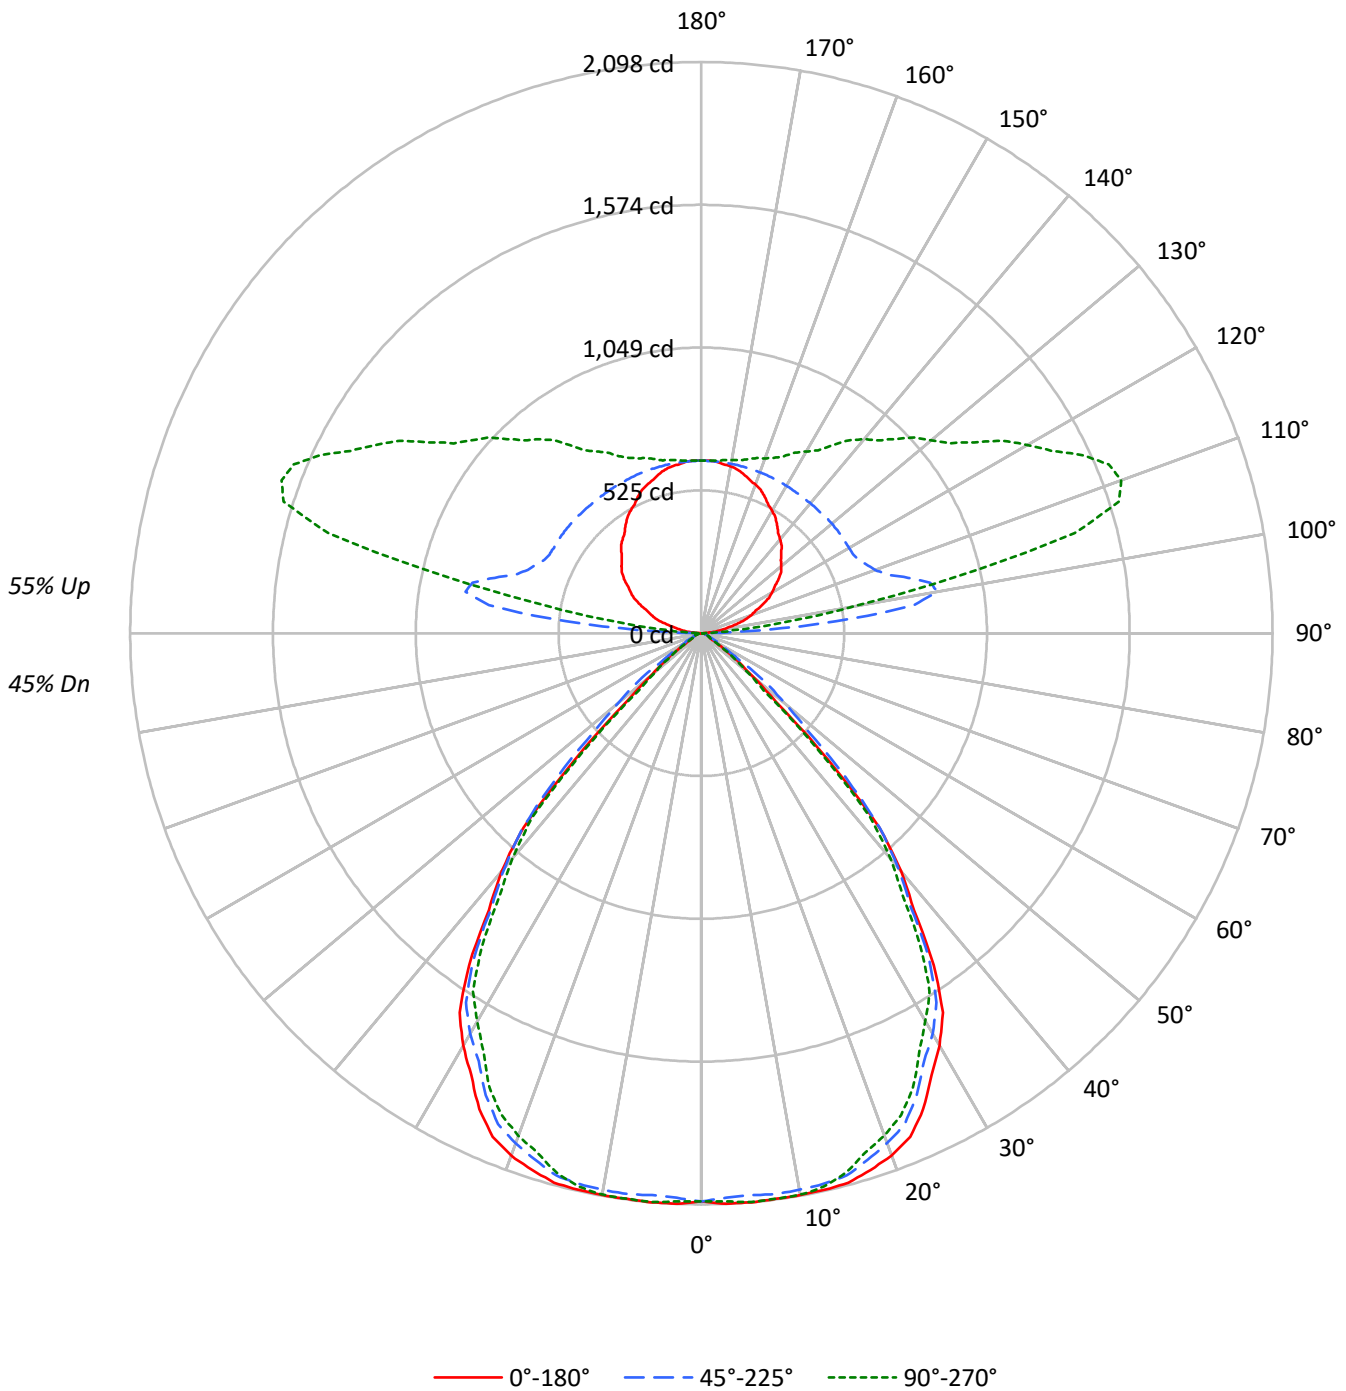



TEST NUMBER: P854380

CATALOG NUMBER: SQ2-WBM-100U-075D-935-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45				
1	98	95	91	88	90	87	84	82	73	71	69	60	59	58	48	48	47	41				
2	91	85	79	75	83	78	74	70	66	63	60	55	53	51	45	43	42	37				
3	84	76	70	65	77	70	65	61	60	56	53	50	48	45	41	39	38	34				
4	78	68	62	56	72	64	58	53	54	50	47	46	43	40	38	36	34	31				
5	72	62	55	50	66	58	51	47	50	45	41	42	39	36	35	33	31	28				
6	67	56	49	44	62	53	46	42	45	41	37	39	35	33	33	30	28	25				
7	62	51	44	39	58	48	42	37	42	37	33	36	32	30	30	28	26	23				
8	58	47	40	35	54	44	38	33	38	34	30	33	29	27	28	26	24	21				
9	54	43	36	32	50	41	34	30	35	31	27	31	27	25	26	24	22	20				
10	51	40	33	29	47	37	32	28	33	28	25	29	25	22	24	22	20	18				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	33700	33700	33700
5°	34007	33585	33990
10°	34351	34023	34334
15°	34922	34471	34302
20°	35087	34263	33747
25°	34367	33350	32797
30°	32608	31674	30667
35°	29325	28714	27670
40°	24040	23682	22776
45°	15034	17112	14118
50°	5880	9977	5378
55°	2902	4647	2874
60°	1356	2228	1227
65°	1223	1299	1146
70°	1180	1227	1133
75°	1185	1185	1061
80°	1116	1116	1023
85°	1112	926	926

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 17112 cd/sqm



TEST NUMBER: P854380

CATALOG NUMBER: SQ2-WBM-100U-075D-935-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	199.6	2.8
10°-20°	583.5	8.1
20°-30°	862.7	12.0
30°-40°	892.7	12.4
40°-50°	536.9	7.4
50°-60°	128.5	1.8
60°-70°	35.1	0.5
70°-80°	19.6	0.3
80°-90°	7.3	0.1
90°-100°	264.7	3.7
100°-110°	800.7	11.1
110°-120°	781.7	10.8
120°-130°	638.8	8.9
130°-140°	521.4	7.2
140°-150°	405.9	5.6
150°-160°	292.6	4.1
160°-170°	179.1	2.5
170°-180°	60.5	0.8
0°-30°	1645.8	22.8
0°-40°	2538.4	35.2
0°-60°	3203.9	44.4
0°-90°	3266.0	45.3
90°-120°	1847.1	25.6
90°-150°	3413.2	47.3
90°-180°	3945.0	54.7
0°-180°	7211.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2087	2087	2087	2087	2087	
5°	2098	2091	2072	2100	2097	200
15°	2089	2105	2062	2062	2052	589
25°	1929	1945	1872	1852	1841	882
35°	1488	1486	1457	1423	1404	913
45°	658	747	749	712	618	509
55°	103	116	165	110	102	103
65°	32	33	34	32	30	32
75°	19	19	19	18	17	20
85°	6	6	5	5	5	6
90°	0	2	12	7	6	2
95°	33	104	500	185	116	39
105°	139	196	786	1493	1419	146
115°	248	296	636	1316	1546	245
125°	346	384	627	1039	1223	308
135°	415	459	623	896	1008	321
145°	485	521	623	771	843	304
155°	552	571	627	691	718	254
165°	604	611	630	654	662	170
175°	632	632	633	638	636	60
180°	634	634	634	634	634	



TEST NUMBER: P854380

CATALOG NUMBER: SQ2-WBM-100U-075D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2087.2	2087.2	2087.2	2087.2	2087.2
2.5°	2097.6	2092.1	2075.2	2092.7	2088.8
5°	2098.2	2091.3	2072.2	2100.1	2097.2
7.5°	2096.0	2093.0	2078.4	2099.5	2095.0
10°	2095.2	2096.1	2075.2	2097.1	2094.2
12.5°	2094.4	2102.4	2072.0	2089.0	2082.2
15°	2089.2	2104.8	2062.2	2061.9	2052.1
17.5°	2067.0	2085.5	2028.5	2012.9	2000.9
20°	2042.1	2060.7	1994.1	1969.0	1964.1
22.5°	2002.9	2023.1	1951.7	1924.1	1916.1
25°	1929.1	1944.7	1872.0	1851.8	1841.0
27.5°	1830.6	1839.2	1771.0	1747.8	1733.0
30°	1749.0	1752.9	1698.9	1668.4	1644.9
32.5°	1652.1	1656.0	1608.5	1579.7	1560.9
35°	1487.8	1485.9	1456.8	1423.4	1403.8
37.5°	1282.3	1285.1	1262.1	1235.6	1215.9
40°	1140.6	1142.6	1123.6	1085.5	1080.6
42.5°	967.7	997.1	971.5	941.8	918.9
45°	658.4	747.4	749.4	712.3	618.3
47.5°	371.8	473.2	531.7	425.0	311.0
50°	234.1	302.6	397.2	252.3	214.1
52.5°	166.1	200.9	299.6	177.4	157.3
55°	103.1	115.8	165.1	109.9	102.1
57.5°	61.2	74.3	93.9	74.4	62.0
60°	42.0	52.8	69.0	48.8	38.0
62.5°	36.4	40.9	54.6	38.5	34.8
65°	32.0	33.0	34.0	32.0	30.0
67.5°	28.2	29.2	28.4	28.2	26.4
70°	25.0	26.0	26.0	25.0	24.0
72.5°	22.6	23.6	22.8	22.6	20.8
75°	19.0	19.0	19.0	18.0	17.0
77.5°	14.4	15.4	14.4	14.4	13.4
80°	12.0	13.0	12.0	12.0	11.0
82.5°	9.6	9.8	9.6	9.6	8.6
85°	6.0	6.0	5.0	5.0	5.0
87.5°	1.6	2.8	4.0	3.0	2.8
90°	0.0	1.9	11.9	6.9	6.0
92.5°	11.1	45.0	161.6	53.6	38.6
95°	32.8	103.9	499.6	184.6	116.4
97.5°	63.5	132.2	787.4	521.0	317.3
100°	82.6	149.7	879.7	850.5	571.2
102.5°	104.1	168.9	860.6	1192.9	951.0
105°	139.3	195.8	786.2	1493.1	1419.1
107.5°	172.8	226.7	714.5	1522.8	1608.4
110°	195.1	246.6	678.7	1485.4	1641.0



TEST NUMBER: P854380

CATALOG NUMBER: SQ2-WBM-100U-075D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	216.6	266.6	657.2	1422.6	1619.6
115°	247.8	295.5	635.9	1315.9	1545.5
117.5°	278.8	324.0	628.4	1215.9	1451.0
120°	299.5	342.4	626.0	1157.5	1383.3
122.5°	318.7	359.1	626.0	1106.2	1314.8
125°	346.3	384.3	627.0	1039.2	1223.1
127.5°	368.8	408.1	626.0	988.6	1145.4
130°	383.1	424.0	626.0	959.6	1101.7
132.5°	395.9	437.5	625.2	933.1	1064.2
135°	415.0	458.8	623.0	896.2	1008.1
137.5°	436.3	477.9	623.0	856.8	960.5
140°	449.8	490.7	623.0	831.2	929.5
142.5°	463.4	502.7	622.2	807.8	893.7
145°	484.7	520.7	623.0	770.9	842.9
147.5°	505.9	536.5	624.2	740.5	795.7
150°	519.5	547.7	625.0	723.6	770.3
152.5°	532.2	557.3	625.8	709.0	747.2
155°	552.3	570.8	627.0	691.2	717.5
157.5°	569.8	584.8	628.2	678.1	696.4
160°	580.2	592.8	629.0	670.1	683.7
162.5°	590.5	600.1	629.7	662.8	674.1
165°	604.1	610.9	629.9	654.0	661.8
167.5°	615.6	619.1	631.1	647.1	650.4
170°	622.0	623.9	631.9	643.9	644.9
172.5°	626.0	627.1	631.9	640.7	640.9
175°	631.9	631.9	632.9	637.9	635.9
177.5°	634.7	633.9	633.1	635.5	633.9
180°	633.9	633.9	633.9	633.9	633.9



TEST NUMBER: P854380

CATALOG NUMBER: SQ2-WBM-100U-075D-935-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.65	5.35	5.68	6.36	7.71	4.31	5.01	5.34	6.02	7.37
	3H	5.15	5.77	6.19	6.79	8.16	4.82	5.43	5.85	6.46	7.83
	4H	5.41	6.00	6.46	7.02	8.40	5.06	5.64	6.10	6.66	8.04
	6H	5.64	6.18	6.70	7.21	8.59	5.26	5.80	6.32	6.83	8.21
	8H	5.72	6.22	6.78	7.27	8.65	5.33	5.83	6.39	6.88	8.26
	12H	5.77	6.25	6.83	7.29	8.69	5.36	5.84	6.42	6.87	8.28
4H	2H	4.66	5.24	5.71	6.26	7.64	4.34	4.92	5.40	5.95	7.33
	3H	5.36	5.84	6.42	6.90	8.29	5.06	5.54	6.12	6.60	7.99
	4H	5.76	6.20	6.83	7.25	8.66	5.44	5.88	6.50	6.92	8.33
	6H	6.14	6.51	7.21	7.58	8.99	5.78	6.16	6.86	7.23	8.63
	8H	6.28	6.63	7.35	7.69	9.11	5.90	6.25	6.98	7.31	8.73
	12H	6.37	6.69	7.46	7.76	9.19	5.97	6.28	7.06	7.36	8.78
8H	4H	5.85	6.20	6.92	7.26	8.68	5.55	5.90	6.62	6.96	8.38
	6H	6.35	6.64	7.45	7.74	9.16	6.02	6.31	7.11	7.41	8.83
	8H	6.58	6.83	7.68	7.92	9.36	6.22	6.47	7.32	7.56	8.99
	12H	6.76	6.98	7.86	8.06	9.54	6.35	6.57	7.46	7.65	9.13
12H	4H	5.82	6.13	6.90	7.20	8.63	5.52	5.84	6.61	6.91	8.34
	6H	6.37	6.62	7.47	7.71	9.15	6.05	6.30	7.15	7.39	8.82
	8H	6.62	6.84	7.73	7.92	9.40	6.27	6.49	7.37	7.57	9.05