

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P853705

Luminaire Tested: SQ2-F-100U-050D-840-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P853705
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-12, G2-2308-131-13)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-F-100U-050D-840-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7021.5 lumens
Efficiency: N/A
Efficacy: 139.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 50.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P853705
CATALOG NUMBER: SQ2-F-100U-050D-840-UNV-STD-W-4

Luminous Intensity Polar Plot

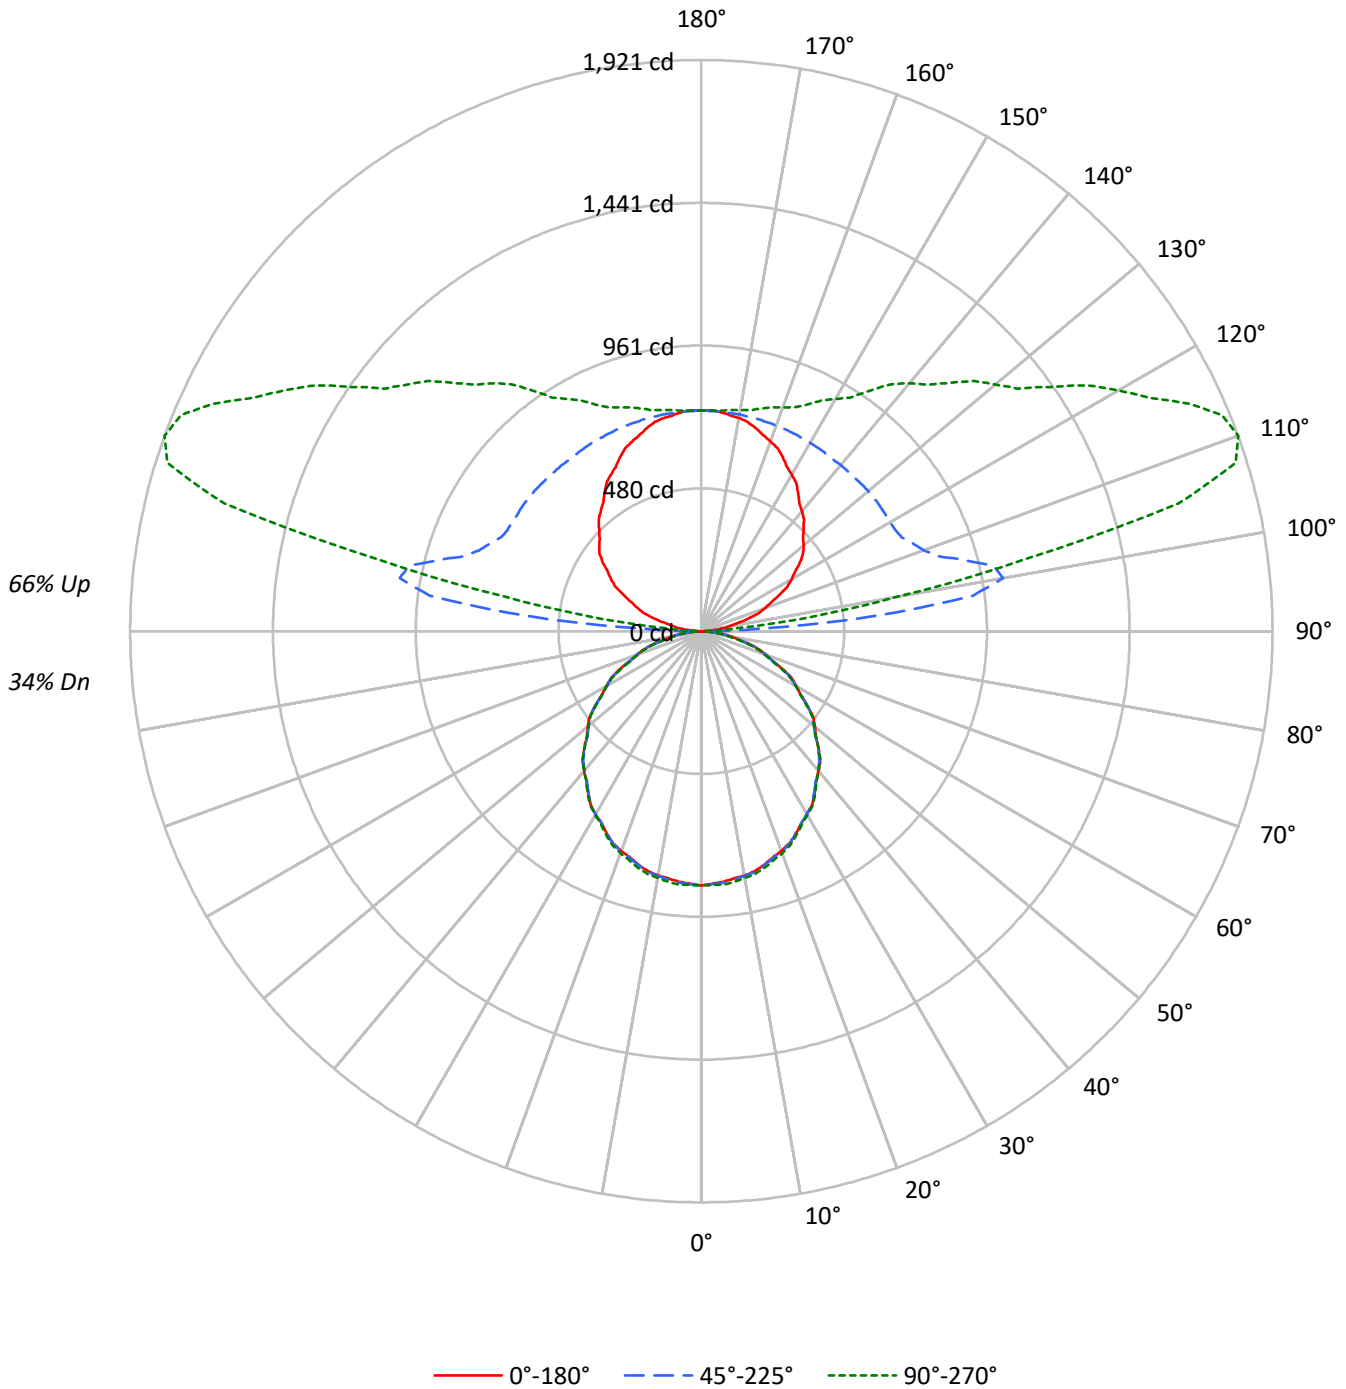



TEST NUMBER: P853705

CATALOG NUMBER: SQ2-F-100U-050D-840-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	75	75	75	57	57	57	42	42	42	34
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	37	36	35	29
2	86	78	72	67	77	71	66	61	57	53	50	44	42	39	32	31	29	24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	40	34	31	31	27	24	23	20	18	15
6	60	48	40	35	54	44	37	32	35	30	26	28	24	21	20	18	16	13
7	55	43	36	30	50	39	33	28	32	27	23	25	21	19	19	16	14	11
8	51	39	32	26	46	36	29	24	29	24	20	23	19	17	17	15	13	10
9	48	36	28	23	43	33	26	22	27	22	18	21	17	15	16	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	15	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13811	13811	13811
5°	13713	13750	13864
10°	13680	13719	13814
15°	13598	13636	13772
20°	13515	13536	13656
25°	13392	13392	13473
30°	13254	13254	13297
35°	13094	13046	13139
40°	12920	12872	12920
45°	12721	12666	12721
50°	12529	12411	12441
55°	12237	12203	12138
60°	11929	11854	11780
65°	11576	11442	11308
70°	10891	10839	10617
75°	10249	10031	9744
80°	9103	8889	8563
85°	7336	6688	6262

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 12796 cd/sqm



TEST NUMBER: P853705

CATALOG NUMBER: SQ2-F-100U-050D-840-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.9	1.2
10°-20°	231.0	3.3
20°-30°	347.6	5.0
30°-40°	415.9	5.9
40°-50°	429.1	6.1
50°-60°	387.1	5.5
60°-70°	295.4	4.2
70°-80°	169.8	2.4
80°-90°	45.6	0.6
90°-100°	310.0	4.4
100°-110°	937.4	13.4
110°-120°	915.1	13.0
120°-130°	747.8	10.6
130°-140°	610.4	8.7
140°-150°	475.2	6.8
150°-160°	342.6	4.9
160°-170°	209.7	3.0
170°-180°	70.8	1.0
0°-30°	659.5	9.4
0°-40°	1075.4	15.3
0°-60°	1891.7	26.9
0°-90°	2402.6	34.2
90°-120°	2162.5	30.8
90°-150°	3995.9	56.9
90°-180°	4619.0	65.8
0°-180°	7021.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	855	855	855	855	855	
5°	846	858	848	850	855	80
15°	814	824	816	819	824	229
25°	752	760	752	753	756	346
35°	664	669	662	664	667	415
45°	557	560	555	556	557	430
55°	435	437	434	431	431	389
65°	303	302	300	297	296	298
75°	164	163	161	157	156	173
85°	40	37	36	33	34	46
90°	0	2	14	8	7	3
95°	38	122	585	216	136	46
105°	163	229	920	1748	1661	171
115°	290	346	744	1540	1809	287
125°	405	450	734	1217	1432	360
135°	486	537	729	1049	1180	376
145°	567	610	729	902	987	355
155°	647	668	734	809	840	298
165°	707	715	738	766	775	199
175°	740	740	741	747	744	70
180°	742	742	742	742	742	



TEST NUMBER: P853705

CATALOG NUMBER: SQ2-F-100U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	855.4	855.4	855.4	855.4	855.4
2.5°	849.8	859.8	851.7	853.5	854.5
5°	846.1	857.5	848.4	849.7	855.4
7.5°	839.1	851.4	841.4	843.6	850.0
10°	834.4	845.8	836.8	838.0	842.6
12.5°	827.0	838.4	829.3	831.5	836.1
15°	813.5	823.7	815.8	819.4	823.9
17.5°	797.8	808.8	799.9	803.1	806.9
20°	786.6	795.7	787.8	789.1	794.8
22.5°	772.7	781.8	774.8	775.1	779.9
25°	751.7	759.6	751.7	753.0	756.3
27.5°	727.7	734.6	727.7	729.0	731.9
30°	710.9	717.8	710.9	712.1	713.2
32.5°	692.2	698.2	691.3	692.6	695.5
35°	664.3	668.8	661.9	664.3	666.6
37.5°	634.4	637.8	632.1	633.3	635.4
40°	613.0	616.4	610.7	611.8	613.0
42.5°	591.6	594.1	588.3	589.5	591.6
45°	557.1	560.4	554.7	555.9	557.1
47.5°	522.1	524.2	519.3	518.4	520.5
50°	498.8	500.0	494.1	494.1	495.3
52.5°	473.6	474.8	470.8	469.0	470.1
55°	434.7	437.0	433.5	431.2	431.2
57.5°	395.5	397.6	393.2	392.0	391.8
60°	369.4	370.6	367.1	365.9	364.8
62.5°	343.3	343.6	340.1	338.9	337.7
65°	303.0	301.8	299.5	297.2	296.0
67.5°	257.8	259.0	256.6	252.9	252.9
70°	230.7	231.9	229.6	224.9	224.9
72.5°	204.6	203.9	202.5	198.8	197.0
75°	164.3	163.2	160.8	157.3	156.2
77.5°	124.0	122.8	121.7	117.2	118.2
80°	97.9	96.7	95.6	92.1	92.1
82.5°	74.6	72.5	71.3	67.8	67.8
85°	39.6	37.3	36.1	32.6	33.8
87.5°	11.2	10.7	12.1	9.1	8.9
90°	0.0	2.3	14.0	8.2	7.0
92.5°	13.1	52.7	189.3	62.7	45.2
95°	38.5	121.6	584.9	216.1	136.4
97.5°	74.4	154.8	921.8	610.0	371.4
100°	96.7	175.3	1030.0	995.7	668.7
102.5°	121.9	197.8	1007.6	1396.6	1113.3
105°	163.2	229.2	920.4	1748.0	1661.4
107.5°	202.3	265.4	836.5	1782.7	1883.1
110°	228.3	288.8	794.6	1739.0	1921.3



TEST NUMBER: P853705

CATALOG NUMBER: SQ2-F-100U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	253.5	312.1	769.4	1665.5	1896.1
115°	290.1	345.9	744.5	1540.5	1809.4
117.5°	326.4	379.3	735.6	1423.4	1698.7
120°	350.7	400.8	732.8	1355.1	1619.4
122.5°	373.0	420.5	732.8	1295.1	1539.3
125°	405.4	449.8	734.0	1216.6	1431.9
127.5°	431.8	477.8	732.8	1157.4	1341.0
130°	448.6	496.5	732.8	1123.4	1289.7
132.5°	463.5	512.2	731.9	1092.3	1245.9
135°	485.9	537.1	729.3	1049.2	1180.2
137.5°	510.8	559.5	729.3	1003.1	1124.5
140°	526.6	574.4	729.3	973.1	1088.3
142.5°	542.5	588.5	728.4	945.7	1046.3
145°	567.4	609.5	729.3	902.5	986.9
147.5°	592.4	628.2	730.7	866.9	931.6
150°	608.2	641.2	731.6	847.1	901.8
152.5°	623.1	652.5	732.6	830.1	874.8
155°	646.7	668.2	734.0	809.3	840.0
157.5°	667.1	684.7	735.4	793.9	815.3
160°	679.2	694.1	736.3	784.4	800.4
162.5°	691.3	702.5	737.2	776.0	789.2
165°	707.2	715.2	737.5	765.7	774.8
167.5°	720.7	724.9	738.9	757.6	761.5
170°	728.1	730.5	739.8	753.8	754.9
172.5°	732.8	734.2	739.8	750.1	750.3
175°	739.8	739.8	741.0	746.8	744.5
177.5°	743.1	742.1	741.2	744.0	742.1
180°	742.1	742.1	742.1	742.1	742.1



TEST NUMBER: P853705

CATALOG NUMBER: SQ2-F-100U-050D-840-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.43	16.17	16.51	17.25	18.73	15.35	16.09	16.43	17.17	18.65
	3H	17.20	17.86	18.29	18.95	20.45	17.08	17.74	18.17	18.83	20.33
	4H	17.85	18.48	18.95	19.57	21.08	17.70	18.33	18.80	19.42	20.93
	6H	18.31	18.90	19.42	19.99	21.51	18.13	18.71	19.24	19.81	21.32
	8H	18.45	19.00	19.56	20.11	21.62	18.25	18.80	19.36	19.91	21.42
	12H	18.52	19.04	19.64	20.15	21.68	18.30	18.82	19.41	19.93	21.46
4H	2H	15.96	16.60	17.07	17.69	19.19	15.90	16.53	17.01	17.62	19.13
	3H	17.94	18.47	19.05	19.59	21.10	17.83	18.36	18.95	19.48	20.99
	4H	18.72	19.21	19.84	20.32	21.85	18.58	19.07	19.70	20.17	21.71
	6H	19.31	19.72	20.43	20.85	22.38	19.13	19.54	20.25	20.67	22.20
	8H	19.49	19.88	20.62	21.00	22.55	19.29	19.68	20.42	20.80	22.35
	12H	19.59	19.94	20.73	21.07	22.62	19.36	19.71	20.50	20.85	22.40
8H	4H	18.96	19.35	20.09	20.47	22.02	18.84	19.22	19.96	20.35	21.89
	6H	19.67	19.99	20.82	21.16	22.70	19.51	19.83	20.66	20.99	22.54
	8H	19.94	20.22	21.09	21.36	22.93	19.75	20.03	20.90	21.17	22.73
	12H	20.10	20.35	21.26	21.49	23.09	19.88	20.12	21.03	21.26	22.86
12H	4H	18.95	19.30	20.09	20.44	21.99	18.83	19.18	19.97	20.32	21.86
	6H	19.72	20.00	20.87	21.14	22.70	19.56	19.84	20.71	20.98	22.54
	8H	20.00	20.25	21.16	21.39	22.99	19.82	20.06	20.97	21.21	22.80