

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855470

Luminaire Tested: SQ2-F-125U-125D-840-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855470
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-13)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-F-125U-125D-840-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11572.4 lumens
Efficiency: N/A
Efficacy: 124.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 93.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855470
CATALOG NUMBER: SQ2-F-125U-125D-840-UNV-STD-W-4

Luminous Intensity Polar Plot

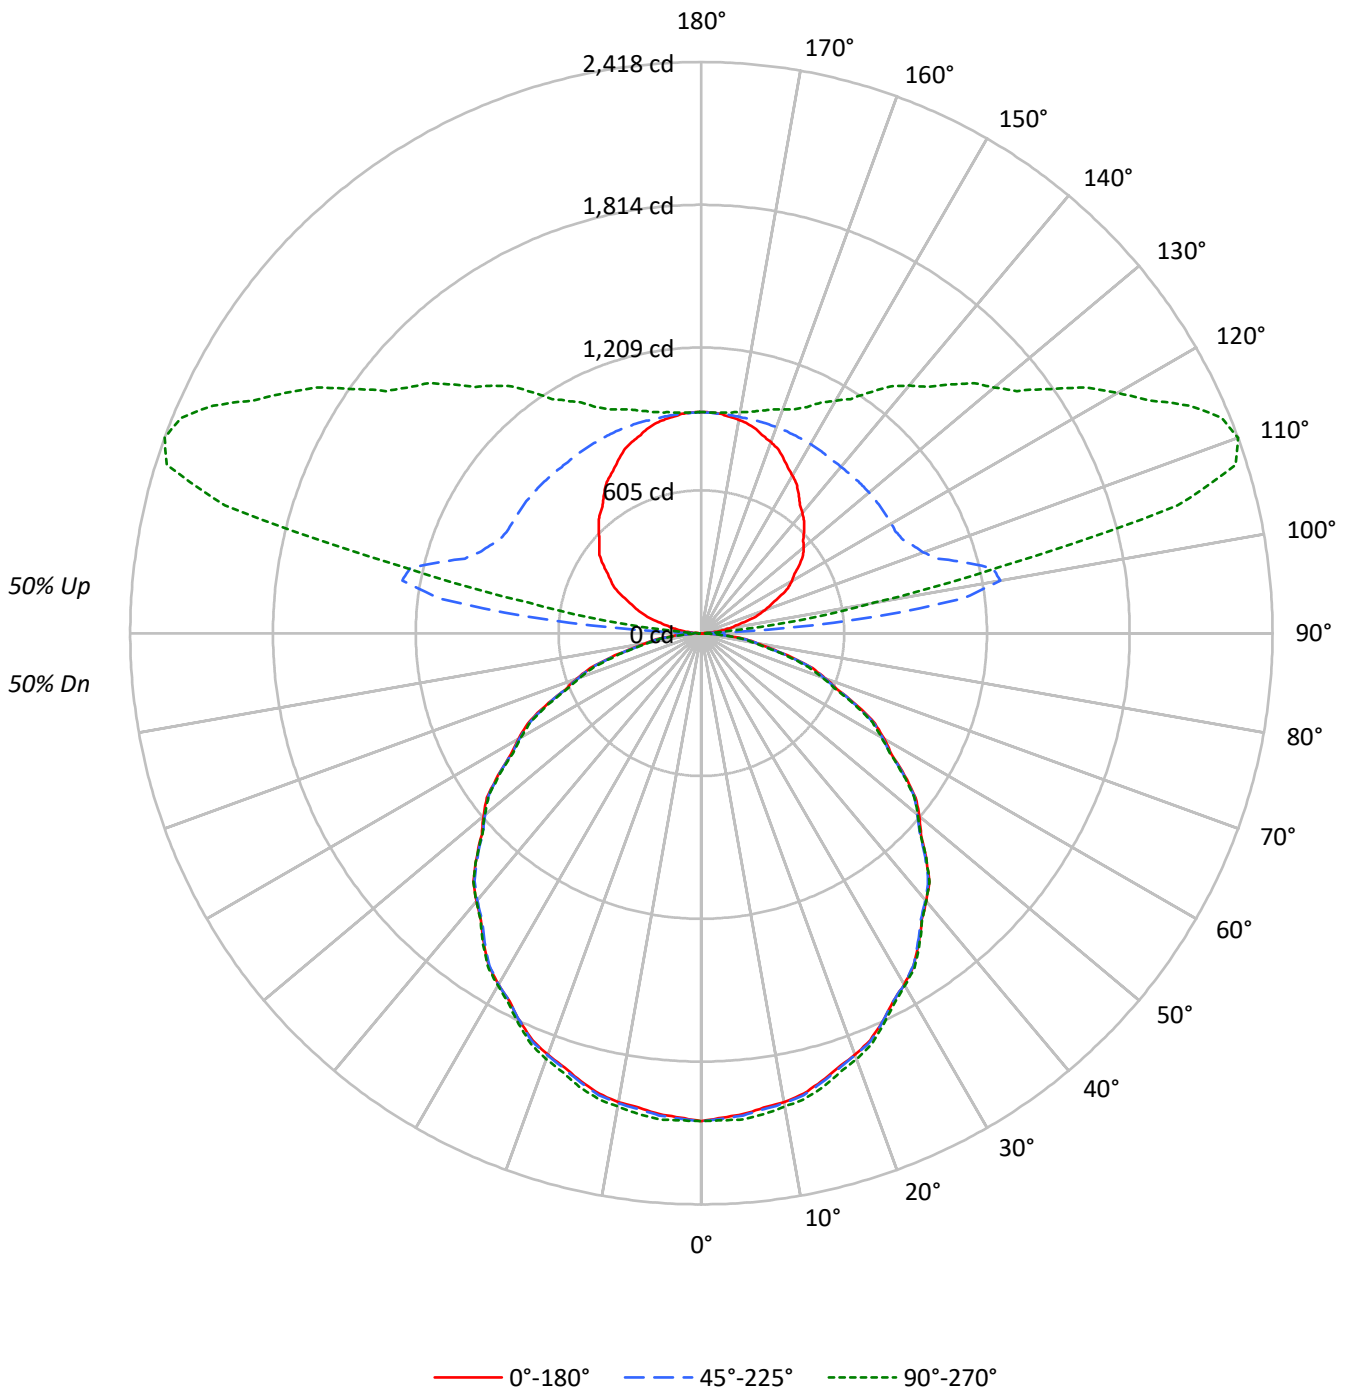



TEST NUMBER: P855470

CATALOG NUMBER: SQ2-F-125U-125D-840-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	93	89	86	90	86	83	80	73	70	68	61	59	57	49	48	47	42
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	43	41	39	35
3	81	71	64	58	74	66	59	54	56	51	47	47	43	40	38	36	33	29
4	74	63	55	49	68	58	51	46	50	44	40	42	38	34	34	31	29	25
5	68	56	48	42	62	52	45	39	44	39	34	37	33	30	31	27	25	22
6	62	50	42	36	57	47	39	34	40	34	30	34	29	26	28	24	22	19
7	58	45	37	32	53	42	35	30	36	30	26	31	26	23	25	22	19	17
8	53	41	33	28	49	38	31	26	33	27	23	28	23	20	23	20	17	15
9	50	37	30	25	46	35	28	23	30	25	21	26	21	18	21	18	16	13
10	46	34	27	22	43	32	25	21	28	22	19	24	19	16	20	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	33354	33354	33354
5°	33117	33208	33481
10°	33039	33131	33362
15°	32837	32931	33260
20°	32641	32691	32981
25°	32340	32340	32541
30°	32009	32009	32114
35°	31621	31509	31732
40°	31202	31084	31202
45°	30718	30590	30718
50°	30258	29976	30047
55°	29551	29472	29315
60°	28811	28627	28446
65°	27958	27637	27312
70°	26309	26176	25643
75°	24753	24229	23525
80°	21990	21451	20679
85°	17729	16173	15117

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 30908 cd/sqm

TEST NUMBER: P855470

CATALOG NUMBER: SQ2-F-125U-125D-840-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.3	1.7
10°-20°	558.0	4.8
20°-30°	839.5	7.3
30°-40°	1004.5	8.7
40°-50°	1036.4	9.0
50°-60°	935.0	8.1
60°-70°	713.5	6.2
70°-80°	410.2	3.5
80°-90°	108.1	0.9
90°-100°	357.9	3.1
100°-110°	1165.1	10.1
110°-120°	1152.5	10.0
120°-130°	941.8	8.1
130°-140°	769.8	6.7
140°-150°	599.6	5.2
150°-160°	432.2	3.7
160°-170°	264.1	2.3
170°-180°	89.1	0.8
0°-30°	1592.7	13.8
0°-40°	2597.2	22.4
0°-60°	4568.5	39.5
0°-90°	5800.2	50.1
90°-120°	2675.5	23.1
90°-150°	4986.7	43.1
90°-180°	5772.0	49.9
0°-180°	11572.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2066	2066	2066	2066	2066	
5°	2043	2071	2049	2052	2066	194
15°	1964	1989	1970	1979	1990	554
25°	1815	1835	1815	1818	1827	836
35°	1604	1615	1599	1604	1610	1003
45°	1345	1354	1340	1342	1345	1038
55°	1050	1055	1047	1041	1041	939
65°	732	729	723	718	715	719
75°	397	394	388	380	377	418
85°	96	90	87	79	82	111
90°	0	3	8	7	7	6
95°	48	147	656	234	144	56
105°	198	286	1154	2204	2088	211
115°	366	437	940	1938	2280	362
125°	509	567	928	1530	1803	453
135°	614	679	923	1320	1489	475
145°	718	771	921	1137	1245	450
155°	819	846	926	1018	1056	377
165°	894	902	929	963	975	252
175°	932	932	932	939	937	88
180°	936	936	936	936	936	



TEST NUMBER: P855470

CATALOG NUMBER: SQ2-F-125U-125D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2065.8	2065.8	2065.8	2065.8	2065.8
2.5°	2052.3	2076.5	2056.8	2061.4	2063.6
5°	2043.3	2070.8	2048.9	2052.0	2065.8
7.5°	2026.4	2056.1	2032.1	2037.5	2052.9
10°	2015.2	2042.7	2020.8	2023.8	2034.9
12.5°	1997.1	2024.7	2002.7	2008.1	2019.1
15°	1964.5	1989.2	1970.1	1978.9	1989.8
17.5°	1926.8	1953.2	1931.9	1939.3	1948.8
20°	1899.7	1921.7	1902.6	1905.7	1919.5
22.5°	1866.0	1888.1	1871.1	1871.9	1883.4
25°	1815.3	1834.6	1815.3	1818.4	1826.6
27.5°	1757.3	1773.9	1757.3	1760.3	1767.4
30°	1716.9	1733.3	1716.9	1719.7	1722.5
32.5°	1671.8	1686.1	1669.6	1672.6	1679.7
35°	1604.3	1615.2	1598.6	1604.4	1609.9
37.5°	1532.2	1540.4	1526.6	1529.5	1534.5
40°	1480.4	1488.7	1474.8	1477.6	1480.4
42.5°	1428.7	1434.7	1420.7	1423.7	1428.7
45°	1345.3	1353.6	1339.7	1342.5	1345.3
47.5°	1260.8	1265.9	1254.1	1252.0	1257.0
50°	1204.6	1207.4	1193.4	1193.4	1196.2
52.5°	1143.8	1146.5	1137.1	1132.7	1135.3
55°	1049.8	1055.3	1047.0	1041.4	1041.4
57.5°	955.3	960.2	949.6	946.8	946.2
60°	892.2	894.9	886.5	883.7	880.9
62.5°	829.2	829.6	821.3	818.3	815.7
65°	731.8	729.0	723.4	717.7	714.9
67.5°	622.6	625.4	619.8	610.8	610.8
70°	557.3	560.0	554.5	543.2	543.2
72.5°	494.2	492.6	489.1	480.0	475.6
75°	396.8	394.1	388.4	379.9	377.1
77.5°	299.5	296.7	293.8	283.2	285.4
80°	236.5	233.7	230.7	222.4	222.4
82.5°	180.2	175.2	172.2	163.9	163.9
85°	95.7	90.2	87.3	78.9	81.6
87.5°	27.0	25.5	24.1	19.3	19.3
90°	0.0	3.4	8.0	6.9	6.9
92.5°	16.5	59.6	190.3	62.7	48.4
95°	48.4	147.3	655.9	233.9	143.8
97.5°	90.9	191.7	1113.2	678.0	413.8
100°	118.5	217.6	1285.3	1146.2	743.4
102.5°	149.9	245.2	1264.2	1695.7	1289.3
105°	197.9	285.6	1154.2	2204.5	2087.5
107.5°	250.0	332.5	1049.7	2248.5	2372.5
110°	287.7	363.0	1000.0	2193.8	2417.7



TEST NUMBER: P855470

CATALOG NUMBER: SQ2-F-125U-125D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	319.0	393.4	968.7	2094.9	2383.6
115°	365.9	436.8	940.1	1937.6	2279.6
117.5°	414.3	478.2	929.1	1793.4	2134.0
120°	441.9	504.9	926.4	1704.9	2034.4
122.5°	468.6	530.7	927.3	1627.9	1935.0
125°	508.6	567.1	927.5	1529.8	1803.2
127.5°	543.0	602.7	927.3	1456.3	1684.2
130°	565.0	625.8	926.4	1414.2	1617.9
132.5°	584.3	647.8	925.4	1375.3	1566.4
135°	614.5	678.6	922.9	1320.3	1489.0
137.5°	644.0	708.6	920.3	1264.3	1414.2
140°	665.1	727.0	919.4	1226.5	1368.2
142.5°	685.4	744.6	919.4	1190.2	1316.7
145°	718.0	770.9	920.6	1137.1	1245.1
147.5°	749.8	795.7	922.2	1091.9	1175.3
150°	771.0	811.5	924.0	1064.8	1135.8
152.5°	792.1	825.5	925.0	1044.3	1100.8
155°	819.3	846.3	926.4	1018.1	1056.3
157.5°	845.1	864.5	927.8	998.7	1025.6
160°	860.8	876.5	928.6	986.6	1008.1
162.5°	874.5	886.8	928.6	976.4	992.3
165°	894.1	902.0	928.6	963.4	974.6
167.5°	908.0	912.9	928.8	953.6	959.5
170°	917.2	919.4	929.8	947.1	949.3
172.5°	923.6	925.0	931.6	943.4	942.9
175°	932.1	932.1	932.1	939.0	936.7
177.5°	935.6	934.7	933.7	938.3	934.7
180°	935.6	935.6	935.6	935.6	935.6



TEST NUMBER: P855470

CATALOG NUMBER: SQ2-F-125U-125D-840-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.16	21.04	21.12	22.01	23.28	20.09	20.96	21.04	21.93	23.20
	3H	21.95	22.73	22.91	23.71	25.00	21.83	22.61	22.79	23.59	24.88
	4H	22.61	23.35	23.58	24.33	25.63	22.45	23.20	23.43	24.18	25.48
	6H	23.08	23.76	24.06	24.75	26.06	22.89	23.57	23.88	24.56	25.88
	8H	23.21	23.87	24.21	24.87	26.18	23.01	23.66	24.01	24.67	25.98
	12H	23.29	23.91	24.29	24.91	26.24	23.07	23.69	24.07	24.69	26.02
4H	2H	20.72	21.46	21.70	22.44	23.74	20.66	21.40	21.64	22.38	23.68
	3H	22.71	23.33	23.70	24.34	25.65	22.60	23.22	23.59	24.23	25.54
	4H	23.50	24.06	24.50	25.07	26.41	23.35	23.92	24.36	24.93	26.26
	6H	24.09	24.58	25.10	25.61	26.94	23.91	24.40	24.92	25.43	26.76
	8H	24.27	24.73	25.29	25.75	27.10	24.07	24.53	25.09	25.55	26.90
	12H	24.38	24.79	25.41	25.83	27.18	24.15	24.56	25.18	25.60	26.96
8H	4H	23.74	24.20	24.76	25.22	26.57	23.62	24.07	24.63	25.10	26.45
	6H	24.46	24.84	25.50	25.90	27.25	24.30	24.67	25.34	25.74	27.09
	8H	24.73	25.06	25.78	26.11	27.48	24.54	24.87	25.59	25.92	27.29
	12H	24.90	25.19	25.95	26.24	27.64	24.67	24.96	25.72	26.01	27.42
12H	4H	23.74	24.15	24.77	25.19	26.54	23.62	24.03	24.65	25.07	26.42
	6H	24.51	24.84	25.55	25.89	27.25	24.35	24.68	25.39	25.73	27.10
	8H	24.80	25.09	25.85	26.14	27.55	24.61	24.91	25.67	25.95	27.36