

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855441

Luminaire Tested: SQ2-FA-150U-050D-840-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855441
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-14, G2-2308-131-11)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FA-150U-050D-840-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9256.4 lumens
Efficiency: N/A
Efficacy: 124.4 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 0.95 / 0.95
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 74.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855441
CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

Luminous Intensity Polar Plot

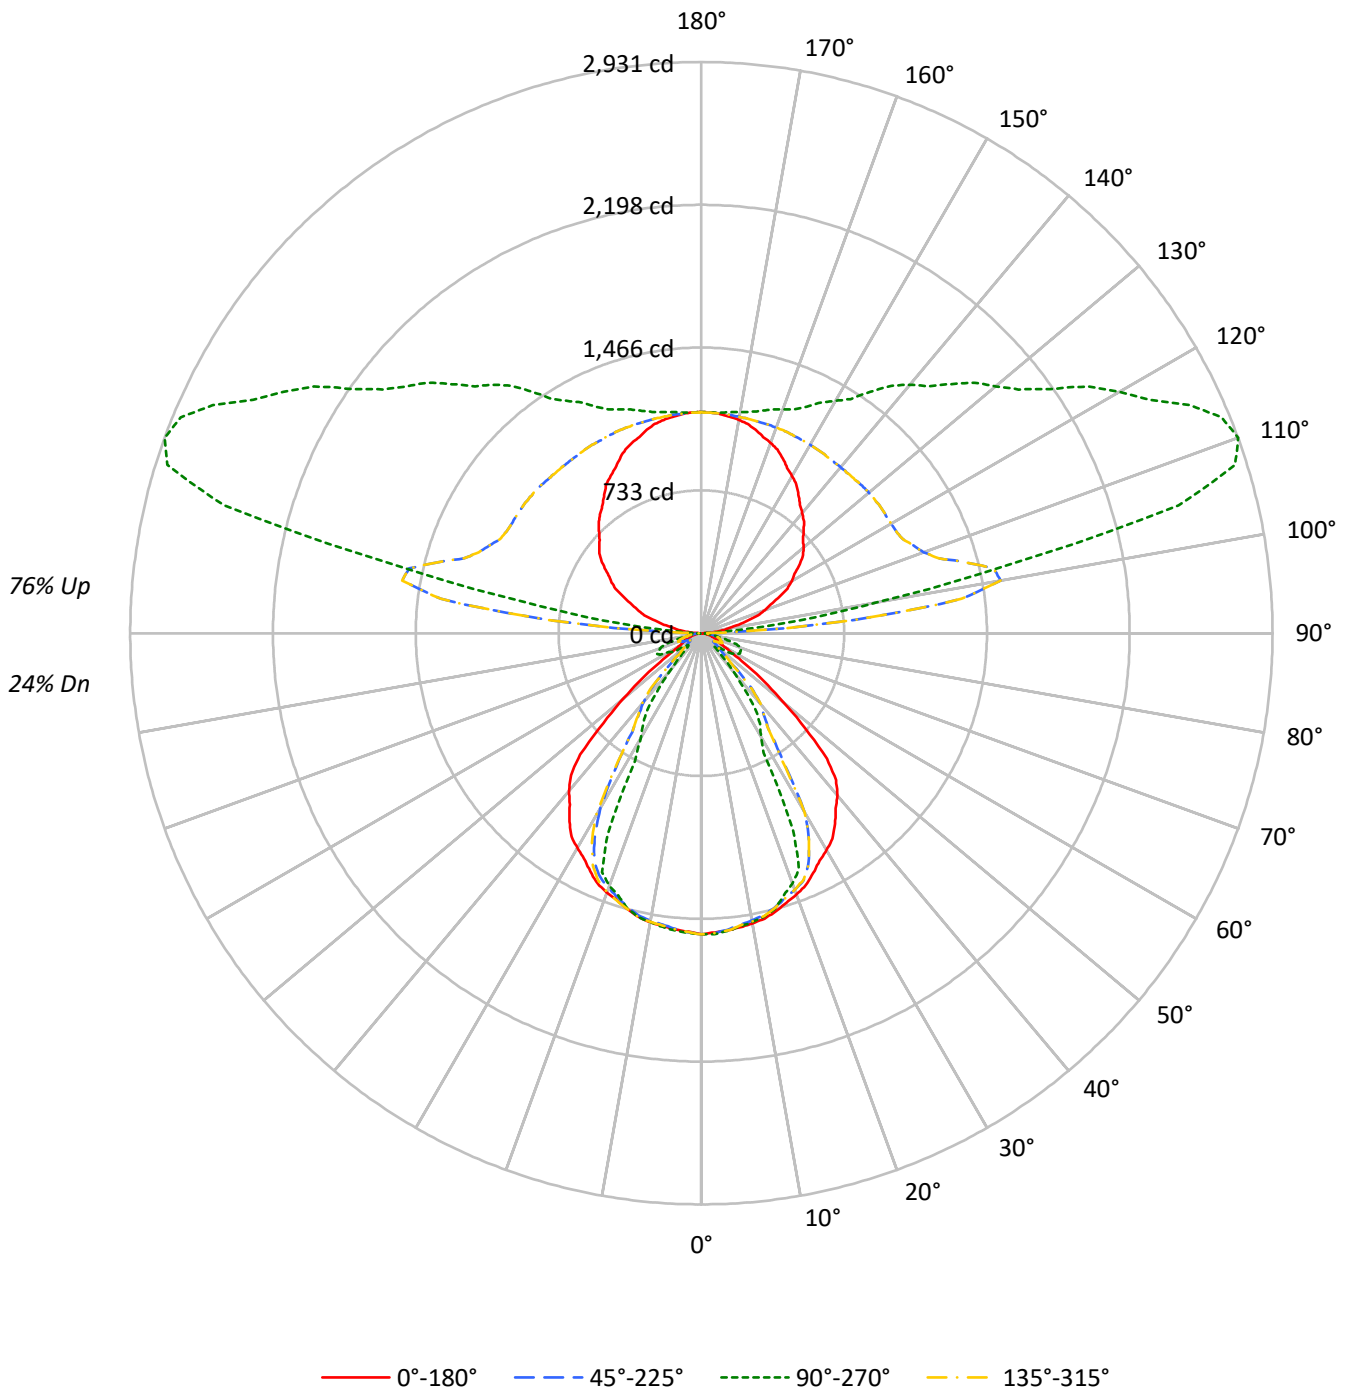



TEST NUMBER: P855441

CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	24
1	93	89	85	82	82	79	76	73	61	59	58	45	44	43	30	29	28	22
2	85	78	72	68	75	70	65	61	54	51	49	40	38	36	27	26	25	19
3	78	69	63	57	69	62	56	52	48	45	42	36	34	32	24	23	22	17
4	71	62	54	49	63	55	49	45	44	39	36	33	30	28	22	21	20	15
5	66	55	48	42	59	50	43	39	39	35	31	30	27	24	20	19	18	14
6	61	50	42	37	54	45	38	34	36	31	28	27	24	22	19	17	16	13
7	56	45	38	33	50	41	34	30	32	28	25	25	22	20	18	16	14	12
8	52	41	34	29	47	37	31	27	30	25	22	23	20	18	16	15	13	11
9	49	37	31	26	44	34	28	24	27	23	20	21	18	16	15	13	12	10
10	45	34	28	23	41	31	25	22	25	21	18	20	17	15	14	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	24950	24950	24950	24950
5°	24819	24857	24725	24838
10°	24781	24686	24686	24686
15°	24700	24448	24506	24448
20°	24510	23469	24330	23689
25°	24187	19807	24022	20222
30°	23964	11363	23705	11516
35°	23544	9763	23246	9625
40°	22894	5134	22255	5084
45°	20808	2208	20064	2208
50°	13730	2665	13026	2489
55°	7676	4921	7282	4462
60°	4140	6923	4066	6210
65°	3652	8416	3828	9574
70°	3413	10069	3248	10617
75°	3200	8652	3269	8939
80°	2706	6174	2706	6499
85°	2371	3446	2167	4094

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20808 cd/sqm



TEST NUMBER: P855441

CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	145.4	1.6
10°-20°	412.6	4.5
20°-30°	562.5	6.1
30°-40°	472.7	5.1
40°-50°	268.5	2.9
50°-60°	142.5	1.5
60°-70°	131.2	1.4
70°-80°	96.3	1.0
80°-90°	26.4	0.3
90°-100°	432.0	4.7
100°-110°	1414.7	15.3
110°-120°	1398.6	15.1
120°-130°	1143.3	12.4
130°-140°	933.0	10.1
140°-150°	726.1	7.8
150°-160°	522.8	5.6
160°-170°	319.8	3.5
170°-180°	108.1	1.2
0°-30°	1120.5	12.1
0°-40°	1593.2	17.2
0°-60°	2004.2	21.7
0°-90°	2258.1	24.4
90°-120°	3245.3	35.1
90°-150°	6047.6	65.3
90°-180°	6998.0	75.6
0°-180°	9256.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1545	1545	1545	1545	1545	
5°	1531	1534	1526	1532	1531	146
15°	1478	1463	1466	1463	1478	417
25°	1358	1112	1348	1135	1358	626
35°	1194	495	1179	488	1194	746
45°	911	97	879	97	911	666
55°	273	175	259	158	273	263
65°	96	220	100	251	96	96
75°	51	139	52	143	51	53
85°	13	19	12	22	13	14
90°	1	9	1	9	1	4
95°	61	182	61	182	61	69
105°	246	2534	246	2534	246	259
115°	443	2768	443	2768	443	437
125°	616	2184	616	2184	616	548
135°	742	1807	742	1807	742	574
145°	868	1511	868	1511	868	544
155°	989	1282	989	1282	989	455
165°	1080	1180	1080	1180	1080	304
175°	1129	1136	1129	1136	1129	107
180°	1134	1134	1134	1134	1134	



TEST NUMBER: P855441

CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	1545.3	1545.3	1545.3	1545.3	1545.3	1545.3	1545.3	1545.3	1545.3	1545.3	1545.3
2.5°	1536.9	1559.8	1539.7	1537.2	1545.3	1543.5	1540.7	1551.5	1533.2	1551.5	1536.9
5°	1531.3	1557.6	1527.8	1520.0	1533.7	1524.6	1532.5	1548.4	1525.5	1546.0	1523.2
7.5°	1521.8	1545.1	1509.4	1504.4	1517.8	1509.9	1513.2	1535.1	1516.0	1529.4	1508.7
10°	1511.5	1532.0	1496.4	1493.2	1505.7	1497.8	1501.0	1524.0	1505.7	1518.3	1497.5
12.5°	1500.3	1516.3	1480.5	1479.1	1489.8	1484.6	1486.1	1505.3	1490.8	1503.4	1483.6
15°	1477.7	1492.5	1456.8	1451.2	1462.6	1458.0	1460.2	1477.5	1466.1	1474.1	1456.8
17.5°	1449.8	1461.6	1426.0	1409.2	1409.7	1415.4	1426.0	1446.7	1436.5	1447.0	1422.5
20°	1426.5	1440.1	1400.8	1368.2	1365.9	1371.6	1400.8	1421.7	1416.0	1427.4	1392.7
22.5°	1399.4	1408.5	1372.8	1317.7	1309.9	1315.6	1369.1	1393.8	1391.7	1399.5	1356.3
25°	1357.7	1366.8	1301.8	1222.4	1111.8	1215.5	1304.1	1348.4	1348.4	1355.2	1298.3
27.5°	1315.3	1315.5	1197.8	785.0	692.5	756.8	1196.2	1292.2	1303.2	1299.8	1187.8
30°	1285.4	1277.5	1061.7	634.6	609.5	625.5	1062.8	1253.3	1271.5	1259.0	1034.9
32.5°	1250.9	1228.3	783.8	583.4	562.9	577.0	758.0	1206.9	1238.8	1211.7	813.9
35°	1194.5	1135.3	597.9	515.8	495.3	513.5	593.2	1115.6	1179.4	1106.4	617.7
37.5°	1133.7	902.4	526.3	410.8	366.6	401.9	523.7	892.7	1109.0	872.0	525.8
40°	1086.2	709.0	473.2	300.6	243.6	283.4	469.7	676.4	1055.9	727.7	461.5
42.5°	1022.8	622.8	379.9	190.9	149.4	174.7	364.3	608.5	990.6	630.5	367.3
45°	911.3	535.3	224.9	104.7	96.7	101.3	207.4	525.5	878.7	514.1	229.6
47.5°	721.8	408.2	144.5	89.0	97.7	89.0	140.1	395.3	681.8	394.6	144.3
50°	546.6	318.6	111.9	90.1	106.1	90.1	108.4	307.8	518.6	336.3	110.7
52.5°	404.9	266.3	91.4	98.8	127.5	100.6	88.8	259.2	384.3	271.3	86.5
55°	272.7	208.8	73.4	130.4	174.8	133.8	73.4	202.9	258.7	200.6	71.1
57.5°	172.9	155.3	74.4	167.6	199.5	170.8	75.5	149.8	166.0	150.5	65.3
60°	128.2	122.5	82.7	178.0	214.4	180.3	83.9	117.9	125.9	116.8	69.9
62.5°	105.8	96.5	99.5	192.8	222.8	187.7	101.6	92.1	110.0	88.1	77.4
65°	95.6	62.5	117.7	195.2	220.3	195.2	118.9	59.2	100.2	63.7	104.9
67.5°	86.2	46.4	113.7	193.8	221.7	194.3	110.9	44.3	82.7	43.1	107.2
70°	72.3	41.5	107.2	197.3	213.3	190.4	107.2	40.3	68.8	39.2	125.9
72.5°	60.1	39.4	99.8	182.2	189.0	175.4	100.7	39.2	60.4	35.3	118.4
75°	51.3	38.7	95.6	145.6	138.7	138.7	93.2	37.6	52.4	35.3	92.1
77.5°	38.5	34.4	79.2	95.0	89.7	89.7	77.8	33.2	36.6	31.1	74.8
80°	29.1	31.5	65.3	69.8	66.4	66.4	62.9	30.3	29.1	29.1	61.8
82.5°	22.6	26.7	50.3	51.3	48.7	47.8	48.9	26.5	22.6	24.5	47.8
85°	12.8	18.5	26.8	22.0	18.6	17.5	25.6	17.4	11.7	17.4	25.6
87.5°	4.9	9.0	5.6	5.4	5.6	5.4	5.6	9.0	4.9	8.0	6.5
90°	1.2	3.5	9.3	8.2	9.3	8.2	9.3	3.5	1.2	3.5	9.3
92.5°	19.8	72.3	221.9	72.1	57.8	72.1	221.9	72.3	19.8	72.3	221.9
95°	60.6	175.6	785.5	279.8	181.8	279.8	785.5	175.6	60.6	175.6	785.5
97.5°	110.0	231.7	1347.6	815.2	505.3	815.2	1347.6	231.7	110.0	231.7	1347.6
100°	144.5	260.7	1559.2	1392.4	922.9	1392.4	1559.2	260.7	144.5	260.7	1559.2
102.5°	183.7	297.2	1535.9	2051.7	1590.4	2051.7	1535.9	297.2	183.7	297.2	1535.9
105°	245.9	350.7	1404.2	2667.8	2534.5	2667.8	1404.2	350.7	245.9	350.7	1404.2
107.5°	307.2	403.3	1275.8	2725.5	2872.0	2725.5	1275.8	403.3	307.2	403.3	1275.8
110°	347.3	440.8	1214.2	2658.4	2930.8	2658.4	1214.2	440.8	347.3	440.8	1214.2



TEST NUMBER: P855441

CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	385.5	476.2	1176.9	2541.7	2890.7	2541.7	1176.9	476.2	385.5	476.2	1176.9
115°	442.9	529.4	1140.8	2357.5	2767.6	2357.5	1140.8	529.4	442.9	529.4	1140.8
117.5°	498.6	579.4	1127.1	2176.3	2592.8	2176.3	1127.1	579.4	498.6	579.4	1127.1
120°	534.9	611.3	1123.3	2070.7	2476.2	2070.7	1123.3	611.3	534.9	611.3	1123.3
122.5°	567.6	642.0	1123.3	1979.6	2356.1	1979.6	1123.3	642.0	567.6	642.0	1123.3
125°	616.5	687.1	1124.5	1859.0	2183.8	1859.0	1124.5	687.1	616.5	687.1	1124.5
127.5°	658.0	729.9	1123.1	1770.2	2052.9	1770.2	1123.1	729.9	658.0	729.9	1123.1
130°	684.1	756.9	1122.2	1716.5	1971.7	1716.5	1122.2	756.9	684.1	756.9	1122.2
132.5°	707.4	782.1	1119.4	1670.3	1901.8	1670.3	1119.4	782.1	707.4	782.1	1119.4
135°	742.4	820.9	1115.2	1603.5	1807.4	1603.5	1115.2	820.9	742.4	820.9	1115.2
137.5°	779.2	857.0	1112.6	1533.8	1718.2	1533.8	1112.6	857.0	779.2	857.0	1112.6
140°	805.2	880.5	1111.7	1489.7	1664.1	1489.7	1111.7	880.5	805.2	880.5	1111.7
142.5°	831.3	902.0	1111.7	1442.8	1600.7	1442.8	1111.7	902.0	831.3	902.0	1111.7
145°	868.1	932.0	1112.8	1379.3	1511.4	1379.3	1112.8	932.0	868.1	932.0	1112.8
147.5°	906.8	959.9	1114.5	1324.0	1423.8	1324.0	1114.5	959.9	906.8	959.9	1114.5
150°	931.0	977.8	1116.3	1292.0	1376.2	1292.0	1116.3	977.8	931.0	977.8	1116.3
152.5°	955.3	996.5	1117.3	1265.5	1335.2	1265.5	1117.3	996.5	955.3	996.5	1117.3
155°	989.3	1022.4	1119.8	1234.0	1281.8	1234.0	1119.8	1022.4	989.3	1022.4	1119.8
157.5°	1019.8	1043.8	1122.4	1209.2	1243.8	1209.2	1122.4	1043.8	1019.8	1043.8	1122.4
160°	1039.4	1058.9	1123.3	1195.1	1222.4	1195.1	1123.3	1058.9	1039.4	1058.9	1123.3
162.5°	1056.2	1071.9	1123.3	1183.7	1203.7	1183.7	1123.3	1071.9	1056.2	1071.9	1123.3
165°	1080.2	1090.5	1124.5	1168.0	1180.4	1168.0	1124.5	1090.5	1080.2	1090.5	1124.5
167.5°	1100.5	1105.5	1125.9	1155.7	1162.5	1155.7	1125.9	1105.5	1100.5	1105.5	1125.9
170°	1111.7	1114.0	1126.8	1149.1	1151.3	1149.1	1126.8	1114.0	1111.7	1114.0	1126.8
172.5°	1120.1	1121.5	1129.6	1144.3	1144.8	1144.3	1129.6	1121.5	1120.1	1121.5	1129.6
175°	1129.2	1129.2	1130.3	1138.5	1136.1	1138.5	1130.3	1129.2	1129.2	1129.2	1130.3
177.5°	1133.8	1132.9	1132.0	1137.5	1133.8	1137.5	1132.0	1132.9	1133.8	1132.9	1132.0
180°	1133.8	1133.8	1133.8	1133.8	1133.8	1133.8	1133.8	1133.8	1133.8	1133.8	1133.8



TEST NUMBER: P855441

CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	1545.3	1545.3	1545.3	1545.3	1545.3	1545.3
2.5°	1533.3	1539.7	1539.7	1536.0	1554.3	1536.9
5°	1517.7	1532.5	1525.6	1525.5	1548.5	1531.3
7.5°	1506.7	1520.6	1514.2	1512.9	1535.4	1521.8
10°	1495.4	1505.7	1501.2	1504.5	1525.2	1511.5
12.5°	1479.6	1491.7	1487.2	1492.4	1511.3	1500.3
15°	1452.3	1462.6	1464.9	1467.2	1489.1	1477.7
17.5°	1407.2	1412.2	1423.7	1439.7	1462.6	1449.8
20°	1371.8	1378.7	1385.5	1413.6	1440.1	1426.5
22.5°	1331.6	1329.3	1345.2	1378.2	1411.3	1399.4
25°	1222.9	1135.1	1231.9	1316.9	1361.1	1357.7
27.5°	851.4	738.9	838.5	1215.5	1308.4	1315.3
30°	670.1	617.7	668.9	1085.0	1269.5	1285.4
32.5°	594.9	558.9	590.2	825.8	1220.4	1250.9
35°	513.4	488.3	513.4	617.7	1123.9	1194.5
37.5°	410.9	359.6	410.0	533.8	908.5	1133.7
40°	306.2	241.2	297.1	477.8	726.0	1086.2
42.5°	204.1	155.5	193.1	376.2	628.0	1022.8
45°	110.4	96.7	105.8	227.3	512.5	911.3
47.5°	86.6	91.6	86.6	143.3	392.0	721.8
50°	83.1	99.1	83.1	110.7	324.3	546.6
52.5°	90.6	107.4	89.6	87.4	264.7	404.9
55°	102.7	158.5	103.8	71.1	194.0	272.7
57.5°	146.1	178.3	147.8	67.4	149.5	172.9
60°	150.1	192.3	148.9	71.1	115.6	128.2
62.5°	177.6	238.0	177.4	81.3	86.0	105.8
65°	227.7	250.6	230.1	103.7	61.4	95.6
67.5°	216.2	232.4	214.0	111.2	42.3	86.2
70°	212.3	224.9	210.1	127.0	39.2	72.3
72.5°	198.1	199.7	194.0	117.7	35.3	60.1
75°	153.6	143.3	147.9	101.4	35.3	51.3
77.5°	95.4	91.4	92.1	77.4	31.1	38.5
80°	72.3	69.9	68.8	65.3	29.1	29.1
82.5°	53.6	51.3	50.1	50.3	24.5	22.6
85°	24.5	22.1	21.0	29.1	17.4	12.8
87.5°	6.3	6.5	5.4	6.5	7.2	4.9
90°	8.2	9.3	8.2	9.3	3.5	1.2
92.5°	72.1	57.8	72.1	221.9	72.3	19.8
95°	279.8	181.8	279.8	785.5	175.6	60.6
97.5°	815.2	505.3	815.2	1347.6	231.7	110.0
100°	1392.4	922.9	1392.4	1559.2	260.7	144.5
102.5°	2051.7	1590.4	2051.7	1535.9	297.2	183.7
105°	2667.8	2534.5	2667.8	1404.2	350.7	245.9
107.5°	2725.5	2872.0	2725.5	1275.8	403.3	307.2
110°	2658.4	2930.8	2658.4	1214.2	440.8	347.3



TEST NUMBER: P855441

CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	2541.7	2890.7	2541.7	1176.9	476.2	385.5
115°	2357.5	2767.6	2357.5	1140.8	529.4	442.9
117.5°	2176.3	2592.8	2176.3	1127.1	579.4	498.6
120°	2070.7	2476.2	2070.7	1123.3	611.3	534.9
122.5°	1979.6	2356.1	1979.6	1123.3	642.0	567.6
125°	1859.0	2183.8	1859.0	1124.5	687.1	616.5
127.5°	1770.2	2052.9	1770.2	1123.1	729.9	658.0
130°	1716.5	1971.7	1716.5	1122.2	756.9	684.1
132.5°	1670.3	1901.8	1670.3	1119.4	782.1	707.4
135°	1603.5	1807.4	1603.5	1115.2	820.9	742.4
137.5°	1533.8	1718.2	1533.8	1112.6	857.0	779.2
140°	1489.7	1664.1	1489.7	1111.7	880.5	805.2
142.5°	1442.8	1600.7	1442.8	1111.7	902.0	831.3
145°	1379.3	1511.4	1379.3	1112.8	932.0	868.1
147.5°	1324.0	1423.8	1324.0	1114.5	959.9	906.8
150°	1292.0	1376.2	1292.0	1116.3	977.8	931.0
152.5°	1265.5	1335.2	1265.5	1117.3	996.5	955.3
155°	1234.0	1281.8	1234.0	1119.8	1022.4	989.3
157.5°	1209.2	1243.8	1209.2	1122.4	1043.8	1019.8
160°	1195.1	1222.4	1195.1	1123.3	1058.9	1039.4
162.5°	1183.7	1203.7	1183.7	1123.3	1071.9	1056.2
165°	1168.0	1180.4	1168.0	1124.5	1090.5	1080.2
167.5°	1155.7	1162.5	1155.7	1125.9	1105.5	1100.5
170°	1149.1	1151.3	1149.1	1126.8	1114.0	1111.7
172.5°	1144.3	1144.8	1144.3	1129.6	1121.5	1120.1
175°	1138.5	1136.1	1138.5	1130.3	1129.2	1129.2
177.5°	1137.5	1133.8	1137.5	1132.0	1132.9	1133.8
180°	1133.8	1133.8	1133.8	1133.8	1133.8	1133.8

TEST NUMBER: P855441

CATALOG NUMBER: SQ2-FA-150U-050D-840-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.98	8.60	9.14	9.74	11.34	6.83	7.46	8.00	8.60	10.20
	3H	8.67	9.23	9.84	10.38	11.99	12.97	13.54	14.14	14.68	16.30
	4H	9.07	9.60	10.25	10.75	12.37	14.24	14.78	15.42	15.92	17.54
	6H	9.41	9.91	10.60	11.06	12.69	14.84	15.33	16.02	16.48	18.11
	8H	9.53	9.99	10.71	11.16	12.78	14.96	15.43	16.14	16.59	18.21
	12H	9.59	10.03	10.78	11.19	12.84	14.99	15.44	16.18	16.59	18.24
4H	2H	8.35	8.89	9.54	10.03	11.65	7.35	7.88	8.53	9.03	10.65
	3H	9.34	9.78	10.53	10.96	12.59	13.66	14.10	14.85	15.28	16.91
	4H	9.89	10.30	11.08	11.47	13.12	15.10	15.52	16.29	16.68	18.33
	6H	10.36	10.71	11.55	11.90	13.53	15.83	16.18	17.03	17.37	19.01
	8H	10.53	10.86	11.72	12.03	13.69	16.00	16.33	17.19	17.50	19.16
	12H	10.64	10.93	11.84	12.12	13.78	16.05	16.35	17.26	17.53	19.19
8H	4H	10.98	11.31	12.17	12.49	14.14	15.22	15.54	16.41	16.72	18.38
	6H	11.59	11.86	12.80	13.07	14.73	16.09	16.36	17.30	17.58	19.23
	8H	11.82	12.06	13.04	13.25	14.92	16.34	16.58	17.56	17.77	19.44
	12H	11.99	12.19	13.20	13.38	15.09	16.46	16.66	17.67	17.85	19.56
12H	4H	11.12	11.42	12.33	12.60	14.26	15.17	15.47	16.38	16.65	18.31
	6H	11.86	12.10	13.08	13.29	14.96	16.10	16.34	17.32	17.53	19.20
	8H	12.15	12.36	13.37	13.55	15.25	16.37	16.58	17.59	17.77	19.47