

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855339

Luminaire Tested: SQ2-PP3-0U-100D-840-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P855339  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2308-131-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-PP3-0U-100D-840-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5385.1 lumens  
Efficiency: N/A  
Efficacy: 143.2 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 37.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P855339

CATALOG NUMBER: SQ2-PP3-0U-100D-840-UNV-STD-W-4

### Luminous Intensity Polar Plot

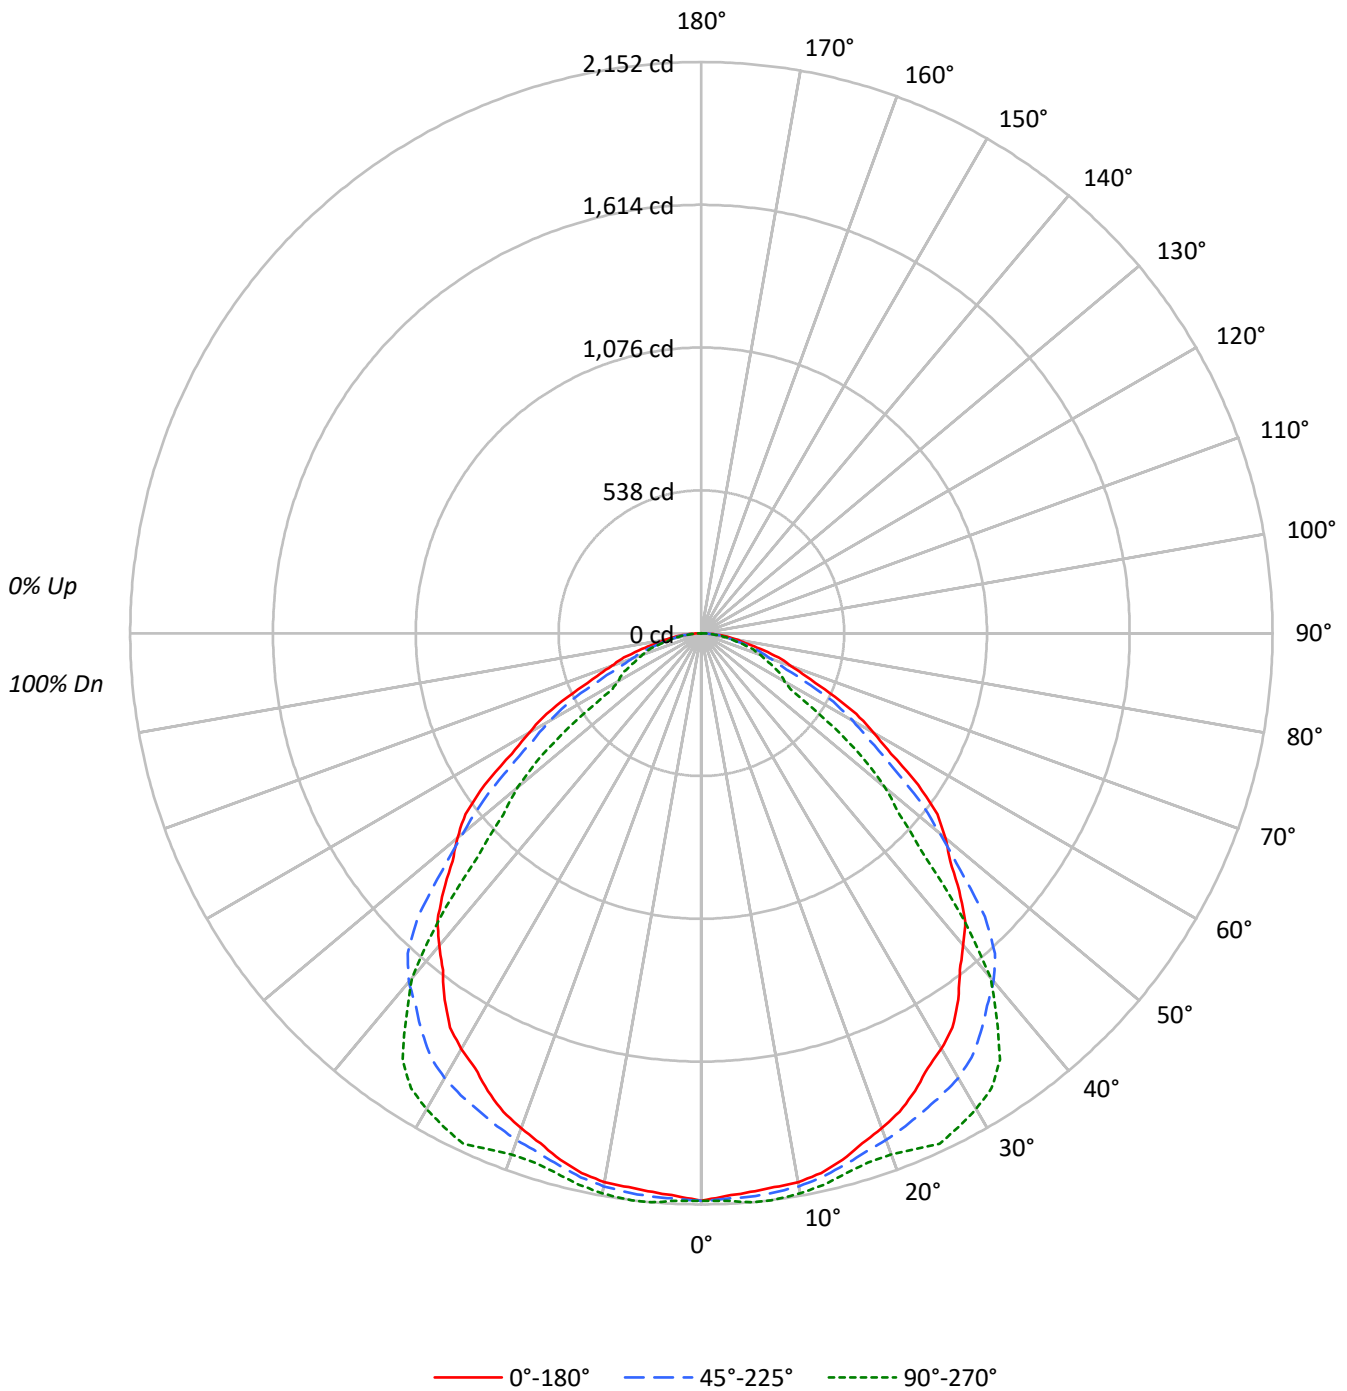



TEST NUMBER: P855339

CATALOG NUMBER: SQ2-PP3-OU-100D-840-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	89	87				87
2	101	94	88	82	99	92	86	81	88	84	80	85	81	78	82	79	76	74				74
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	69	66	64				64
4	86	74	66	60	83	73	66	60	71	64	59	68	63	58	66	61	57	55				55
5	79	67	59	52	77	66	58	52	64	57	52	62	56	51	60	55	50	48				48
6	73	61	52	46	71	60	52	46	58	51	46	56	50	45	55	49	45	43				43
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38				38
8	63	50	42	37	62	50	42	37	48	41	36	47	41	36	46	40	36	34				34
9	59	46	38	33	58	46	38	33	45	38	33	44	37	33	43	37	33	31				31
10	56	43	35	30	54	42	35	30	41	35	30	40	34	30	40	34	30	28				28

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	34525	34525	34525
5°	34255	34546	34877
10°	34428	34687	35131
15°	34345	34684	35214
20°	34099	34916	35924
25°	33905	35356	37812
30°	33715	36074	38602
35°	33236	36177	38672
40°	32349	36113	35732
45°	31383	34477	27202
50°	30147	29411	22654
55°	28059	24752	16287
60°	24161	21241	11677
65°	20378	16409	11488
70°	16966	12911	10990
75°	14379	11135	10293
80°	12190	9670	9242
85°	9633	7966	5039

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°  
 Vertical Angle: 45°  
 Luminance: 34477 cd/sqm

TEST NUMBER: P855339

CATALOG NUMBER: SQ2-PP3-OU-100D-840-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	203.6	3.8
10°-20°	589.3	10.9
20°-30°	923.2	17.1
30°-40°	1138.8	21.1
40°-50°	1072.2	19.9
50°-60°	759.2	14.1
60°-70°	432.6	8.0
70°-80°	214.0	4.0
80°-90°	52.3	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1716.0	31.9
0°-40°	2854.8	53.0
0°-60°	4686.2	87.0
0°-90°	5385.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5385.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2138	2138	2138	2138	2138	
5°	2114	2151	2132	2136	2152	201
15°	2055	2083	2075	2096	2107	579
25°	1903	1952	1985	2065	2122	877
35°	1686	1733	1835	1940	1962	1052
45°	1374	1478	1510	1280	1191	1058
55°	997	1057	879	663	579	879
65°	533	562	430	303	301	536
75°	230	255	178	167	165	250
85°	52	48	43	34	27	63
90°	0	0	0	0	0	



TEST NUMBER: P855339

CATALOG NUMBER: SQ2-PP3-OU-100D-840-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2138.3	2138.3	2138.3	2138.3	2138.3
2.5°	2122.1	2152.1	2132.9	2136.5	2140.1
5°	2113.5	2151.0	2131.5	2136.4	2151.9
7.5°	2105.3	2143.8	2124.8	2132.9	2151.9
10°	2099.9	2133.0	2115.7	2127.3	2142.8
12.5°	2083.6	2115.0	2099.5	2114.6	2128.4
15°	2054.7	2083.4	2075.0	2095.6	2106.7
17.5°	2015.3	2050.3	2050.2	2079.3	2090.8
20°	1984.6	2026.6	2032.1	2068.7	2090.8
22.5°	1952.0	2001.1	2010.3	2065.4	2103.5
25°	1903.2	1951.8	1984.6	2065.0	2122.5
27.5°	1846.2	1894.5	1962.0	2052.0	2097.6
30°	1808.4	1854.7	1934.9	2028.5	2070.5
32.5°	1761.3	1809.5	1895.1	1995.9	2034.3
35°	1686.2	1732.6	1835.4	1939.9	1962.0
37.5°	1599.9	1652.5	1767.6	1826.0	1827.2
40°	1534.8	1603.4	1713.4	1724.0	1695.3
42.5°	1471.6	1559.4	1637.4	1589.7	1462.0
45°	1374.4	1478.2	1509.9	1279.6	1191.3
47.5°	1270.8	1373.3	1322.7	1073.2	1012.2
50°	1200.2	1297.6	1170.9	959.4	901.9
52.5°	1120.6	1207.4	1035.2	850.2	762.6
55°	996.8	1056.6	879.3	662.6	578.6
57.5°	847.6	889.7	751.8	497.4	403.2
60°	748.2	781.3	657.8	408.1	361.6
62.5°	657.8	687.4	560.1	354.5	338.2
65°	533.4	562.2	429.5	302.9	300.7
67.5°	424.6	455.9	329.6	264.4	261.7
70°	359.4	392.5	273.5	237.3	232.8
72.5°	305.1	336.6	231.9	208.4	205.7
75°	230.5	254.9	178.5	167.2	165.0
77.5°	167.2	182.7	132.9	127.0	124.8
80°	131.1	137.8	104.0	101.6	99.4
82.5°	98.6	96.4	78.7	76.3	72.4
85°	52.0	47.5	43.0	33.8	27.2
87.5°	16.3	16.3	7.2	5.5	5.5
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P855339

CATALOG NUMBER: SQ2-PP3-OU-100D-840-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	23.75	25.27	24.11	25.58	25.90	20.14	21.67	20.51	21.98	22.29
	3H	24.89	26.25	25.27	26.58	26.94	21.30	22.66	21.67	22.99	23.35
	4H	25.26	26.54	25.66	26.89	27.27	21.79	23.07	22.19	23.41	23.79
	6H	25.51	26.69	25.92	27.06	27.45	22.17	23.34	22.58	23.71	24.10
	8H	25.58	26.70	26.00	27.09	27.49	22.27	23.39	22.70	23.78	24.18
	12H	25.61	26.68	26.04	27.07	27.50	22.31	23.38	22.74	23.76	24.19
4H	2H	23.93	25.21	24.33	25.56	25.94	20.94	22.21	21.34	22.56	22.94
	3H	25.30	26.36	25.71	26.76	27.16	22.25	23.30	22.66	23.70	24.10
	4H	25.80	26.75	26.24	27.16	27.60	22.83	23.77	23.26	24.19	24.63
	6H	26.17	27.00	26.63	27.44	27.90	23.30	24.12	23.76	24.57	25.03
	8H	26.28	27.05	26.74	27.49	27.96	23.43	24.20	23.90	24.65	25.11
	12H	26.34	27.03	26.83	27.51	27.98	23.49	24.18	23.97	24.66	25.13
8H	4H	25.87	26.63	26.33	27.08	27.55	23.15	23.91	23.61	24.36	24.83
	6H	26.32	26.95	26.82	27.45	27.92	23.71	24.35	24.21	24.84	25.32
	8H	26.48	27.05	26.99	27.56	28.05	23.90	24.47	24.41	24.98	25.47
	12H	26.59	27.10	27.10	27.59	28.15	24.00	24.51	24.51	25.00	25.56
12H	4H	25.85	26.54	26.34	27.02	27.49	23.18	23.87	23.66	24.35	24.82
	6H	26.31	26.88	26.82	27.39	27.88	23.76	24.34	24.28	24.85	25.34
	8H	26.51	27.01	27.02	27.51	28.07	24.00	24.51	24.51	25.00	25.56