

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855295

Luminaire Tested: SQ2-PW1-025U-100D-840-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855295
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-025U-100D-840-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6435.5 lumens
Efficiency: N/A
Efficacy: 143.0 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 45
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855295

CATALOG NUMBER: SQ2-PW1-025U-100D-840-UNV-STD-W-4

Luminous Intensity Polar Plot

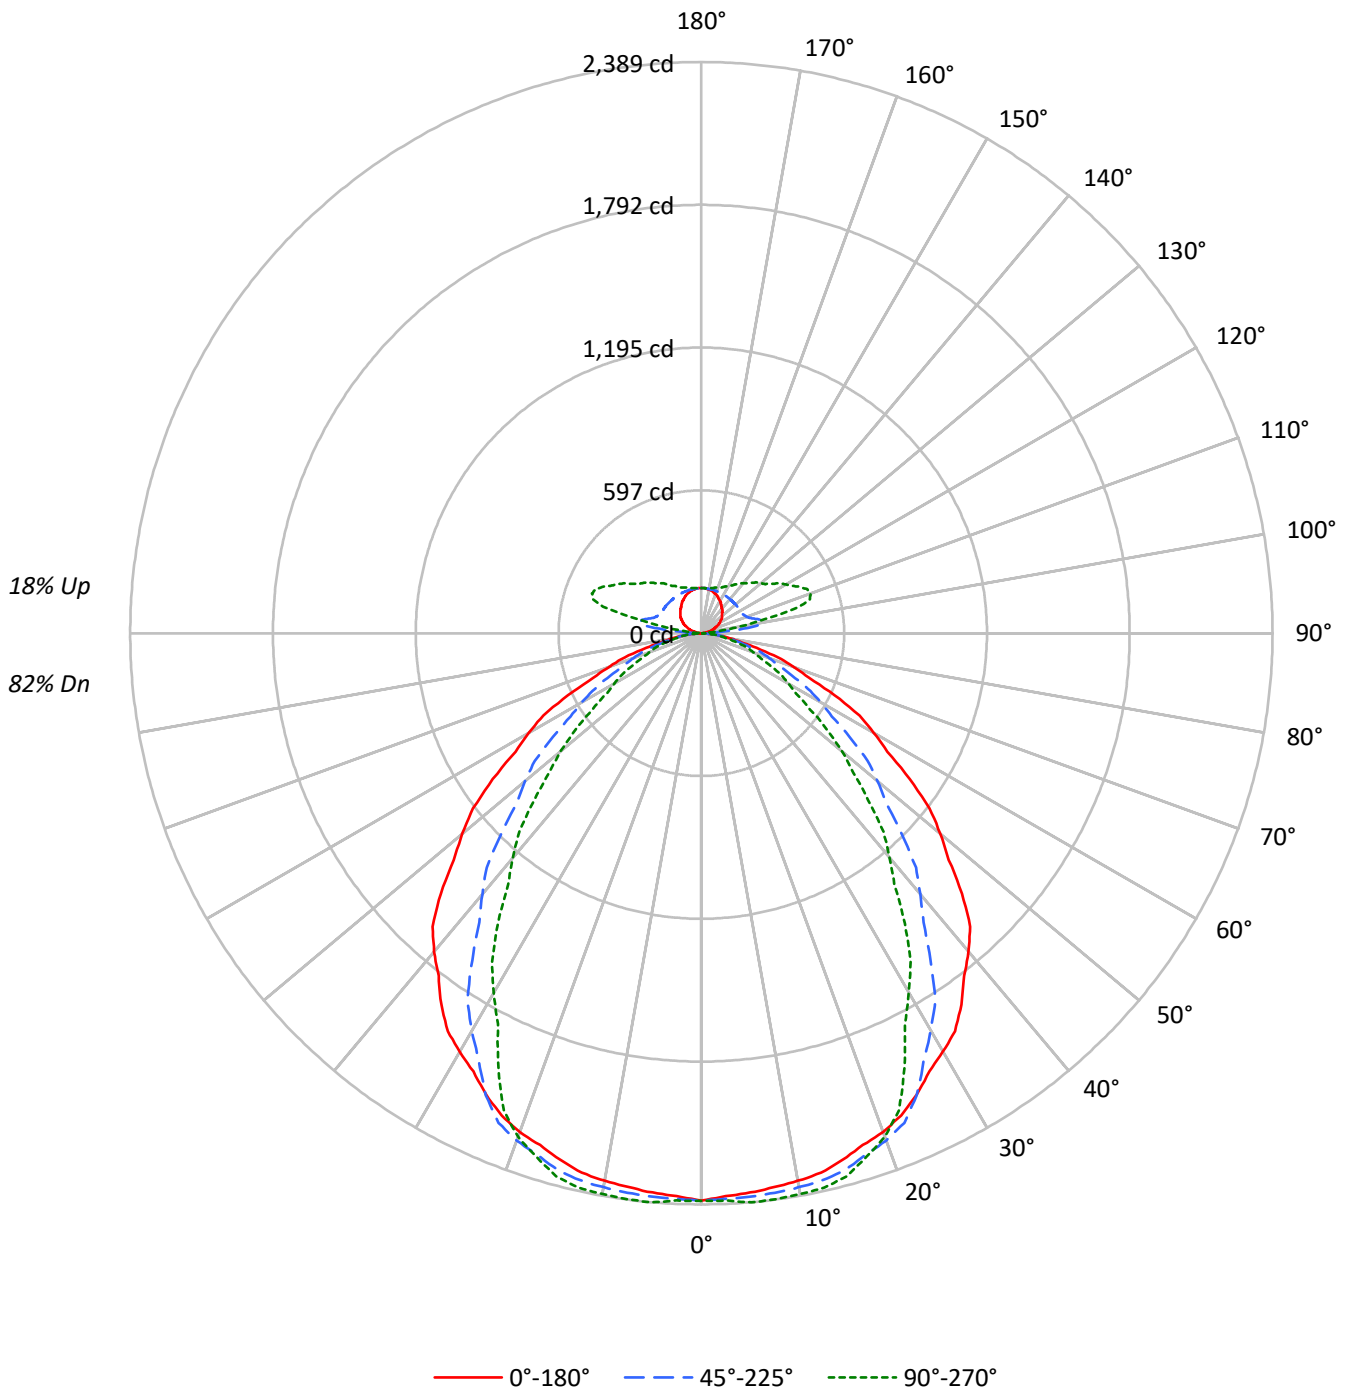



TEST NUMBER: P855295

CATALOG NUMBER: SQ2-PW1-025U-100D-840-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	115	115	115	115	110	110	110	110	101	101	101	93	93	93	85	85	85	82		
1	106	102	98	95	101	98	94	91	90	88	85	83	81	80	77	75	74	71		
2	97	90	84	79	93	87	81	77	80	76	72	74	71	68	69	66	64	61		
3	89	80	73	67	85	77	71	65	72	66	62	67	62	59	62	58	55	53		
4	82	72	64	58	79	69	62	56	64	58	54	60	55	51	56	52	49	46		
5	76	64	56	50	73	62	55	49	58	52	47	54	49	45	51	46	43	40		
6	70	58	50	44	67	56	49	43	53	46	42	50	44	40	46	42	38	36		
7	65	53	45	39	63	51	44	39	48	42	37	45	40	36	43	38	34	32		
8	61	49	41	35	59	47	40	35	44	38	33	42	36	32	39	35	31	29		
9	57	45	37	32	55	43	36	31	41	35	30	39	33	29	37	32	28	26		
10	54	41	34	29	51	40	33	29	38	32	28	36	31	27	34	29	26	24		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	38319	38319	38319
5°	38063	38357	38723
10°	38133	38579	39059
15°	38123	38842	39295
20°	38139	38799	38527
25°	37933	37973	35799
30°	37675	35779	32365
35°	37381	32924	29229
40°	36636	30014	25821
45°	35200	26994	22555
50°	32760	24129	19306
55°	29968	21318	15651
60°	26863	18542	13501
65°	23492	15973	12004
70°	19204	14195	10881
75°	14947	12264	10012
80°	11139	10507	8833
85°	7540	7966	5039

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 35200 cd/sqm



TEST NUMBER: P855295

CATALOG NUMBER: SQ2-PW1-025U-100D-840-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.0	3.5
10°-20°	654.8	10.2
20°-30°	963.6	15.0
30°-40°	1053.6	16.4
40°-50°	945.1	14.7
50°-60°	705.0	11.0
60°-70°	445.5	6.9
70°-80°	220.7	3.4
80°-90°	52.1	0.8
90°-100°	76.2	1.2
100°-110°	237.1	3.7
110°-120°	231.9	3.6
120°-130°	189.3	2.9
130°-140°	154.9	2.4
140°-150°	120.9	1.9
150°-160°	87.2	1.4
160°-170°	53.3	0.8
170°-180°	18.0	0.3
0°-30°	1844.4	28.7
0°-40°	2898.0	45.0
0°-60°	4548.2	70.7
0°-90°	5266.6	81.8
90°-120°	545.2	8.5
90°-150°	1010.4	15.7
90°-180°	1169.0	18.2
0°-180°	6435.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2373	2373	2373	2373	2373	
5°	2348	2386	2367	2369	2389	223
15°	2281	2325	2324	2340	2351	644
25°	2129	2176	2132	2043	2010	981
35°	1896	1876	1670	1525	1483	1183
45°	1542	1418	1182	1034	988	1182
55°	1065	963	757	594	556	951
65°	615	564	418	336	314	609
75°	240	257	197	165	160	264
85°	41	52	43	29	27	52
90°	0	1	4	4	4	2
95°	10	31	140	52	34	12
105°	42	58	233	446	425	44
115°	74	88	190	391	458	73
125°	103	114	187	307	360	91
135°	124	137	186	265	298	96
145°	144	156	186	229	250	91
155°	165	171	187	206	213	76
165°	182	182	188	194	196	51
175°	188	188	188	190	188	18
180°	188	188	188	188	188	



TEST NUMBER: P855295

CATALOG NUMBER: SQ2-PW1-025U-100D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2373.3	2373.3	2373.3	2373.3	2373.3
2.5°	2357.1	2387.2	2368.0	2370.0	2375.2
5°	2348.5	2386.2	2366.6	2369.4	2389.2
7.5°	2336.7	2374.7	2360.3	2368.4	2387.9
10°	2325.9	2365.8	2353.1	2364.7	2382.4
12.5°	2311.5	2353.1	2344.0	2357.5	2375.2
15°	2280.7	2325.0	2323.7	2339.8	2350.8
17.5°	2245.0	2289.2	2287.1	2291.3	2296.5
20°	2219.7	2263.9	2258.1	2242.3	2242.3
22.5°	2183.5	2231.3	2216.5	2173.2	2159.1
25°	2129.3	2175.7	2131.5	2042.6	2009.5
27.5°	2066.0	2103.5	2014.9	1888.6	1842.6
30°	2020.8	2049.5	1919.1	1780.2	1736.0
32.5°	1973.7	1984.8	1821.4	1677.0	1629.2
35°	1896.5	1876.5	1670.4	1524.8	1482.9
37.5°	1805.1	1745.9	1525.3	1372.8	1326.3
40°	1738.2	1654.3	1424.0	1271.6	1225.1
42.5°	1664.1	1558.8	1328.2	1175.7	1127.5
45°	1541.6	1417.8	1182.2	1034.2	987.8
47.5°	1403.7	1280.8	1045.6	902.4	862.5
50°	1304.2	1184.9	960.6	817.2	768.6
52.5°	1202.9	1096.1	877.4	730.0	663.7
55°	1064.6	963.0	757.3	593.7	556.0
57.5°	922.2	834.3	648.3	499.7	468.8
60°	831.9	754.5	574.2	449.1	418.1
62.5°	745.0	676.5	501.8	402.2	376.5
65°	614.9	563.9	418.1	336.3	314.2
67.5°	488.2	460.0	347.6	275.9	261.3
70°	406.8	398.0	300.7	241.6	230.5
72.5°	336.3	339.8	255.5	209.2	201.6
75°	239.6	257.3	196.6	164.9	160.5
77.5°	163.2	189.7	145.6	122.0	118.4
80°	119.8	146.4	113.0	95.0	95.0
82.5°	83.7	104.9	80.4	71.4	71.4
85°	40.7	51.7	43.0	29.4	27.2
87.5°	10.8	16.4	7.9	6.1	6.1
90°	0.0	1.2	3.5	3.5	3.5
92.5°	3.7	12.9	44.2	14.5	11.8
95°	10.4	30.8	139.8	51.6	33.6
97.5°	19.0	40.0	231.6	144.2	90.8
100°	25.4	44.6	261.2	244.3	162.9
102.5°	31.9	50.2	255.6	348.8	273.9
105°	41.6	58.5	233.4	445.5	425.3
107.5°	51.3	67.1	212.1	453.0	475.4
110°	57.8	73.5	201.0	442.4	486.4



TEST NUMBER: P855295

CATALOG NUMBER: SQ2-PW1-025U-100D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	64.2	79.1	195.6	423.3	479.1
115°	74.0	87.5	189.5	390.9	457.5
117.5°	83.4	95.8	186.9	360.0	428.2
120°	88.9	101.4	186.0	342.4	407.9
122.5°	94.5	107.0	186.9	327.5	387.5
125°	102.8	114.1	187.2	307.4	360.5
127.5°	109.5	121.1	187.2	292.4	337.6
130°	113.3	125.6	187.2	284.0	324.7
132.5°	117.8	130.3	186.2	276.5	314.5
135°	123.6	137.2	186.0	265.4	298.1
137.5°	130.3	142.8	186.0	254.2	284.0
140°	134.0	146.5	186.0	246.7	273.9
142.5°	138.7	150.2	186.0	239.3	263.6
145°	144.4	155.7	186.0	229.2	249.6
147.5°	151.4	161.1	187.2	219.9	236.0
150°	155.9	163.9	187.2	215.2	227.6
152.5°	159.7	166.7	187.2	210.6	221.2
155°	165.3	170.8	187.2	205.8	212.6
157.5°	170.7	175.0	187.2	201.6	205.9
160°	174.5	177.8	187.2	198.8	202.2
162.5°	177.3	179.7	187.2	197.0	199.4
165°	181.5	182.5	188.3	194.2	196.4
167.5°	183.9	184.1	187.2	192.5	193.7
170°	184.8	186.0	187.2	190.7	191.8
172.5°	186.7	186.9	188.1	189.7	190.0
175°	188.3	188.3	188.3	189.5	188.3
177.5°	188.3	188.3	188.3	188.3	188.3
180°	188.3	188.3	188.3	188.3	188.3



TEST NUMBER: P855295

CATALOG NUMBER: SQ2-PW1-025U-100D-840-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	22.32	23.48	22.95	24.12	24.86	18.80	19.97	19.44	20.61	21.34
	3H	23.66	24.71	24.31	25.36	26.13	20.03	21.07	20.68	21.73	22.49
	4H	24.05	25.03	24.72	25.69	26.48	20.49	21.47	21.16	22.14	22.92
	6H	24.27	25.17	24.95	25.85	26.64	20.82	21.73	21.50	22.40	23.20
	8H	24.31	25.17	25.00	25.86	26.66	20.91	21.77	21.60	22.46	23.26
	12H	24.31	25.14	25.01	25.82	26.65	20.93	21.75	21.63	22.44	23.26
4H	2H	22.46	23.44	23.13	24.10	24.88	19.52	20.50	20.19	21.17	21.95
	3H	24.03	24.84	24.71	25.54	26.34	20.94	21.75	21.62	22.45	23.25
	4H	24.55	25.28	25.25	25.99	26.82	21.49	22.23	22.19	22.94	23.77
	6H	24.90	25.53	25.62	26.26	27.11	21.92	22.55	22.63	23.28	24.12
	8H	24.98	25.57	25.70	26.30	27.15	22.03	22.62	22.75	23.35	24.20
	12H	25.01	25.54	25.75	26.29	27.15	22.06	22.59	22.81	23.35	24.20
8H	4H	24.61	25.20	25.33	25.93	26.78	21.84	22.44	22.57	23.16	24.02
	6H	25.06	25.55	25.81	26.32	27.17	22.36	22.85	23.11	23.62	24.48
	8H	25.20	25.64	25.97	26.41	27.28	22.52	22.96	23.29	23.73	24.60
	12H	25.28	25.67	26.05	26.43	27.36	22.60	22.98	23.36	23.74	24.68
12H	4H	24.58	25.11	25.32	25.87	26.72	21.87	22.40	22.62	23.16	24.01
	6H	25.05	25.48	25.81	26.26	27.13	22.43	22.86	23.19	23.64	24.51
	8H	25.22	25.61	25.99	26.37	27.30	22.63	23.01	23.39	23.77	24.70