

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P855273

Luminaire Tested: SQ2-PW1-150U-050D-840-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P855273
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-14, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-150U-050D-840-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9714.7 lumens
Efficiency: N/A
Efficacy: 130.6 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 74.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P855273

CATALOG NUMBER: SQ2-PW1-150U-050D-840-UNV-STD-W-4

Luminous Intensity Polar Plot

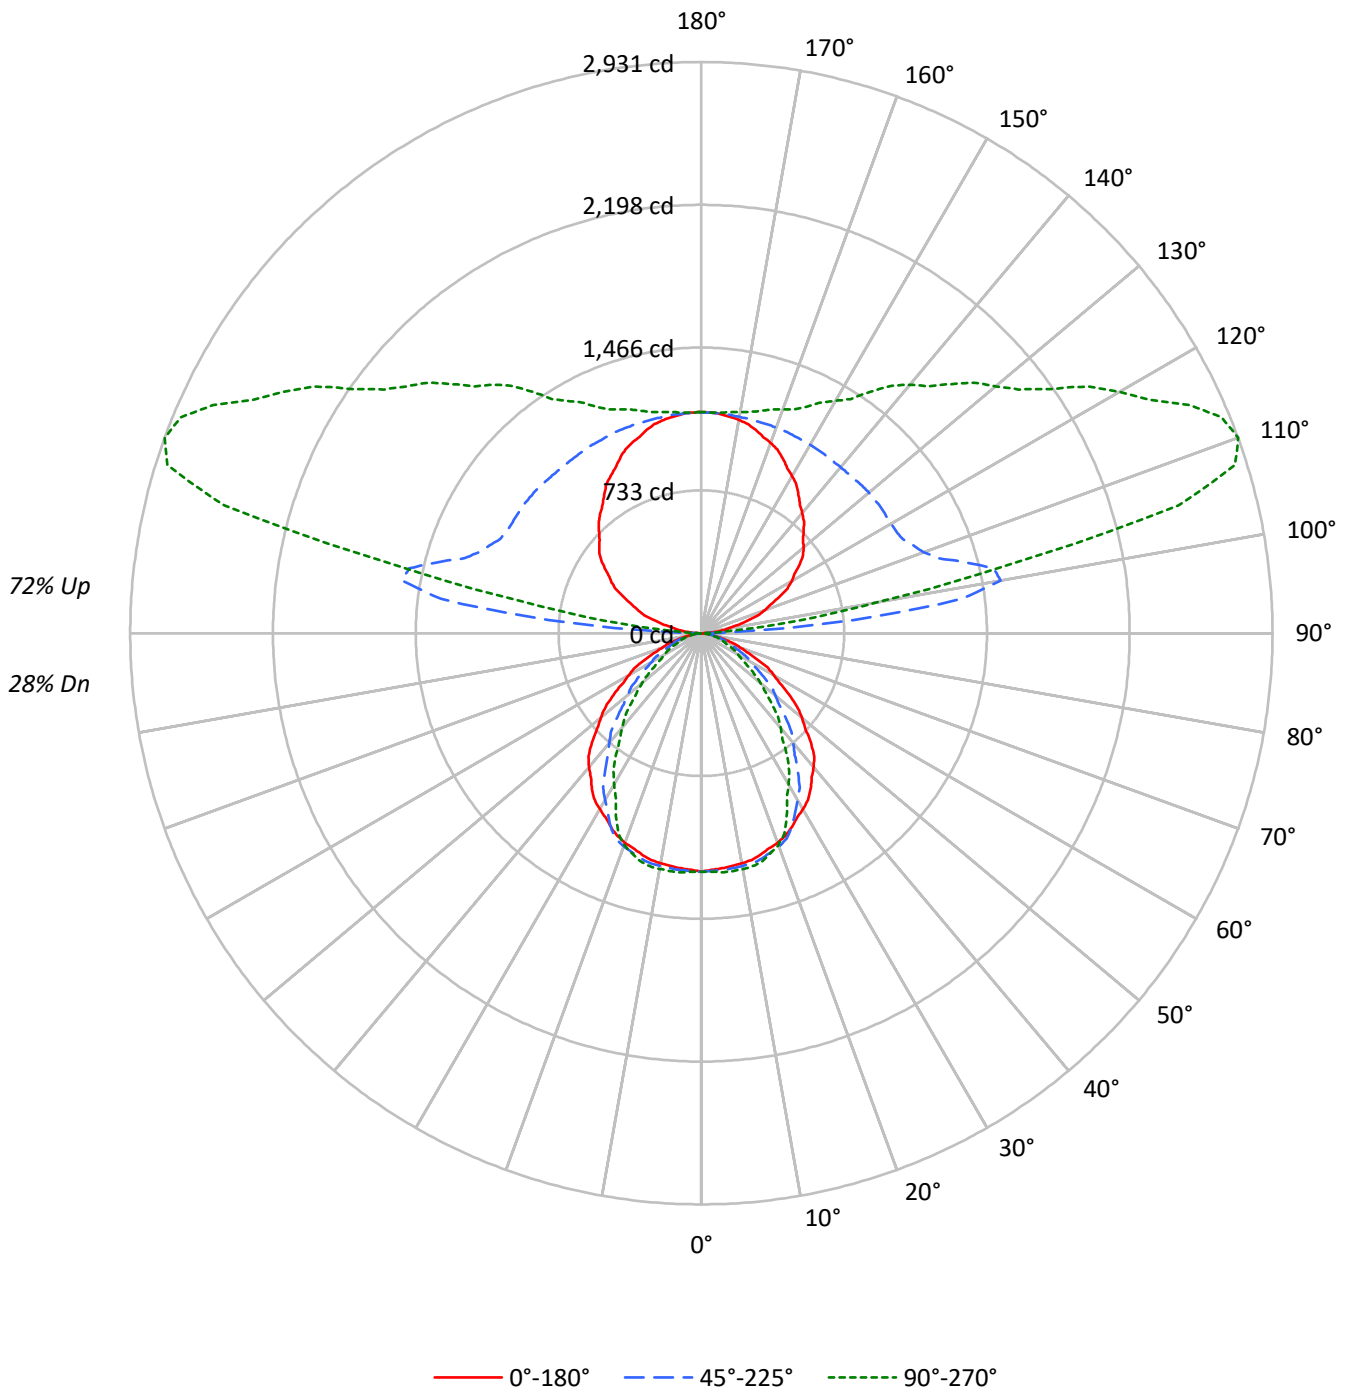



TEST NUMBER: P855273

CATALOG NUMBER: SQ2-PW1-150U-050D-840-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31	24
2	85	78	72	68	76	70	65	61	55	52	49	41	39	38	29	28	26	21
3	78	69	62	57	69	62	56	52	49	45	42	37	34	32	26	24	23	18
4	71	61	54	48	64	55	49	44	44	39	36	33	30	28	23	21	20	16
5	65	54	47	41	58	49	43	38	39	34	31	30	27	24	21	19	18	14
6	60	49	41	36	54	44	37	33	35	30	27	27	24	21	19	17	16	12
7	56	44	36	31	50	40	33	29	32	27	24	24	21	19	17	15	14	11
8	51	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	12	10
9	48	36	29	24	43	33	27	22	27	22	19	21	17	15	15	13	11	9
10	45	33	26	22	40	30	24	20	24	20	17	19	16	14	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19758	19758	19758
5°	19626	19776	19964
10°	19661	19890	20138
15°	19656	20025	20259
20°	19663	20003	19864
25°	19557	19579	18456
30°	19425	18446	16686
35°	19273	16975	15069
40°	18889	15475	13312
45°	18148	13917	11629
50°	16890	12441	9952
55°	15451	10990	8070
60°	13850	9558	6962
65°	12111	8237	6189
70°	9904	7317	5613
75°	7704	6326	5159
80°	5746	5421	4547
85°	3890	4094	2594

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18148 cd/sqm



TEST NUMBER: P855273

CATALOG NUMBER: SQ2-PW1-150U-050D-840-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.5	1.2
10°-20°	337.6	3.5
20°-30°	496.8	5.1
30°-40°	543.2	5.6
40°-50°	487.3	5.0
50°-60°	363.5	3.7
60°-70°	229.7	2.4
70°-80°	113.8	1.2
80°-90°	27.9	0.3
90°-100°	432.0	4.4
100°-110°	1414.7	14.6
110°-120°	1398.6	14.4
120°-130°	1143.3	11.8
130°-140°	933.0	9.6
140°-150°	726.1	7.5
150°-160°	522.8	5.4
160°-170°	319.8	3.3
170°-180°	108.1	1.1
0°-30°	951.0	9.8
0°-40°	1494.2	15.4
0°-60°	2345.0	24.1
0°-90°	2716.4	28.0
90°-120°	3245.3	33.4
90°-150°	6047.6	62.3
90°-180°	6998.0	72.0
0°-180°	9714.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1224	1224	1224	1224	1224	
5°	1211	1230	1220	1222	1232	115
15°	1176	1199	1198	1206	1212	332
25°	1098	1122	1099	1053	1036	506
35°	978	968	861	786	764	610
45°	795	731	610	533	509	609
55°	549	496	390	306	287	490
65°	317	291	216	173	162	314
75°	124	133	101	85	83	136
85°	21	27	22	15	14	27
90°	1	4	9	8	9	4
95°	61	176	786	280	182	69
105°	246	351	1404	2668	2534	259
115°	443	529	1141	2358	2768	437
125°	616	687	1124	1859	2184	548
135°	742	821	1115	1604	1807	574
145°	868	932	1113	1379	1511	544
155°	989	1022	1120	1234	1282	455
165°	1080	1090	1124	1168	1180	304
175°	1129	1129	1130	1138	1136	107
180°	1134	1134	1134	1134	1134	



TEST NUMBER: P855273

CATALOG NUMBER: SQ2-PW1-150U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1223.7	1223.7	1223.7	1223.7	1223.7
2.5°	1215.3	1230.8	1220.9	1221.9	1224.6
5°	1210.9	1230.2	1220.2	1221.6	1231.8
7.5°	1204.8	1224.4	1216.9	1221.1	1231.1
10°	1199.2	1219.7	1213.2	1219.2	1228.3
12.5°	1191.7	1213.2	1208.5	1215.5	1224.6
15°	1175.9	1198.7	1198.0	1206.3	1212.0
17.5°	1157.5	1180.3	1179.2	1181.4	1184.0
20°	1144.4	1167.3	1164.2	1156.1	1156.1
22.5°	1125.8	1150.4	1142.8	1120.5	1113.2
25°	1097.8	1121.7	1099.0	1053.2	1036.0
27.5°	1065.2	1084.5	1038.8	973.7	950.0
30°	1041.9	1056.7	989.4	917.9	895.0
32.5°	1017.6	1023.3	939.1	864.6	840.0
35°	977.8	967.5	861.2	786.2	764.5
37.5°	930.7	900.2	786.4	707.7	683.9
40°	896.2	853.0	734.2	655.5	631.6
42.5°	858.0	803.8	684.8	606.1	581.3
45°	794.8	731.1	609.5	533.2	509.3
47.5°	723.7	660.3	539.1	465.2	444.7
50°	672.4	610.9	495.3	421.3	396.2
52.5°	620.2	565.1	452.4	376.3	342.2
55°	548.9	496.5	390.4	306.0	286.7
57.5°	475.5	430.1	334.2	257.7	241.7
60°	428.9	389.0	296.0	231.6	215.6
62.5°	384.1	348.8	258.7	207.3	194.2
65°	317.0	290.8	215.6	173.4	162.0
67.5°	251.7	237.2	179.2	142.3	134.7
70°	209.8	205.2	155.0	124.6	118.9
72.5°	173.4	175.3	131.7	107.8	104.0
75°	123.5	132.6	101.4	85.1	82.7
77.5°	84.1	97.8	75.1	62.9	61.1
80°	61.8	75.4	58.3	48.9	48.9
82.5°	43.1	54.1	41.5	36.8	36.8
85°	21.0	26.7	22.1	15.2	14.0
87.5°	5.8	9.0	5.6	4.4	4.7
90°	1.2	3.5	9.3	8.2	9.3
92.5°	19.8	72.3	221.9	72.1	57.8
95°	60.6	175.6	785.5	279.8	181.8
97.5°	110.0	231.7	1347.6	815.2	505.3
100°	144.5	260.7	1559.2	1392.4	922.9
102.5°	183.7	297.2	1535.9	2051.7	1590.4
105°	245.9	350.7	1404.2	2667.8	2534.5
107.5°	307.2	403.3	1275.8	2725.5	2872.0
110°	347.3	440.8	1214.2	2658.4	2930.8



TEST NUMBER: P855273

CATALOG NUMBER: SQ2-PW1-150U-050D-840-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	385.5	476.2	1176.9	2541.7	2890.7
115°	442.9	529.4	1140.8	2357.5	2767.6
117.5°	498.6	579.4	1127.1	2176.3	2592.8
120°	534.9	611.3	1123.3	2070.7	2476.2
122.5°	567.6	642.0	1123.3	1979.6	2356.1
125°	616.5	687.1	1124.5	1859.0	2183.8
127.5°	658.0	729.9	1123.1	1770.2	2052.9
130°	684.1	756.9	1122.2	1716.5	1971.7
132.5°	707.4	782.1	1119.4	1670.3	1901.8
135°	742.4	820.9	1115.2	1603.5	1807.4
137.5°	779.2	857.0	1112.6	1533.8	1718.2
140°	805.2	880.5	1111.7	1489.7	1664.1
142.5°	831.3	902.0	1111.7	1442.8	1600.7
145°	868.1	932.0	1112.8	1379.3	1511.4
147.5°	906.8	959.9	1114.5	1324.0	1423.8
150°	931.0	977.8	1116.3	1292.0	1376.2
152.5°	955.3	996.5	1117.3	1265.5	1335.2
155°	989.3	1022.4	1119.8	1234.0	1281.8
157.5°	1019.8	1043.8	1122.4	1209.2	1243.8
160°	1039.4	1058.9	1123.3	1195.1	1222.4
162.5°	1056.2	1071.9	1123.3	1183.7	1203.7
165°	1080.2	1090.5	1124.5	1168.0	1180.4
167.5°	1100.5	1105.5	1125.9	1155.7	1162.5
170°	1111.7	1114.0	1126.8	1149.1	1151.3
172.5°	1120.1	1121.5	1129.6	1144.3	1144.8
175°	1129.2	1129.2	1130.3	1138.5	1136.1
177.5°	1133.8	1132.9	1132.0	1137.5	1133.8
180°	1133.8	1133.8	1133.8	1133.8	1133.8

TEST NUMBER: P855273

CATALOG NUMBER: SQ2-PW1-150U-050D-840-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.90	15.57	16.03	16.69	18.25	11.38	12.06	12.52	13.18	14.74
	3H	16.21	16.81	17.35	17.94	19.51	12.58	13.18	13.72	14.31	15.88
	4H	16.57	17.14	17.72	18.27	19.85	13.01	13.59	14.16	14.71	16.29
	6H	16.77	17.29	17.92	18.42	20.01	13.32	13.85	14.48	14.98	16.57
	8H	16.79	17.29	17.95	18.44	20.02	13.39	13.89	14.55	15.04	16.62
	12H	16.78	17.26	17.95	18.40	20.00	13.40	13.87	14.56	15.01	16.61
4H	2H	14.98	15.55	16.14	16.68	18.26	12.04	12.62	13.20	13.74	15.32
	3H	16.51	16.98	17.67	18.14	19.73	13.42	13.89	14.58	15.05	16.63
	4H	17.01	17.44	18.17	18.59	20.20	13.95	14.39	15.12	15.53	17.14
	6H	17.33	17.70	18.50	18.87	20.47	14.35	14.72	15.52	15.89	17.49
	8H	17.40	17.75	18.57	18.91	20.53	14.45	14.80	15.62	15.96	17.57
	12H	17.41	17.73	18.59	18.90	20.52	14.46	14.78	15.65	15.95	17.57
8H	4H	17.03	17.38	18.20	18.54	20.15	14.27	14.62	15.44	15.77	17.39
	6H	17.46	17.75	18.65	18.95	20.56	14.77	15.05	15.95	16.25	17.87
	8H	17.61	17.86	18.80	19.03	20.67	14.93	15.18	16.12	16.36	17.99
	12H	17.67	17.89	18.86	19.06	20.73	14.98	15.20	16.18	16.38	18.04
12H	4H	16.98	17.30	18.17	18.47	20.09	14.27	14.59	15.46	15.76	17.38
	6H	17.45	17.70	18.65	18.88	20.51	14.83	15.08	16.02	16.26	17.89
	8H	17.61	17.83	18.80	19.00	20.67	15.01	15.23	16.20	16.40	18.07