

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P853616

Luminaire Tested: SQ2-BBN-0U-100D-940-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P853616  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2308-130-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-BBN-0U-100D-940-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4242.5 lumens  
Efficiency: N/A  
Efficacy: 111.4 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.62  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 38.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P853616

CATALOG NUMBER: SQ2-BBN-0U-100D-940-UNV-STD-W-4

### Luminous Intensity Polar Plot

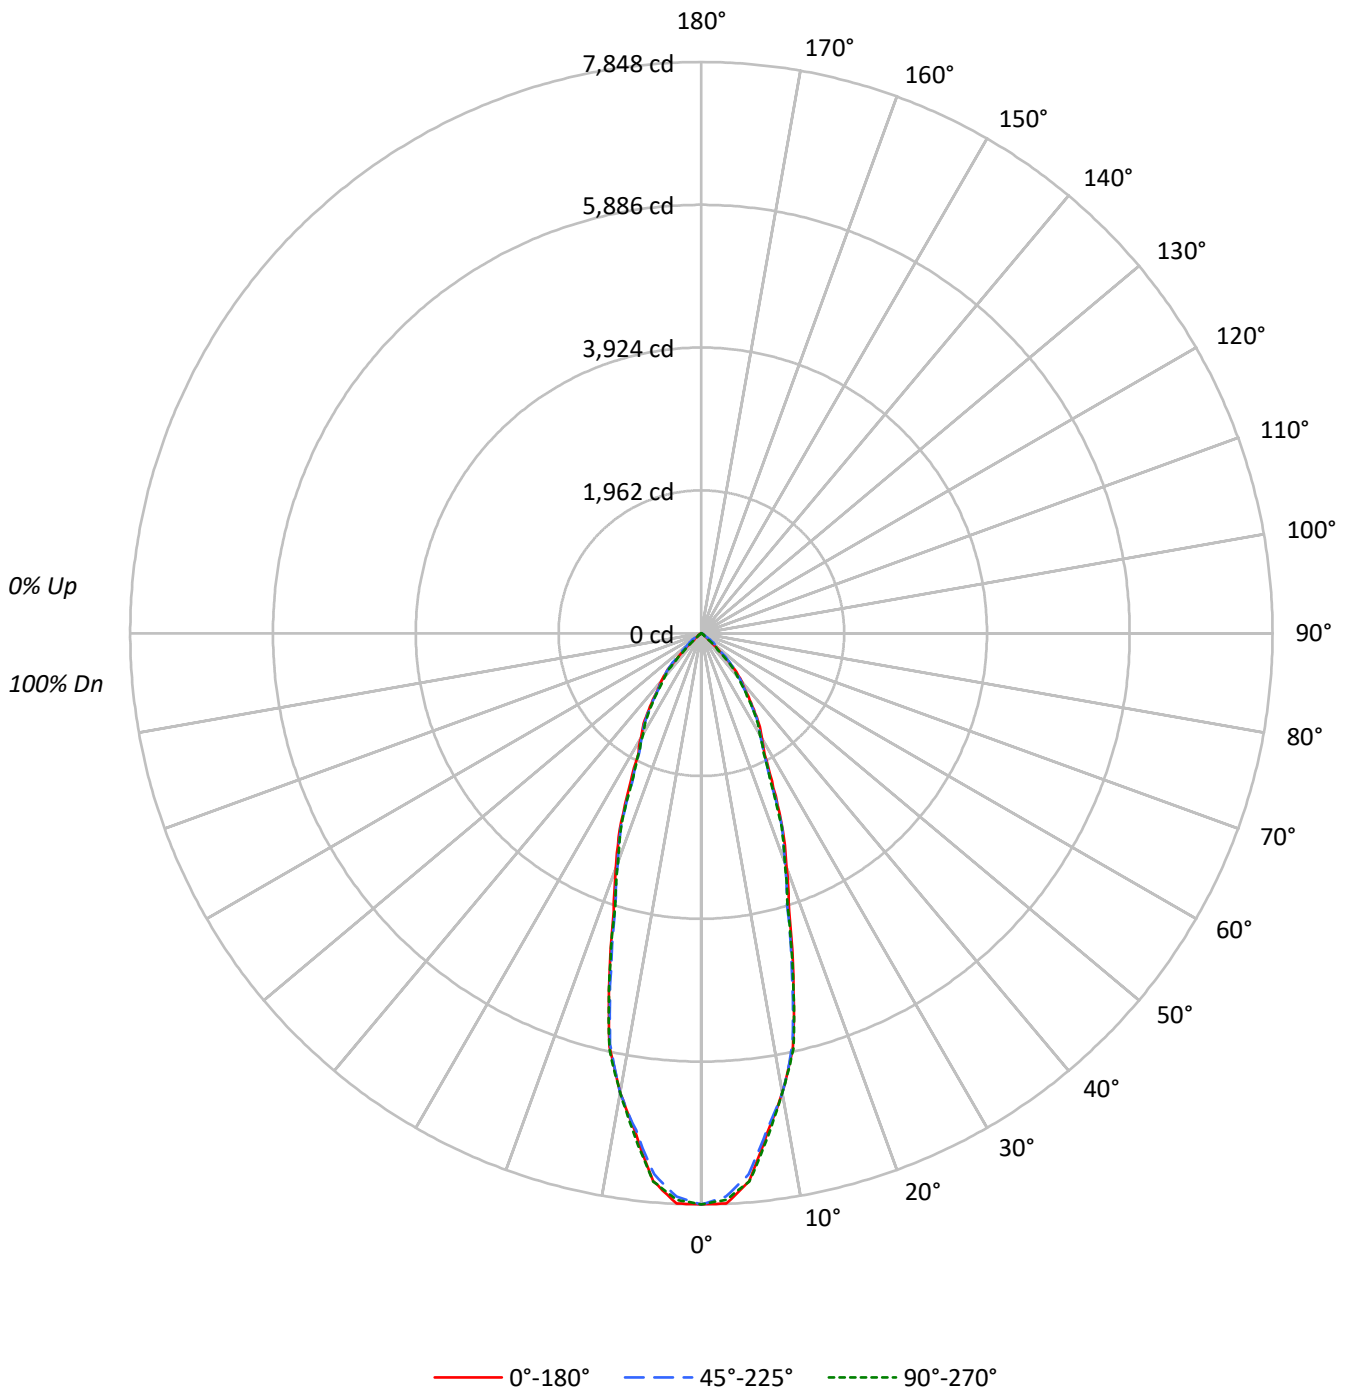



TEST NUMBER: P853616

CATALOG NUMBER: SQ2-BBN-0U-100D-940-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	82
4	98	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71	77	73	70	76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66	74	69	66	72	69	66	64
8	82	73	67	63	80	72	67	63	71	66	63	70	66	62	69	65	62	61
9	78	69	63	60	77	69	63	60	68	63	59	67	62	59	66	62	59	58
10	75	66	60	57	74	65	60	57	64	60	56	64	59	56	63	59	56	55

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	126719	126719	126719
5°	122480	120968	122550
10°	105114	105183	105114
15°	81588	80287	81399
20°	58883	57668	57620
25°	41751	40089	40164
30°	31062	30272	29983
35°	24171	23558	23055
40°	17886	17439	16337
45°	9140	11207	7364
50°	1989	6182	1457
55°	557	2508	439
60°	90	504	45
65°	0	53	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°  
 Vertical Angle: 45°  
 Luminance: 11207 cd/sqm



TEST NUMBER: P853616

CATALOG NUMBER: SQ2-BBN-0U-100D-940-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	678.7	16.0
10°-20°	1338.0	31.5
20°-30°	1079.3	25.4
30°-40°	749.8	17.7
40°-50°	346.4	8.2
50°-60°	48.6	1.1
60°-70°	1.7	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3096.0	73.0
0°-40°	3845.8	90.6
0°-60°	4240.8	100.0
0°-90°	4242.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4242.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	7848	7848	7848	7848	7848	
5°	7557	7517	7464	7556	7561	679
15°	4881	4943	4803	4871	4870	1344
25°	2344	2291	2250	2284	2254	1097
35°	1226	1226	1195	1174	1170	767
45°	400	478	491	446	322	323
55°	20	31	89	25	16	25
65°	0	0	1	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P853616

CATALOG NUMBER: SQ2-BBN-0U-100D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	7848.4	7848.4	7848.4	7848.4	7848.4
2.5°	7843.9	7815.1	7746.6	7808.4	7789.6
5°	7557.0	7516.9	7463.7	7555.7	7561.3
7.5°	6924.0	6937.0	6887.5	6989.1	6978.3
10°	6411.4	6421.1	6415.6	6448.7	6411.4
12.5°	5817.3	5855.8	5783.1	5834.4	5850.2
15°	4881.0	4943.3	4803.2	4871.1	4869.7
17.5°	4003.0	3996.6	3924.3	3937.0	3932.8
20°	3427.0	3417.4	3356.3	3346.6	3353.5
22.5°	2933.7	2917.4	2895.8	2871.4	2880.5
25°	2343.6	2291.1	2250.3	2283.6	2254.5
27.5°	1881.1	1880.3	1846.6	1850.4	1856.0
30°	1666.1	1656.5	1623.7	1624.7	1608.2
32.5°	1474.9	1481.8	1441.5	1433.5	1416.9
35°	1226.3	1226.3	1195.2	1173.8	1169.7
37.5°	995.7	993.2	971.1	940.9	930.1
40°	848.6	841.7	827.4	790.3	775.1
42.5°	681.2	699.7	686.0	648.7	625.7
45°	400.3	477.7	490.8	445.6	322.5
47.5°	172.0	257.2	327.6	213.5	111.2
50°	79.2	145.6	246.1	105.0	58.0
52.5°	46.4	79.6	182.7	61.4	36.5
55°	19.8	30.9	89.1	25.2	15.6
57.5°	7.4	13.4	33.7	10.9	5.9
60°	2.8	5.6	15.6	4.2	1.4
62.5°	0.6	2.2	7.6	1.9	0.3
65°	0.0	0.0	1.4	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

-----



TEST NUMBER: P853616

CATALOG NUMBER: SQ2-BBN-0U-100D-940-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00