

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P853772

Luminaire Tested: SQ2-FA-075U-100D-940-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P853772
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-11)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FA-075U-100D-940-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7107.6 lumens
Efficiency: N/A
Efficacy: 116.7 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 0.95 / 0.95
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

Luminous Intensity Polar Plot

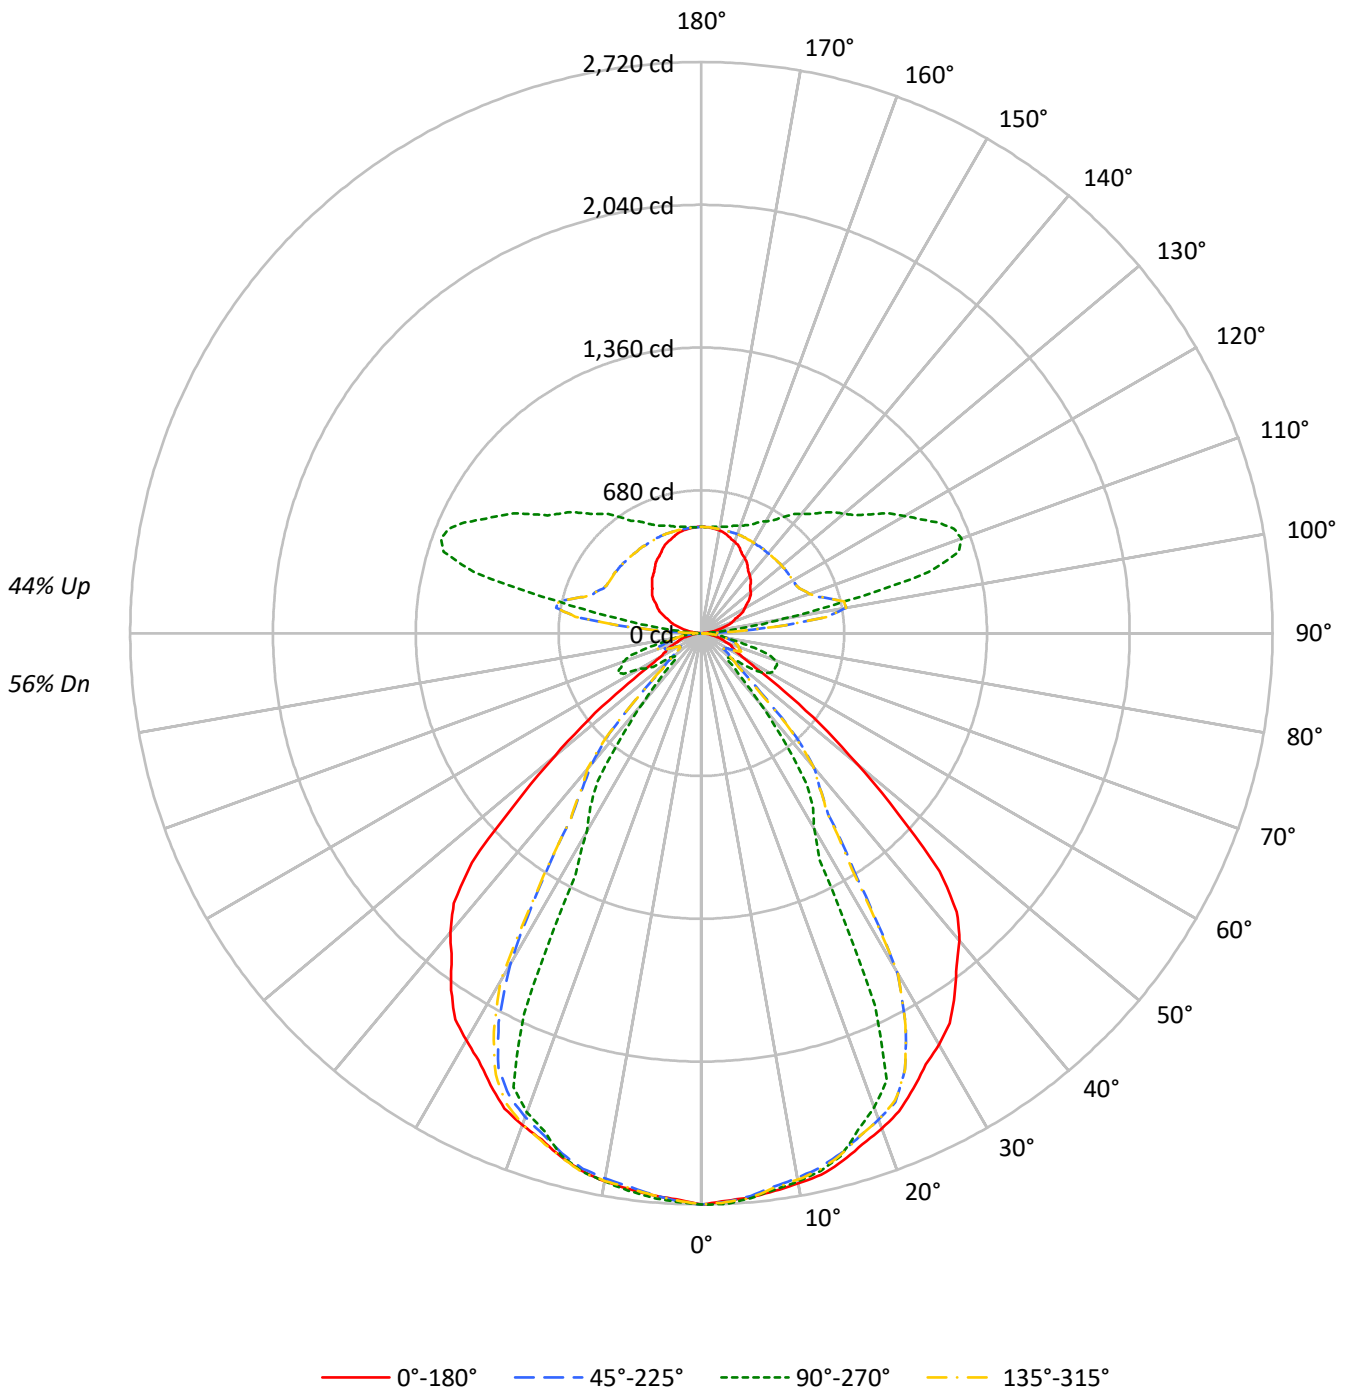



TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56				56
1	100	96	93	90	93	90	87	84	78	76	74	67	65	64	56	55	54				49	
2	92	86	80	76	86	80	75	71	70	66	63	60	58	55	51	49	48				44	
3	85	77	70	65	79	72	66	62	63	59	55	55	52	49	47	45	43				39	
4	79	69	62	57	74	65	59	54	57	52	49	50	46	43	43	41	38				35	
5	73	63	55	50	68	59	53	48	52	47	43	46	42	39	40	37	35				32	
6	68	57	50	45	64	54	47	43	48	43	39	42	38	35	37	34	32				29	
7	64	52	45	40	60	50	43	38	44	39	35	39	35	32	34	31	29				27	
8	60	48	41	36	56	46	39	35	41	36	32	36	32	29	32	29	27				25	
9	56	45	38	33	52	42	36	32	38	33	29	34	30	27	30	27	25				23	
10	53	41	35	30	49	39	33	29	35	30	27	32	28	25	28	25	23				21	

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	43923	43923	43923	43923
5°	43692	43759	43527	43726
10°	43625	43458	43458	43458
15°	43483	43039	43141	43039
20°	43148	41314	42830	41701
25°	42580	34867	42287	35600
30°	42189	20005	41730	20273
35°	41449	17186	40923	16943
40°	40301	9038	39178	8951
45°	36634	3889	35321	3889
50°	24169	4690	22933	4381
55°	13515	8662	12822	7854
60°	7288	12190	7156	10931
65°	6426	14816	6739	16852
70°	6005	17722	5712	18694
75°	5633	15228	5758	15739
80°	4770	10869	4770	11446
85°	4187	6076	3798	7225

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 36634 cd/sqm



TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	256.0	3.6
10°-20°	726.3	10.2
20°-30°	990.3	13.9
30°-40°	832.2	11.7
40°-50°	472.7	6.7
50°-60°	250.8	3.5
60°-70°	230.9	3.2
70°-80°	169.5	2.4
80°-90°	44.8	0.6
90°-100°	191.4	2.7
100°-110°	634.6	8.9
110°-120°	629.9	8.9
120°-130°	513.0	7.2
130°-140°	417.0	5.9
140°-150°	323.8	4.6
150°-160°	233.3	3.3
160°-170°	142.9	2.0
170°-180°	48.3	0.7
0°-30°	1972.6	27.8
0°-40°	2804.8	39.5
0°-60°	3528.2	49.6
0°-90°	3973.4	55.9
90°-120°	1456.0	20.5
90°-150°	2709.8	38.1
90°-180°	3134.0	44.1
0°-180°	7107.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2720	2720	2720	2720	2720	
5°	2696	2700	2686	2698	2696	256
15°	2601	2575	2581	2575	2601	733
25°	2390	1957	2374	1998	2390	1102
35°	2103	872	2076	860	2103	1313
45°	1604	170	1547	170	1604	1173
55°	480	308	456	279	480	462
65°	168	388	176	441	168	169
75°	90	244	92	252	90	93
85°	23	33	20	39	23	25
90°	0	4	0	4	0	2
95°	27	83	27	83	27	31
105°	111	1120	111	1120	111	117
115°	198	1245	198	1245	198	196
125°	277	986	277	986	277	246
135°	331	810	331	810	331	256
145°	385	676	385	676	385	241
155°	439	572	439	572	439	202
165°	482	527	482	527	482	136
175°	504	507	504	507	504	48
180°	506	506	506	506	506	



TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	2720.4	2720.4	2720.4	2720.4	2720.4	2720.4	2720.4	2720.4	2720.4	2720.4	2720.4
2.5°	2705.7	2745.8	2710.6	2706.0	2720.4	2717.2	2712.2	2731.2	2699.1	2731.2	2705.7
5°	2695.8	2741.9	2689.7	2675.8	2699.9	2683.9	2697.9	2725.7	2685.6	2721.7	2681.4
7.5°	2679.0	2719.9	2657.2	2648.3	2672.0	2658.0	2663.8	2702.4	2668.7	2692.4	2656.0
10°	2660.9	2697.0	2634.3	2628.6	2650.7	2636.6	2642.5	2682.8	2650.7	2672.7	2636.3
12.5°	2641.2	2669.3	2606.4	2603.9	2622.8	2613.5	2616.2	2650.1	2624.4	2646.5	2611.7
15°	2601.4	2627.5	2564.5	2554.7	2574.8	2566.7	2570.7	2601.0	2580.9	2595.0	2564.5
17.5°	2552.2	2573.1	2510.3	2480.8	2481.6	2491.7	2510.3	2546.9	2528.8	2547.3	2504.2
20°	2511.2	2535.2	2466.0	2408.5	2404.5	2414.5	2466.0	2502.7	2492.7	2512.8	2451.7
22.5°	2463.6	2479.6	2416.8	2319.6	2306.0	2316.0	2410.2	2453.6	2450.0	2463.7	2387.7
25°	2390.1	2406.2	2291.6	2151.8	1957.2	2139.8	2295.7	2373.7	2373.7	2385.7	2285.5
27.5°	2315.4	2315.8	2108.6	1382.0	1219.1	1332.2	2105.8	2274.8	2294.1	2288.1	2091.0
30°	2262.9	2248.9	1869.0	1117.1	1073.0	1101.1	1871.1	2206.2	2238.3	2216.2	1821.8
32.5°	2202.2	2162.5	1379.9	1027.0	990.9	1015.8	1334.4	2124.7	2180.9	2133.1	1432.8
35°	2102.9	1998.6	1052.5	908.0	871.9	904.0	1044.3	1963.9	2076.2	1947.8	1087.4
37.5°	1995.8	1588.6	926.5	723.3	645.4	707.6	922.0	1571.6	1952.3	1535.1	925.7
40°	1912.1	1248.1	833.0	529.1	428.8	499.0	826.8	1190.8	1858.8	1281.0	812.4
42.5°	1800.5	1096.4	668.8	336.0	263.0	307.5	641.3	1071.0	1743.9	1110.0	646.7
45°	1604.4	942.4	396.0	184.3	170.3	178.3	365.2	925.0	1546.9	905.0	404.2
47.5°	1270.8	718.7	254.4	156.7	171.9	156.7	246.6	695.9	1200.2	694.7	254.0
50°	962.2	561.0	197.0	158.6	186.7	158.6	190.8	541.9	913.0	592.0	194.9
52.5°	712.7	468.8	160.8	173.9	224.4	177.1	156.3	456.4	676.6	477.6	152.2
55°	480.1	367.7	129.3	229.5	307.7	235.5	129.3	357.2	455.5	353.1	125.1
57.5°	304.5	273.6	130.9	295.1	351.2	300.7	132.9	263.7	292.1	264.9	114.9
60°	225.7	215.6	145.7	313.3	377.5	317.3	147.7	207.5	221.6	205.5	123.1
62.5°	186.3	169.8	175.2	339.3	392.3	330.5	178.9	162.0	193.7	155.2	136.2
65°	168.2	110.1	207.2	343.6	387.8	343.6	209.3	104.2	176.4	112.2	184.6
67.5°	151.8	81.6	200.2	341.3	390.2	342.1	195.3	77.9	145.7	75.9	188.7
70°	127.2	73.0	188.7	347.4	375.4	335.3	188.7	70.9	121.0	68.9	221.6
72.5°	105.9	69.4	175.6	320.7	332.8	308.7	177.3	69.0	106.3	62.1	208.4
75°	90.3	68.2	168.2	256.2	244.1	244.1	164.1	66.2	92.3	62.2	162.1
77.5°	67.7	60.5	139.5	167.2	158.0	158.0	137.0	58.4	64.4	54.8	131.7
80°	51.3	55.3	114.9	123.0	116.9	116.9	110.8	53.3	51.3	51.3	108.7
82.5°	39.8	47.0	88.6	90.2	85.8	84.2	86.2	46.6	39.8	43.0	84.1
85°	22.6	32.6	47.2	38.8	32.8	30.8	45.1	30.5	20.5	30.5	45.1
87.5°	8.2	14.8	7.2	7.4	7.4	7.4	7.2	14.8	8.2	13.2	8.8
90°	0.0	1.0	3.1	4.2	4.2	4.2	3.1	1.0	0.0	1.0	3.1
92.5°	8.4	32.4	95.4	30.9	26.0	30.9	95.4	32.4	8.4	32.4	95.4
95°	27.2	80.5	346.9	123.8	82.8	123.8	346.9	80.5	27.2	80.5	346.9
97.5°	50.1	105.8	605.6	353.2	223.2	353.2	605.6	105.8	50.1	105.8	605.6
100°	66.0	119.3	701.2	602.2	399.3	602.2	701.2	119.3	66.0	119.3	701.2
102.5°	83.6	135.3	695.3	920.3	695.3	920.3	695.3	135.3	83.6	135.3	695.3
105°	111.1	158.2	635.1	1198.3	1120.4	1198.3	635.1	158.2	111.1	158.2	635.1
107.5°	139.2	181.2	577.5	1226.5	1285.8	1226.5	577.5	181.2	139.2	181.2	577.5
110°	155.1	197.1	548.1	1198.6	1318.5	1198.6	548.1	197.1	155.1	197.1	548.1



TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	171.9	213.1	530.5	1149.0	1301.7	1149.0	530.5	213.1	171.9	213.1	530.5
115°	198.1	237.0	511.5	1064.8	1245.1	1064.8	511.5	237.0	198.1	237.0	511.5
117.5°	224.1	258.7	504.5	984.2	1173.4	984.2	504.5	258.7	224.1	258.7	504.5
120°	240.0	273.8	502.0	933.8	1117.2	933.8	502.0	273.8	240.0	273.8	502.0
122.5°	254.3	287.3	502.0	892.4	1061.9	892.4	502.0	287.3	254.3	287.3	502.0
125°	276.7	307.4	502.0	836.6	986.2	836.6	502.0	307.4	276.7	307.4	502.0
127.5°	295.1	325.3	500.8	794.4	922.3	794.4	500.8	325.3	295.1	325.3	500.8
130°	306.0	337.8	499.9	769.8	884.6	769.8	499.9	337.8	306.0	337.8	499.9
132.5°	316.1	348.7	499.1	749.4	852.7	749.4	499.1	348.7	316.1	348.7	499.1
135°	331.2	365.0	497.8	717.9	810.2	717.9	497.8	365.0	331.2	365.0	497.8
137.5°	347.5	380.1	496.6	687.5	768.9	687.5	496.6	380.1	347.5	380.1	496.6
140°	358.4	390.2	495.7	667.2	742.0	667.2	495.7	390.2	358.4	390.2	495.7
142.5°	368.5	399.5	496.6	646.9	713.5	646.9	496.6	399.5	368.5	399.5	496.6
145°	384.6	413.3	496.8	617.6	676.0	617.6	496.8	413.3	384.6	413.3	496.8
147.5°	402.0	426.0	497.0	592.7	636.2	592.7	497.0	426.0	402.0	426.0	497.0
150°	412.9	434.5	497.8	578.3	615.2	578.3	497.8	434.5	412.9	434.5	497.8
152.5°	423.0	443.7	498.7	566.4	595.9	566.4	498.7	443.7	423.0	443.7	498.7
155°	439.1	454.5	499.9	551.8	572.2	551.8	499.9	454.5	439.1	454.5	499.9
157.5°	454.9	466.8	501.2	541.3	555.9	541.3	501.2	466.8	454.9	466.8	501.2
160°	463.2	473.5	502.0	533.7	545.0	533.7	502.0	473.5	463.2	473.5	502.0
162.5°	471.6	479.4	502.0	528.6	537.5	528.6	502.0	479.4	471.6	479.4	502.0
165°	482.1	487.2	502.0	522.1	527.2	522.1	502.0	487.2	482.1	487.2	502.0
167.5°	491.8	494.4	503.1	516.1	518.8	516.1	503.1	494.4	491.8	494.4	503.1
170°	496.8	497.8	503.1	513.6	514.6	513.6	503.1	497.8	496.8	497.8	503.1
172.5°	500.1	501.2	503.9	511.0	511.3	511.0	503.9	501.2	500.1	501.2	503.9
175°	504.1	504.1	505.2	508.3	507.3	508.3	505.2	504.1	504.1	504.1	505.2
177.5°	506.2	506.2	505.4	507.0	505.4	507.0	505.4	506.2	506.2	506.2	505.4
180°	506.2	506.2	506.2	506.2	506.2	506.2	506.2	506.2	506.2	506.2	506.2



TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	2720.4	2720.4	2720.4	2720.4	2720.4	2720.4
2.5°	2699.3	2710.6	2710.6	2704.0	2736.1	2705.7
5°	2671.8	2697.9	2685.8	2685.6	2725.9	2695.8
7.5°	2652.5	2676.9	2665.7	2663.4	2703.1	2679.0
10°	2632.6	2650.7	2642.7	2648.6	2685.0	2660.9
12.5°	2604.8	2626.1	2618.0	2627.3	2660.5	2641.2
15°	2556.7	2574.8	2578.8	2583.0	2621.5	2601.4
17.5°	2477.3	2486.1	2506.2	2534.6	2574.7	2552.2
20°	2415.0	2427.0	2439.1	2488.6	2535.2	2511.2
22.5°	2344.1	2340.1	2368.1	2426.2	2484.4	2463.6
25°	2152.7	1998.3	2168.8	2318.3	2396.1	2390.1
27.5°	1498.9	1300.7	1476.0	2139.8	2303.4	2315.4
30°	1179.6	1087.4	1177.6	1910.0	2234.8	2262.9
32.5°	1047.3	984.0	1038.9	1453.8	2148.4	2202.2
35°	903.8	859.6	903.8	1087.4	1978.5	2102.9
37.5°	723.4	633.1	721.8	939.6	1599.4	1995.8
40°	539.0	424.7	523.0	841.2	1278.2	1912.1
42.5°	359.1	273.7	339.9	662.3	1105.6	1800.5
45°	194.4	170.3	186.3	400.1	902.3	1604.4
47.5°	152.4	161.3	152.4	252.3	690.2	1270.8
50°	146.3	174.4	146.3	194.9	571.0	962.2
52.5°	159.5	189.2	157.9	153.9	466.0	712.7
55°	180.7	279.0	182.7	125.1	341.7	480.1
57.5°	257.3	313.9	260.1	118.6	263.1	304.5
60°	264.3	338.5	262.3	125.1	203.6	225.7
62.5°	312.6	418.9	312.2	143.2	151.4	186.3
65°	401.0	441.1	405.0	182.6	108.1	168.2
67.5°	380.6	409.1	376.6	195.7	74.4	151.8
70°	373.9	396.0	369.9	223.6	69.0	127.2
72.5°	348.8	351.6	341.6	207.2	62.1	105.9
75°	270.4	252.3	260.4	178.5	62.2	90.3
77.5°	168.1	160.8	162.0	136.2	54.9	67.7
80°	127.1	123.1	121.1	114.9	51.3	51.3
82.5°	94.3	90.3	88.3	88.6	43.0	39.8
85°	43.0	39.0	37.0	51.3	30.6	22.6
87.5°	9.0	9.0	7.4	8.8	11.6	8.2
90°	4.2	4.2	4.2	3.1	1.0	0.0
92.5°	30.9	26.0	30.9	95.4	32.4	8.4
95°	123.8	82.8	123.8	346.9	80.5	27.2
97.5°	353.2	223.2	353.2	605.6	105.8	50.1
100°	602.2	399.3	602.2	701.2	119.3	66.0
102.5°	920.3	695.3	920.3	695.3	135.3	83.6
105°	1198.3	1120.4	1198.3	635.1	158.2	111.1
107.5°	1226.5	1285.8	1226.5	577.5	181.2	139.2
110°	1198.6	1318.5	1198.6	548.1	197.1	155.1



TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	1149.0	1301.7	1149.0	530.5	213.1	171.9
115°	1064.8	1245.1	1064.8	511.5	237.0	198.1
117.5°	984.2	1173.4	984.2	504.5	258.7	224.1
120°	933.8	1117.2	933.8	502.0	273.8	240.0
122.5°	892.4	1061.9	892.4	502.0	287.3	254.3
125°	836.6	986.2	836.6	502.0	307.4	276.7
127.5°	794.4	922.3	794.4	500.8	325.3	295.1
130°	769.8	884.6	769.8	499.9	337.8	306.0
132.5°	749.4	852.7	749.4	499.1	348.7	316.1
135°	717.9	810.2	717.9	497.8	365.0	331.2
137.5°	687.5	768.9	687.5	496.6	380.1	347.5
140°	667.2	742.0	667.2	495.7	390.2	358.4
142.5°	646.9	713.5	646.9	496.6	399.5	368.5
145°	617.6	676.0	617.6	496.8	413.3	384.6
147.5°	592.7	636.2	592.7	497.0	426.0	402.0
150°	578.3	615.2	578.3	497.8	434.5	412.9
152.5°	566.4	595.9	566.4	498.7	443.7	423.0
155°	551.8	572.2	551.8	499.9	454.5	439.1
157.5°	541.3	555.9	541.3	501.2	466.8	454.9
160°	533.7	545.0	533.7	502.0	473.5	463.2
162.5°	528.6	537.5	528.6	502.0	479.4	471.6
165°	522.1	527.2	522.1	502.0	487.2	482.1
167.5°	516.1	518.8	516.1	503.1	494.4	491.8
170°	513.6	514.6	513.6	503.1	497.8	496.8
172.5°	511.0	511.3	511.0	503.9	501.2	500.1
175°	508.3	507.3	508.3	505.2	504.1	504.1
177.5°	507.0	505.4	507.0	505.4	506.2	506.2
180°	506.2	506.2	506.2	506.2	506.2	506.2



TEST NUMBER: P853772

CATALOG NUMBER: SQ2-FA-075U-100D-940-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.61	14.41	14.54	15.33	16.53	12.46	13.26	13.39	14.19	15.38
	3H	14.31	15.02	15.25	15.96	17.18	18.61	19.33	19.55	20.27	21.49
	4H	14.71	15.39	15.67	16.33	17.56	19.89	20.56	20.84	21.51	22.73
	6H	15.07	15.69	16.03	16.64	17.88	20.49	21.11	21.46	22.06	23.30
	8H	15.18	15.77	16.15	16.74	17.98	20.62	21.21	21.59	22.17	23.41
	12H	15.26	15.82	16.23	16.77	18.03	20.66	21.22	21.63	22.18	23.44
4H	2H	14.00	14.67	14.96	15.62	16.84	12.99	13.67	13.95	14.61	15.84
	3H	14.99	15.56	15.96	16.53	17.77	19.32	19.88	20.28	20.85	22.09
	4H	15.55	16.07	16.53	17.04	18.30	20.77	21.28	21.74	22.25	23.51
	6H	16.03	16.47	17.02	17.46	18.73	21.50	21.94	22.49	22.93	24.20
	8H	16.20	16.61	17.19	17.60	18.87	21.67	22.08	22.66	23.06	24.34
	12H	16.31	16.68	17.32	17.69	18.97	21.73	22.10	22.73	23.10	24.38
8H	4H	16.65	17.07	17.64	18.05	19.33	20.89	21.30	21.88	22.28	23.56
	6H	17.26	17.60	18.27	18.63	19.90	21.77	22.10	22.78	23.13	24.41
	8H	17.50	17.79	18.52	18.81	20.10	22.02	22.31	23.04	23.33	24.62
	12H	17.67	17.93	18.69	18.93	20.28	22.14	22.40	23.16	23.40	24.74
12H	4H	16.80	17.17	17.80	18.17	19.45	20.85	21.22	21.85	22.22	23.50
	6H	17.54	17.83	18.56	18.85	20.14	21.78	22.07	22.80	23.09	24.38
	8H	17.83	18.10	18.86	19.10	20.44	22.06	22.32	23.08	23.32	24.66