

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P853850

Luminaire Tested: SQ2-FB-075U-050D-940-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P853850
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FB-075U-050D-940-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5337.4 lumens
Efficiency: N/A
Efficacy: 129.9 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.56
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 41.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P853850
CATALOG NUMBER: SQ2-FB-075U-050D-940-UNV-STD-W-4

Luminous Intensity Polar Plot

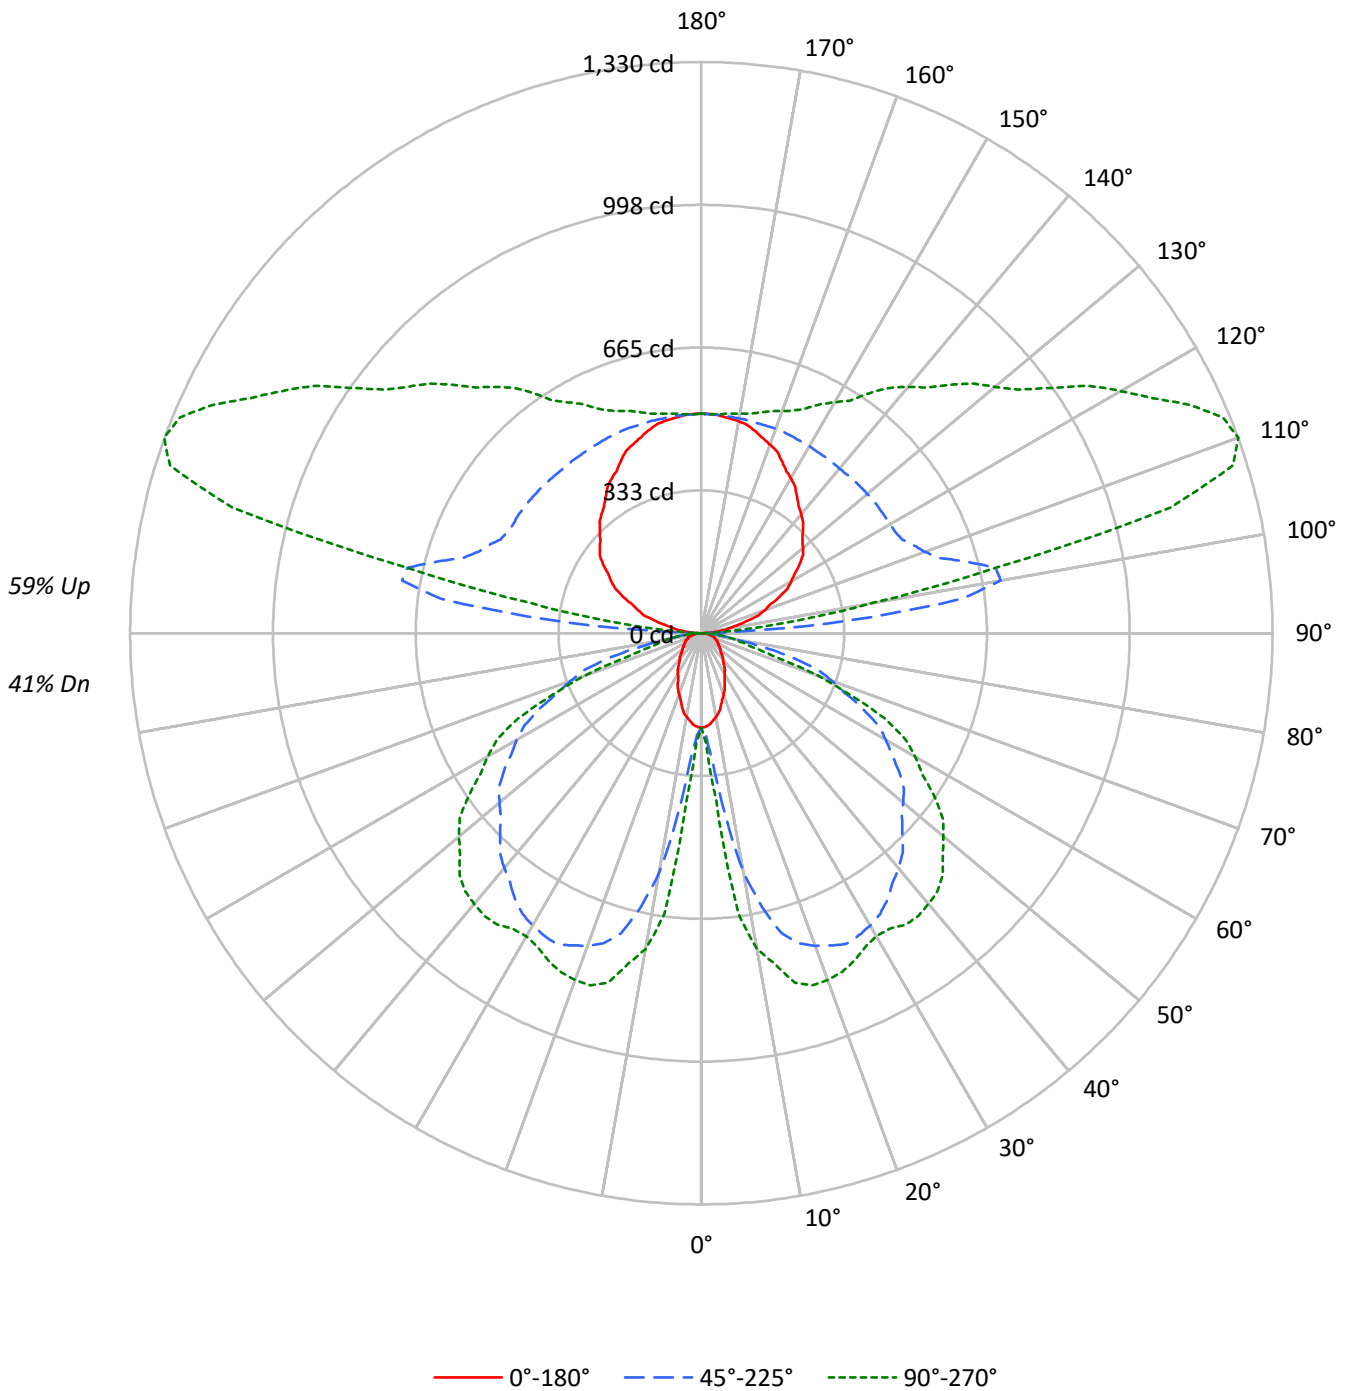



TEST NUMBER: P853850

CATALOG NUMBER: SQ2-FB-075U-050D-940-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41	41	41	41
1	96	91	87	84	87	83	80	77	68	66	64	55	53	52	42	41	40	34	34	34	34
2	87	79	73	68	79	72	67	63	59	56	52	47	45	43	36	35	33	28	28	28	28
3	79	69	62	56	71	63	57	52	52	47	43	42	38	35	32	30	28	23	23	23	23
4	72	61	53	47	65	56	49	43	46	41	37	37	33	30	28	26	23	20	20	20	20
5	66	54	46	40	59	49	42	37	41	35	31	33	29	26	25	22	20	17	17	17	17
6	60	48	40	34	55	44	37	32	36	31	27	29	25	22	23	20	17	14	14	14	14
7	56	43	35	30	50	40	33	27	33	27	23	26	22	19	20	17	15	12	12	12	12
8	51	39	31	26	47	36	29	24	30	24	20	24	20	17	19	16	13	11	11	11	11
9	48	35	28	23	43	33	26	21	27	22	18	22	18	15	17	14	12	10	10	10	10
10	44	32	25	20	40	30	23	19	25	20	16	20	16	13	16	13	11	9	9	9	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3552	3552	3552
5°	3464	4801	6292
10°	3243	9296	12244
15°	2935	12094	14091
20°	2600	13304	14758
25°	2298	14227	15000
30°	2032	14652	15185
35°	1813	14907	16324
40°	1650	15049	17344
45°	1521	15120	18162
50°	1434	15410	18492
55°	1399	15812	18641
60°	1434	16020	18548
65°	1494	15801	18025
70°	1548	15281	13633
75°	1716	13724	7523
80°	1767	7085	6983
85°	1760	4891	2946

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 52.5°
 Luminance: 18807 cd/sqm



TEST NUMBER: P853850

CATALOG NUMBER: SQ2-FB-075U-050D-940-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.9	0.7
10°-20°	168.3	3.2
20°-30°	296.0	5.5
30°-40°	383.2	7.2
40°-50°	422.6	7.9
50°-60°	394.6	7.4
60°-70°	305.0	5.7
70°-80°	140.7	2.6
80°-90°	27.4	0.5
90°-100°	193.2	3.6
100°-110°	640.4	12.0
110°-120°	635.6	11.9
120°-130°	517.7	9.7
130°-140°	420.8	7.9
140°-150°	326.8	6.1
150°-160°	235.4	4.4
160°-170°	144.2	2.7
170°-180°	48.7	0.9
0°-30°	501.2	9.4
0°-40°	884.3	16.6
0°-60°	1701.6	31.9
0°-90°	2174.6	40.7
90°-120°	1469.2	27.5
90°-150°	2734.5	51.2
90°-180°	3163.0	59.3
0°-180°	5337.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	220	220	220	220	220	
5°	214	245	296	361	388	20
15°	176	346	724	810	843	49
25°	129	465	799	834	842	59
35°	92	449	756	783	828	58
45°	67	344	662	760	795	52
55°	50	205	562	646	662	45
65°	39	116	414	464	472	38
75°	28	71	220	118	121	28
85°	10	21	26	18	16	10
90°	0	1	3	4	4	2
95°	28	81	350	125	84	31
105°	112	160	641	1209	1131	118
115°	200	239	516	1074	1256	198
125°	279	310	507	844	995	248
135°	334	368	502	724	818	259
145°	388	417	501	623	682	243
155°	443	459	504	557	578	204
165°	486	492	507	527	532	137
175°	509	509	510	513	512	48
180°	511	511	511	511	511	



TEST NUMBER: P853850

CATALOG NUMBER: SQ2-FB-075U-050D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	220.0	220.0	220.0	220.0	220.0
2.5°	218.3	227.4	237.8	249.7	254.7
5°	213.7	244.7	296.2	361.3	388.2
7.5°	205.4	268.5	430.7	605.0	658.8
10°	197.8	285.7	567.0	717.8	746.8
12.5°	189.3	308.7	652.4	758.5	788.3
15°	175.6	346.2	723.5	809.9	843.0
17.5°	161.4	388.5	756.5	841.8	859.8
20°	151.3	418.1	774.3	847.5	858.9
22.5°	142.0	440.2	787.0	842.5	854.7
25°	129.0	465.2	798.6	833.7	842.0
27.5°	116.6	471.7	793.5	816.6	824.6
30°	109.0	469.9	785.9	803.1	814.5
32.5°	102.2	464.8	774.9	791.6	816.2
35°	92.0	448.8	756.3	782.7	828.2
37.5°	83.4	423.2	731.8	785.9	829.7
40°	78.3	404.1	714.0	785.7	822.9
42.5°	73.2	381.6	693.7	777.3	814.5
45°	66.6	343.8	662.2	760.3	795.4
47.5°	60.5	301.3	633.0	736.8	762.4
50°	57.1	272.2	613.5	715.5	736.2
52.5°	53.7	244.0	594.0	690.1	709.1
55°	49.7	204.9	561.7	645.6	662.2
57.5°	46.1	171.3	524.9	596.5	609.9
60°	44.4	153.0	496.1	560.9	574.4
62.5°	41.9	136.4	463.9	523.7	536.3
65°	39.1	115.7	413.6	463.5	471.8
67.5°	35.3	100.3	360.1	390.6	375.1
70°	32.8	92.8	323.7	333.2	288.8
72.5°	31.1	84.5	283.9	258.7	174.5
75°	27.5	70.9	220.0	118.5	120.6
77.5°	22.4	54.9	144.7	91.0	92.9
80°	19.0	44.9	76.2	74.1	75.1
82.5°	15.7	34.9	52.5	54.5	53.1
85°	9.5	20.9	26.4	17.9	15.9
87.5°	3.4	7.7	4.9	5.1	5.1
90°	0.0	1.0	3.2	4.2	4.2
92.5°	8.5	32.7	96.2	31.2	26.2
95°	27.5	81.3	350.1	124.9	83.6
97.5°	50.6	106.8	611.1	356.4	225.3
100°	66.6	120.4	707.6	607.7	403.0
102.5°	84.4	136.5	701.6	928.7	701.6
105°	112.1	159.7	640.9	1209.2	1130.6
107.5°	140.5	182.9	582.8	1237.7	1297.5
110°	156.5	198.9	553.1	1209.5	1330.5



TEST NUMBER: P853850

CATALOG NUMBER: SQ2-FB-075U-050D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	173.5	215.0	535.4	1159.5	1313.6
115°	199.9	239.2	516.1	1074.5	1256.5
117.5°	226.1	261.1	509.1	993.2	1184.1
120°	242.2	276.3	506.6	942.3	1127.4
122.5°	256.6	289.9	506.6	900.6	1071.6
125°	279.2	310.2	506.6	844.3	995.2
127.5°	297.8	328.2	505.3	801.7	930.7
130°	308.8	340.9	504.5	776.8	892.6
132.5°	319.0	351.9	503.6	756.3	860.5
135°	334.2	368.3	502.4	724.5	817.6
137.5°	350.7	383.6	501.1	693.8	775.9
140°	361.7	393.8	500.3	673.3	748.8
142.5°	371.9	403.1	501.1	652.8	720.0
145°	388.2	417.1	501.3	623.2	682.2
147.5°	405.7	429.9	501.5	598.1	642.0
150°	416.7	438.4	502.4	583.6	620.8
152.5°	426.9	447.8	503.2	571.6	601.4
155°	443.1	458.7	504.5	556.8	577.5
157.5°	459.0	471.0	505.8	546.3	561.0
160°	467.5	477.8	506.6	538.6	550.0
162.5°	475.9	483.8	506.6	533.5	542.4
165°	486.5	491.7	506.6	526.8	532.0
167.5°	496.2	498.9	507.7	520.8	523.5
170°	501.3	502.4	507.7	518.3	519.3
172.5°	504.7	505.7	508.5	515.7	515.9
175°	508.7	508.7	509.8	512.9	511.9
177.5°	510.8	510.8	510.0	511.6	510.0
180°	510.8	510.8	510.8	510.8	510.8



TEST NUMBER: P853850

CATALOG NUMBER: SQ2-FB-075U-050D-940-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.55	11.36	11.58	12.40	13.79	19.29	20.10	20.32	21.13	22.53
	3H	11.28	12.00	12.32	13.05	14.46	20.91	21.63	21.95	22.68	24.09
	4H	11.58	12.26	12.63	13.31	14.73	21.09	21.77	22.14	22.82	24.24
	6H	11.79	12.42	12.85	13.47	14.91	21.17	21.80	22.23	22.85	24.29
	8H	11.85	12.45	12.91	13.52	14.95	21.17	21.77	22.24	22.84	24.27
	12H	11.87	12.44	12.94	13.51	14.96	21.14	21.71	22.21	22.77	24.23
4H	2H	14.95	15.63	16.00	16.68	18.10	19.73	20.41	20.78	21.46	22.88
	3H	15.87	16.44	16.94	17.52	18.96	21.55	22.12	22.61	23.19	24.63
	4H	16.15	16.68	17.23	17.74	19.20	21.78	22.30	22.85	23.37	24.83
	6H	16.28	16.73	17.36	17.82	19.27	21.92	22.37	23.01	23.46	24.92
	8H	16.30	16.72	17.38	17.80	19.27	21.95	22.37	23.03	23.45	24.92
	12H	16.29	16.67	17.39	17.77	19.24	21.92	22.30	23.02	23.39	24.87
8H	4H	17.32	17.74	18.41	18.83	20.29	21.90	22.31	22.98	23.40	24.86
	6H	17.56	17.90	18.66	19.03	20.49	22.10	22.44	23.20	23.57	25.03
	8H	17.63	17.93	18.74	19.04	20.52	22.16	22.46	23.27	23.57	25.05
	12H	17.65	17.92	18.77	19.02	20.54	22.15	22.41	23.26	23.52	25.04
12H	4H	17.34	17.72	18.44	18.81	20.29	21.84	22.22	22.94	23.32	24.79
	6H	17.65	17.95	18.76	19.06	20.55	22.08	22.38	23.19	23.49	24.97
	8H	17.75	18.02	18.87	19.12	20.65	22.14	22.41	23.26	23.51	25.04