

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P853886

Luminaire Tested: SQ2-FB-125U-050D-940-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P853886  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-12)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-FB-125U-050D-940-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 500 LUMENS PER FOOT  
UPLIGHT 1250 LUMENS PER FOOT  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7480.2 lumens  
Efficiency: N/A  
Efficacy: 121.2 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.56  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 61.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P853886

CATALOG NUMBER: SQ2-FB-125U-050D-940-UNV-STD-W-4

### Luminous Intensity Polar Plot

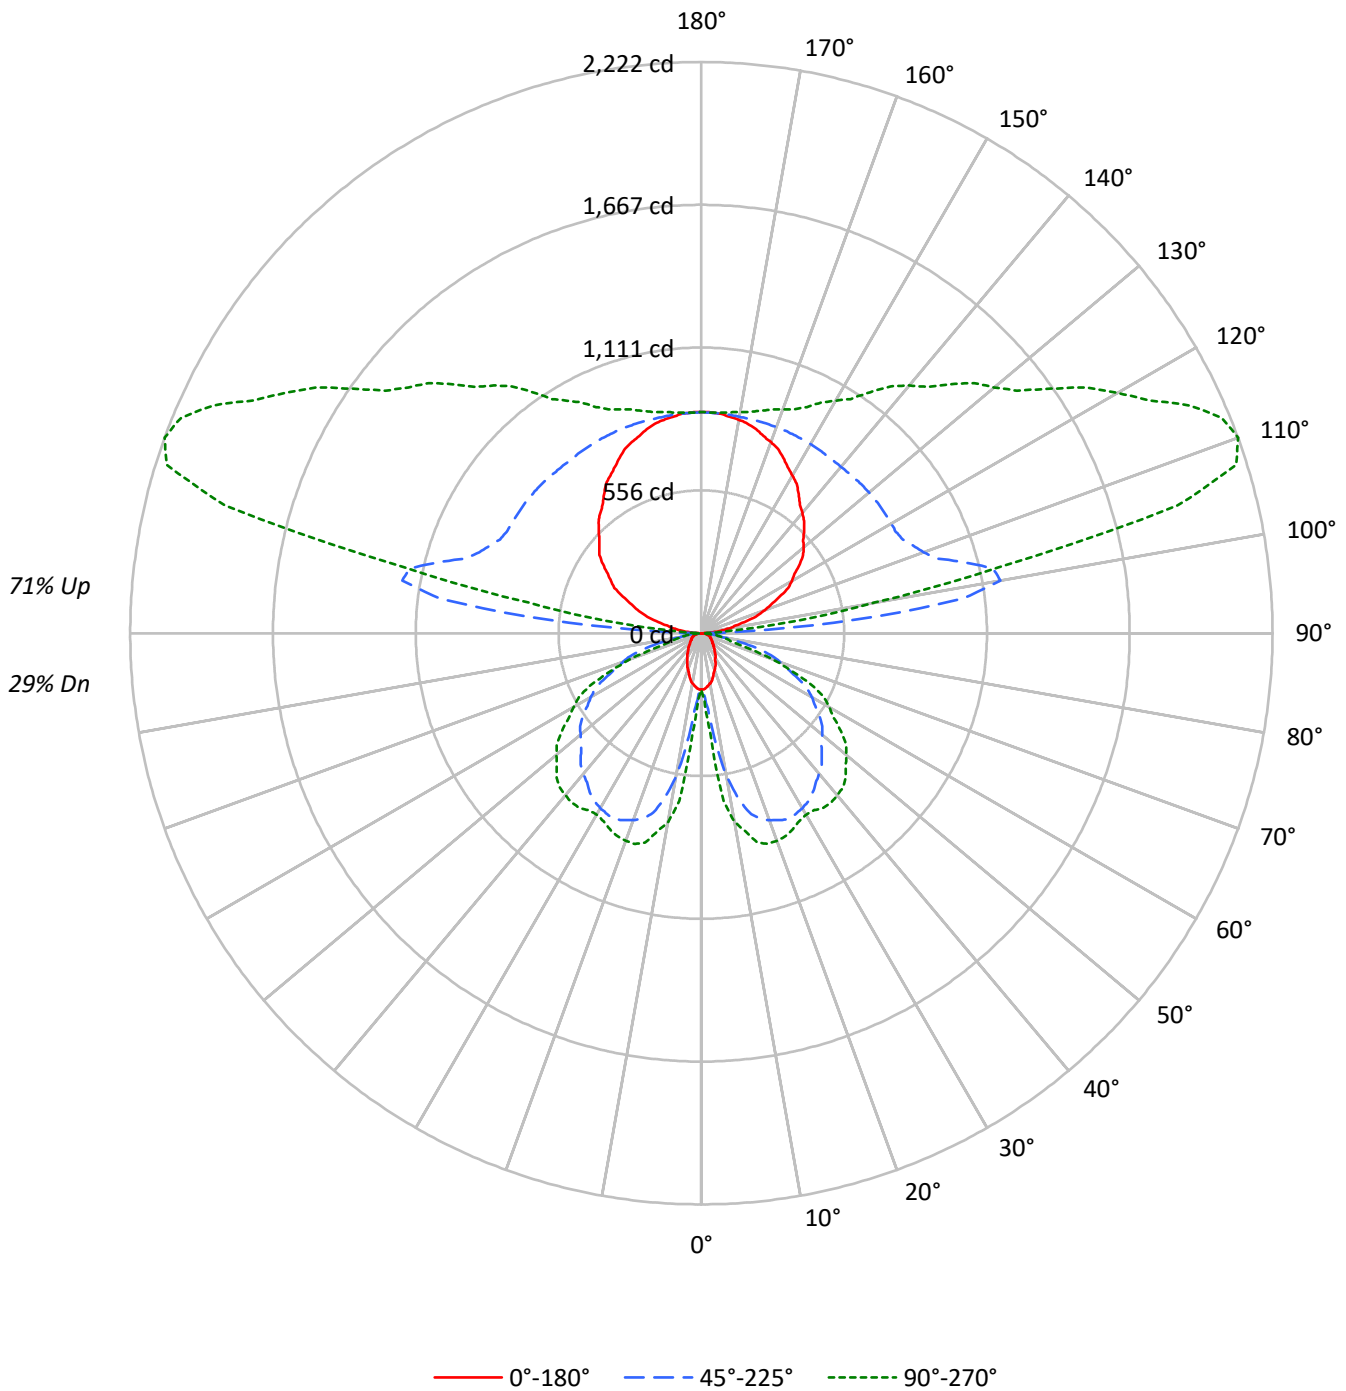



TEST NUMBER: P853886

CATALOG NUMBER: SQ2-FB-125U-050D-940-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37	29
1	93	89	85	82	83	80	76	74	63	60	58	47	46	44	32	32	31	24
2	84	77	71	66	75	69	64	60	55	51	48	41	39	37	28	27	26	20
3	77	68	60	55	68	61	55	50	48	43	40	36	33	31	25	23	22	17
4	70	59	52	46	62	53	47	42	42	37	34	32	28	26	22	20	18	14
5	64	53	45	39	57	47	41	35	37	32	29	28	25	22	19	17	16	12
6	59	47	39	33	52	42	35	30	33	28	25	25	22	19	17	15	13	10
7	54	42	34	29	48	38	31	26	30	25	21	23	19	17	16	14	12	9
8	50	38	30	25	45	34	28	23	27	22	19	21	17	15	14	12	10	8
9	46	34	27	22	41	31	25	20	25	20	17	19	15	13	13	11	9	7
10	43	31	24	20	39	28	22	18	23	18	15	17	14	11	12	10	8	6

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3552	3552	3552
5°	3464	4801	6292
10°	3243	9296	12244
15°	2935	12094	14091
20°	2600	13304	14758
25°	2298	14227	15000
30°	2032	14652	15185
35°	1813	14907	16324
40°	1650	15049	17344
45°	1521	15120	18162
50°	1434	15410	18492
55°	1399	15812	18641
60°	1434	16020	18548
65°	1494	15801	18025
70°	1548	15281	13633
75°	1716	13724	7523
80°	1767	7085	6983
85°	1760	4891	2946

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 52.5°  
 Luminance: 18807 cd/sqm



TEST NUMBER: P853886

CATALOG NUMBER: SQ2-FB-125U-050D-940-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	36.9	0.5
10°-20°	168.3	2.2
20°-30°	296.0	4.0
30°-40°	383.2	5.1
40°-50°	422.6	5.6
50°-60°	394.6	5.3
60°-70°	305.0	4.1
70°-80°	140.7	1.9
80°-90°	27.8	0.4
90°-100°	328.9	4.4
100°-110°	1070.9	14.3
110°-120°	1059.3	14.2
120°-130°	865.7	11.6
130°-140°	707.5	9.5
140°-150°	551.1	7.4
150°-160°	397.2	5.3
160°-170°	242.8	3.2
170°-180°	81.9	1.1
0°-30°	501.2	6.7
0°-40°	884.3	11.8
0°-60°	1701.6	22.7
0°-90°	2175.0	29.1
90°-120°	2459.0	32.9
90°-150°	4583.3	61.3
90°-180°	5305.0	70.9
0°-180°	7480.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	220	220	220	220	220	
5°	214	245	296	361	388	20
15°	176	346	724	810	843	49
25°	129	465	799	834	842	59
35°	92	449	756	783	828	58
45°	67	344	662	760	795	52
55°	50	205	562	646	662	45
65°	39	116	414	464	472	38
75°	28	71	220	118	121	28
85°	10	21	26	18	16	10
90°	0	3	7	6	6	3
95°	44	135	603	215	132	52
105°	182	263	1061	2026	1919	194
115°	336	402	864	1781	2095	333
125°	468	521	852	1406	1657	416
135°	565	624	848	1214	1369	436
145°	660	709	846	1045	1144	413
155°	753	778	851	936	971	347
165°	822	829	854	886	896	231
175°	857	857	857	863	861	81
180°	860	860	860	860	860	

TEST NUMBER: P853886

CATALOG NUMBER: SQ2-FB-125U-050D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	220.0	220.0	220.0	220.0	220.0
2.5°	218.3	227.4	237.8	249.7	254.7
5°	213.7	244.7	296.2	361.3	388.2
7.5°	205.4	268.5	430.7	605.0	658.8
10°	197.8	285.7	567.0	717.8	746.8
12.5°	189.3	308.7	652.4	758.5	788.3
15°	175.6	346.2	723.5	809.9	843.0
17.5°	161.4	388.5	756.5	841.8	859.8
20°	151.3	418.1	774.3	847.5	858.9
22.5°	142.0	440.2	787.0	842.5	854.7
25°	129.0	465.2	798.6	833.7	842.0
27.5°	116.6	471.7	793.5	816.6	824.6
30°	109.0	469.9	785.9	803.1	814.5
32.5°	102.2	464.8	774.9	791.6	816.2
35°	92.0	448.8	756.3	782.7	828.2
37.5°	83.4	423.2	731.8	785.9	829.7
40°	78.3	404.1	714.0	785.7	822.9
42.5°	73.2	381.6	693.7	777.3	814.5
45°	66.6	343.8	662.2	760.3	795.4
47.5°	60.5	301.3	633.0	736.8	762.4
50°	57.1	272.2	613.5	715.5	736.2
52.5°	53.7	244.0	594.0	690.1	709.1
55°	49.7	204.9	561.7	645.6	662.2
57.5°	46.1	171.3	524.9	596.5	609.9
60°	44.4	153.0	496.1	560.9	574.4
62.5°	41.9	136.4	463.9	523.7	536.3
65°	39.1	115.7	413.6	463.5	471.8
67.5°	35.3	100.3	360.1	390.6	375.1
70°	32.8	92.8	323.7	333.2	288.8
72.5°	31.1	84.5	283.9	258.7	174.5
75°	27.5	70.9	220.0	118.5	120.6
77.5°	22.4	54.9	144.7	91.0	92.9
80°	19.0	44.9	76.2	74.1	75.1
82.5°	15.7	34.9	52.5	54.5	53.1
85°	9.5	20.9	26.4	17.9	15.9
87.5°	3.4	8.1	5.7	5.5	5.5
90°	0.0	3.1	7.4	6.3	6.3
92.5°	15.2	54.7	174.9	57.7	44.4
95°	44.4	135.4	602.9	214.9	132.2
97.5°	83.6	176.2	1023.2	623.1	380.3
100°	108.9	199.9	1181.4	1053.5	683.2
102.5°	137.7	225.4	1161.9	1558.5	1185.0
105°	181.9	262.6	1060.8	2026.1	1918.6
107.5°	229.7	305.6	964.8	2066.7	2180.7
110°	264.4	333.7	919.1	2016.3	2222.1



TEST NUMBER: P853886

CATALOG NUMBER: SQ2-FB-125U-050D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	293.2	361.6	890.3	1925.4	2190.8
115°	336.3	401.5	864.1	1780.8	2095.2
117.5°	380.8	439.5	853.9	1648.4	1961.3
120°	406.1	464.0	851.4	1566.9	1869.9
122.5°	430.7	487.8	852.3	1496.2	1778.5
125°	467.5	521.3	852.5	1406.0	1657.3
127.5°	499.0	554.0	852.3	1338.5	1548.0
130°	519.3	575.1	851.4	1299.9	1487.1
132.5°	537.1	595.4	850.6	1264.1	1439.7
135°	564.8	623.7	848.2	1213.5	1368.6
137.5°	591.9	651.2	845.9	1162.1	1299.8
140°	611.3	668.2	845.1	1127.2	1257.5
142.5°	629.9	684.3	845.1	1093.9	1210.2
145°	660.0	708.6	846.1	1045.1	1144.4
147.5°	689.2	731.4	847.6	1003.5	1080.3
150°	708.6	745.9	849.3	978.7	1043.9
152.5°	728.1	758.7	850.1	959.8	1011.7
155°	753.0	777.9	851.4	935.8	970.9
157.5°	776.7	794.5	852.7	918.0	942.6
160°	791.1	805.6	853.5	906.8	926.5
162.5°	803.8	815.0	853.5	897.4	912.1
165°	821.8	829.0	853.5	885.5	895.8
167.5°	834.5	839.0	853.7	876.5	881.9
170°	842.9	845.0	854.6	870.5	872.6
172.5°	848.9	850.1	856.3	867.0	866.6
175°	856.7	856.7	856.7	863.0	860.9
177.5°	859.9	859.0	858.2	862.3	859.0
180°	859.9	859.9	859.9	859.9	859.9



TEST NUMBER: P853886

CATALOG NUMBER: SQ2-FB-125U-050D-940-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.14	9.86	10.26	10.97	12.51	17.88	18.59	19.00	19.71	21.25
	3H	9.86	10.50	10.99	11.62	13.18	19.49	20.13	20.61	21.25	22.81
	4H	10.16	10.76	11.29	11.88	13.45	19.66	20.27	20.80	21.39	22.95
	6H	10.36	10.92	11.50	12.04	13.62	19.74	20.30	20.88	21.42	23.00
	8H	10.42	10.95	11.56	12.09	13.65	19.74	20.27	20.89	21.41	22.98
	12H	10.44	10.94	11.59	12.08	13.67	19.71	20.21	20.86	21.34	22.93
4H	2H	13.52	14.13	14.66	15.25	16.81	18.30	18.91	19.44	20.03	21.59
	3H	14.44	14.95	15.59	16.10	17.67	20.12	20.62	21.26	21.77	23.34
	4H	14.72	15.18	15.87	16.32	17.91	20.35	20.81	21.50	21.95	23.54
	6H	14.84	15.24	16.00	16.40	17.98	20.48	20.88	21.64	22.04	23.62
	8H	14.86	15.23	16.01	16.38	17.98	20.50	20.88	21.66	22.03	23.63
	12H	14.84	15.18	16.01	16.34	17.95	20.47	20.81	21.64	21.97	23.57
8H	4H	15.88	16.25	17.04	17.40	19.00	20.45	20.82	21.61	21.97	23.57
	6H	16.11	16.42	17.29	17.61	19.21	20.65	20.96	21.83	22.15	23.75
	8H	16.18	16.45	17.36	17.62	19.24	20.71	20.98	21.89	22.15	23.77
	12H	16.20	16.43	17.38	17.60	19.25	20.69	20.93	21.88	22.10	23.75
12H	4H	15.89	16.23	17.06	17.39	19.00	20.40	20.73	21.57	21.89	23.50
	6H	16.20	16.47	17.38	17.64	19.26	20.63	20.90	21.81	22.07	23.69
	8H	16.30	16.53	17.49	17.70	19.35	20.69	20.92	21.88	22.09	23.74