

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854024

Luminaire Tested: SQ2-PH1-075U-100D-940-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854024
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PH1-075U-100D-940-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7904.1 lumens
Efficiency: N/A
Efficacy: 129.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 60.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854024
CATALOG NUMBER: SQ2-PH1-075U-100D-940-UNV-STD-W-4

Luminous Intensity Polar Plot

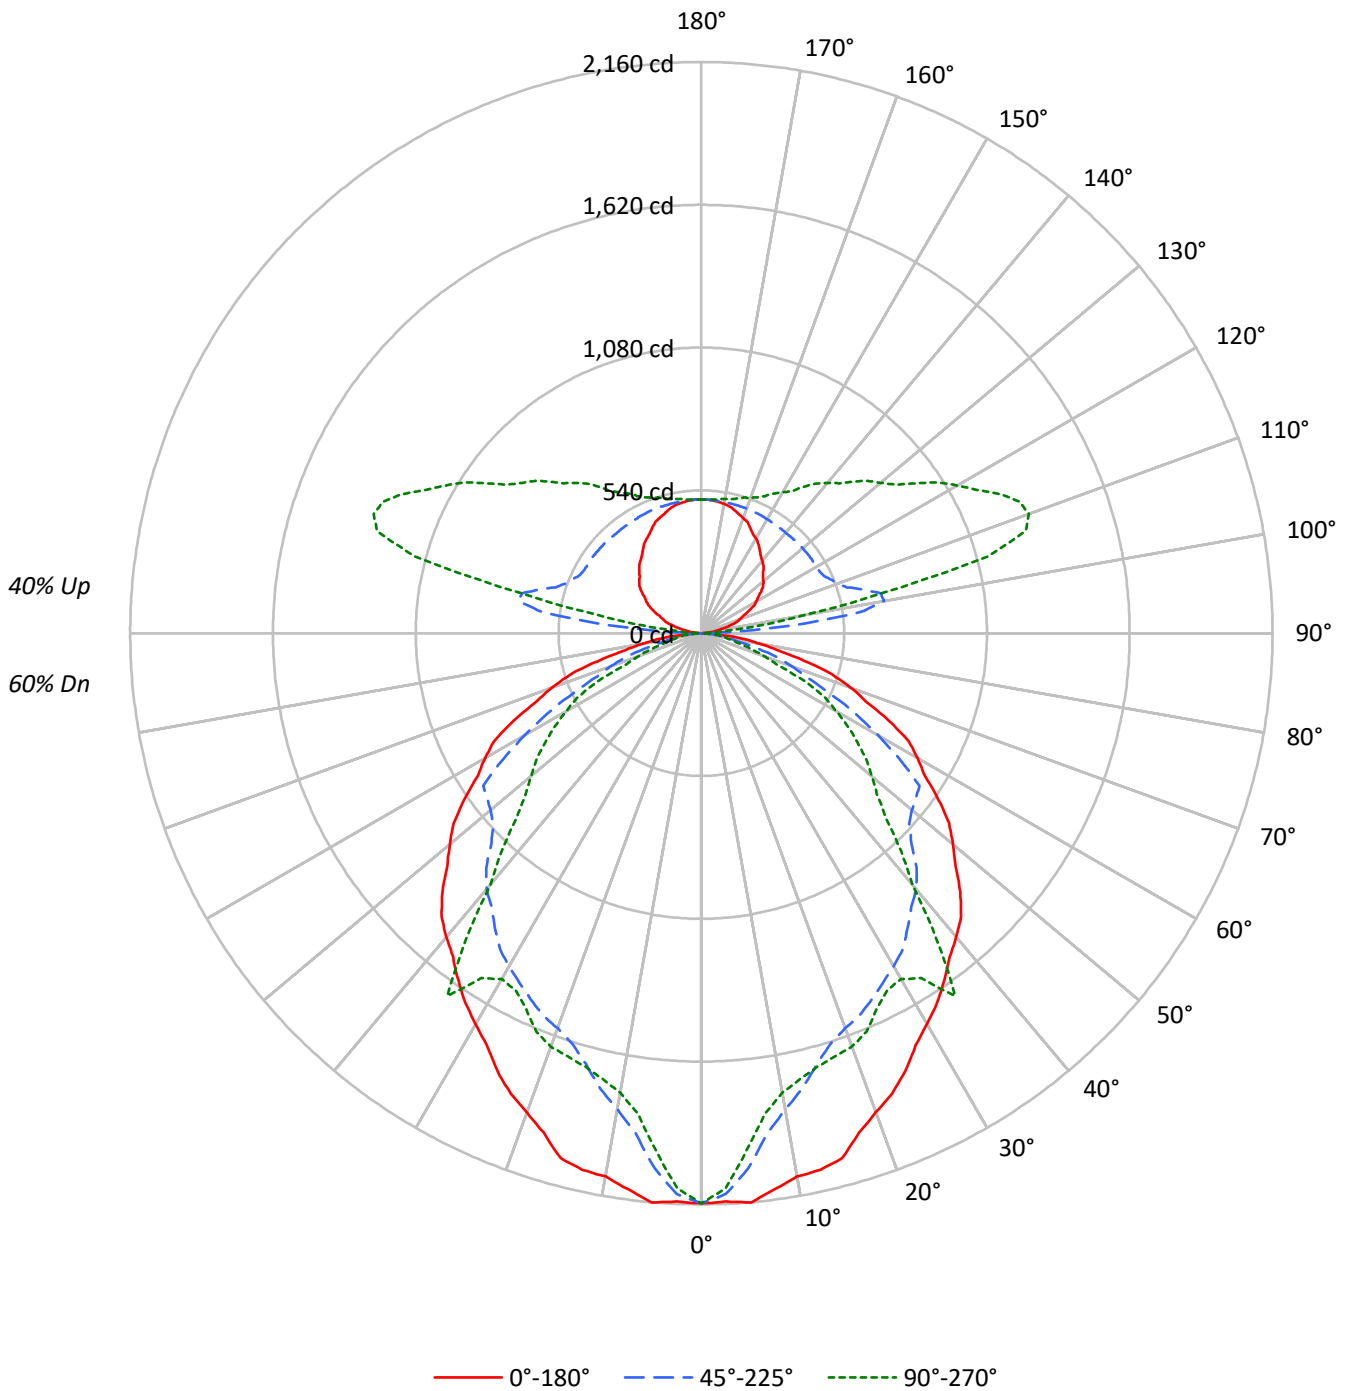



TEST NUMBER: P854024

CATALOG NUMBER: SQ2-PH1-075U-100D-940-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	66	66	66	66	66	66	60	
1	100	96	92	89	94	90	87	84	79	76	74	68	66	65	58	57	56	56	56	56	51	
2	92	84	78	73	85	79	74	69	69	65	61	60	57	54	52	49	47	47	47	47	43	
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	46	43	41	41	41	41	37	
4	77	66	58	52	71	62	55	49	54	49	44	47	43	40	41	38	35	35	35	35	32	
5	70	59	50	44	66	55	48	42	49	43	38	43	38	34	37	33	31	31	31	31	28	
6	65	53	44	39	60	50	42	37	44	38	34	39	34	30	34	30	27	27	27	27	24	
7	60	48	40	34	56	45	38	32	40	34	30	35	30	27	31	27	24	24	24	24	22	
8	56	43	35	30	52	41	34	29	36	31	26	32	27	24	28	24	22	22	22	22	19	
9	52	40	32	27	49	37	31	26	33	28	24	30	25	22	26	22	19	19	19	19	17	
10	49	36	29	24	46	34	28	23	31	25	21	27	23	20	24	20	18	18	18	18	16	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	34814	34814	34814
5°	35013	32919	31822
10°	34208	29970	28927
15°	34362	28189	28361
20°	33136	27319	28589
25°	32528	27193	27923
30°	31823	27119	28152
35°	31582	26810	32997
40°	31609	26637	26161
45°	31620	25624	22532
50°	31177	26128	21130
55°	30781	28355	20270
60°	30474	24845	19013
65°	29941	20145	16539
70°	28282	17141	11816
75°	25215	12926	8958
80°	20604	8396	8396
85°	12931	7595	5706

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 31620 cd/sqm



TEST NUMBER: P854024

CATALOG NUMBER: SQ2-PH1-075U-100D-940-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.7	2.4
10°-20°	499.1	6.3
20°-30°	731.8	9.3
30°-40°	886.2	11.2
40°-50°	871.5	11.0
50°-60°	758.6	9.6
60°-70°	527.4	6.7
70°-80°	250.1	3.2
80°-90°	55.6	0.7
90°-100°	191.4	2.4
100°-110°	634.6	8.0
110°-120°	629.9	8.0
120°-130°	513.0	6.5
130°-140°	417.0	5.3
140°-150°	323.8	4.1
150°-160°	233.3	3.0
160°-170°	142.9	1.8
170°-180°	48.3	0.6
0°-30°	1420.6	18.0
0°-40°	2306.7	29.2
0°-60°	3936.8	49.8
0°-90°	4769.9	60.3
90°-120°	1456.0	18.4
90°-150°	2709.8	34.3
90°-180°	3134.0	39.7
0°-180°	7904.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2156	2156	2156	2156	2156	
5°	2160	2158	2031	1967	1963	203
15°	2056	1831	1686	1675	1697	573
25°	1826	1553	1526	1573	1567	840
35°	1602	1295	1360	1478	1674	1004
45°	1385	1026	1122	1161	987	1064
55°	1094	799	1007	726	720	977
65°	784	549	527	433	433	770
75°	404	280	207	148	144	428
85°	70	46	41	33	31	93
90°	0	1	3	4	4	3
95°	27	80	347	124	83	31
105°	111	158	635	1198	1120	117
115°	198	237	512	1065	1245	196
125°	277	307	502	837	986	246
135°	331	365	498	718	810	256
145°	385	413	497	618	676	241
155°	439	454	500	552	572	202
165°	482	487	502	522	527	136
175°	504	504	505	508	507	48
180°	506	506	506	506	506	



TEST NUMBER: P854024

CATALOG NUMBER: SQ2-PH1-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2156.2	2156.2	2156.2	2156.2	2156.2
2.5°	2151.3	2173.8	2123.4	2103.6	2100.4
5°	2160.3	2158.3	2031.1	1967.4	1963.4
7.5°	2121.0	2058.8	1906.8	1836.5	1833.3
10°	2086.5	1992.2	1828.0	1764.4	1764.4
12.5°	2078.3	1929.4	1764.0	1717.0	1726.6
15°	2055.7	1831.0	1686.4	1674.6	1696.7
17.5°	1981.0	1739.1	1626.1	1652.9	1678.6
20°	1928.5	1689.8	1590.0	1639.8	1663.9
22.5°	1884.2	1642.3	1563.7	1618.2	1631.0
25°	1825.9	1553.1	1526.4	1573.4	1567.4
27.5°	1756.2	1471.3	1489.1	1517.9	1521.5
30°	1706.9	1422.1	1454.6	1483.9	1510.0
32.5°	1659.3	1364.9	1416.8	1486.3	1546.1
35°	1602.3	1295.4	1360.2	1477.5	1674.1
37.5°	1542.4	1213.4	1303.2	1401.8	1464.4
40°	1499.7	1154.7	1263.8	1385.7	1241.2
42.5°	1453.8	1108.7	1204.7	1362.1	1118.1
45°	1384.8	1025.8	1122.2	1161.3	986.8
47.5°	1303.6	961.4	1066.4	968.4	900.2
50°	1241.2	918.3	1040.2	885.3	841.2
52.5°	1180.5	873.6	1022.1	816.7	787.0
55°	1093.5	798.6	1007.3	726.1	720.1
57.5°	1001.2	722.3	890.8	647.3	657.7
60°	943.7	672.9	769.4	600.8	588.8
62.5°	883.0	625.0	656.1	541.8	529.7
65°	783.7	549.0	527.3	432.9	432.9
67.5°	674.6	470.0	427.1	354.2	306.1
70°	599.1	418.5	363.1	282.4	250.3
72.5°	518.6	363.8	297.5	231.4	194.5
75°	404.2	279.8	207.2	147.6	143.6
77.5°	292.1	201.5	139.5	109.6	110.0
80°	221.6	153.4	90.3	88.3	90.3
82.5°	155.9	105.4	67.3	70.2	70.6
85°	69.8	45.7	41.0	32.8	30.8
87.5°	14.8	13.4	8.8	9.0	9.0
90°	0.0	1.0	3.1	4.2	4.2
92.5°	8.4	32.4	95.4	30.9	26.0
95°	27.2	80.5	346.9	123.8	82.8
97.5°	50.1	105.8	605.6	353.2	223.2
100°	66.0	119.3	701.2	602.2	399.3
102.5°	83.6	135.3	695.3	920.3	695.3
105°	111.1	158.2	635.1	1198.3	1120.4
107.5°	139.2	181.2	577.5	1226.5	1285.8
110°	155.1	197.1	548.1	1198.6	1318.5



TEST NUMBER: P854024

CATALOG NUMBER: SQ2-PH1-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	171.9	213.1	530.5	1149.0	1301.7
115°	198.1	237.0	511.5	1064.8	1245.1
117.5°	224.1	258.7	504.5	984.2	1173.4
120°	240.0	273.8	502.0	933.8	1117.2
122.5°	254.3	287.3	502.0	892.4	1061.9
125°	276.7	307.4	502.0	836.6	986.2
127.5°	295.1	325.3	500.8	794.4	922.3
130°	306.0	337.8	499.9	769.8	884.6
132.5°	316.1	348.7	499.1	749.4	852.7
135°	331.2	365.0	497.8	717.9	810.2
137.5°	347.5	380.1	496.6	687.5	768.9
140°	358.4	390.2	495.7	667.2	742.0
142.5°	368.5	399.5	496.6	646.9	713.5
145°	384.6	413.3	496.8	617.6	676.0
147.5°	402.0	426.0	497.0	592.7	636.2
150°	412.9	434.5	497.8	578.3	615.2
152.5°	423.0	443.7	498.7	566.4	595.9
155°	439.1	454.5	499.9	551.8	572.2
157.5°	454.9	466.8	501.2	541.3	555.9
160°	463.2	473.5	502.0	533.7	545.0
162.5°	471.6	479.4	502.0	528.6	537.5
165°	482.1	487.2	502.0	522.1	527.2
167.5°	491.8	494.4	503.1	516.1	518.8
170°	496.8	497.8	503.1	513.6	514.6
172.5°	500.1	501.2	503.9	511.0	511.3
175°	504.1	504.1	505.2	508.3	507.3
177.5°	506.2	506.2	505.4	507.0	505.4
180°	506.2	506.2	506.2	506.2	506.2



TEST NUMBER: P854024

CATALOG NUMBER: SQ2-PH1-075U-100D-940-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.57	21.52	21.43	22.41	23.52	19.24	20.19	20.11	21.08	22.19
	3H	22.60	23.45	23.48	24.35	25.49	20.28	21.14	21.16	22.03	23.17
	4H	23.34	24.14	24.23	25.04	26.19	20.50	21.31	21.39	22.21	23.36
	6H	23.83	24.57	24.73	25.48	26.64	20.65	21.39	21.55	22.30	23.46
	8H	23.95	24.66	24.87	25.58	26.75	20.68	21.39	21.60	22.32	23.48
	12H	24.00	24.67	24.92	25.59	26.78	20.69	21.36	21.60	22.28	23.47
4H	2H	20.95	21.76	21.85	22.66	23.81	19.89	20.70	20.79	21.60	22.75
	3H	23.07	23.74	23.98	24.67	25.84	21.08	21.75	21.99	22.68	23.85
	4H	23.89	24.50	24.81	25.43	26.62	21.36	21.97	22.28	22.90	24.09
	6H	24.48	25.01	25.41	25.96	27.15	21.57	22.10	22.51	23.05	24.25
	8H	24.65	25.14	25.59	26.09	27.29	21.63	22.12	22.57	23.07	24.28
	12H	24.72	25.17	25.68	26.13	27.34	21.65	22.09	22.60	23.05	24.26
8H	4H	23.91	24.40	24.85	25.35	26.56	21.58	22.08	22.52	23.02	24.23
	6H	24.57	24.97	25.53	25.96	27.17	21.86	22.27	22.82	23.25	24.46
	8H	24.80	25.15	25.77	26.13	27.36	21.96	22.32	22.94	23.30	24.52
	12H	24.91	25.23	25.89	26.20	27.47	22.01	22.33	22.99	23.30	24.57
12H	4H	23.87	24.31	24.83	25.28	26.49	21.59	22.03	22.54	22.99	24.20
	6H	24.54	24.90	25.52	25.88	27.10	21.89	22.25	22.86	23.23	24.45
	8H	24.78	25.10	25.76	26.07	27.34	22.01	22.33	22.99	23.30	24.57