

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854063

Luminaire Tested: SQ2-PH1-125U-125D-940-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P854063  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-13, G2-2308-131-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-PH1-125U-125D-940-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 1250 LUMENS PER FOOT  
UPLIGHT 1250 LUMENS PER FOOT  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11178.6 lumens  
Efficiency: N/A  
Efficacy: 120.1 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 93.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P854063  
CATALOG NUMBER: SQ2-PH1-125U-125D-940-UNV-STD-W-4

### Luminous Intensity Polar Plot

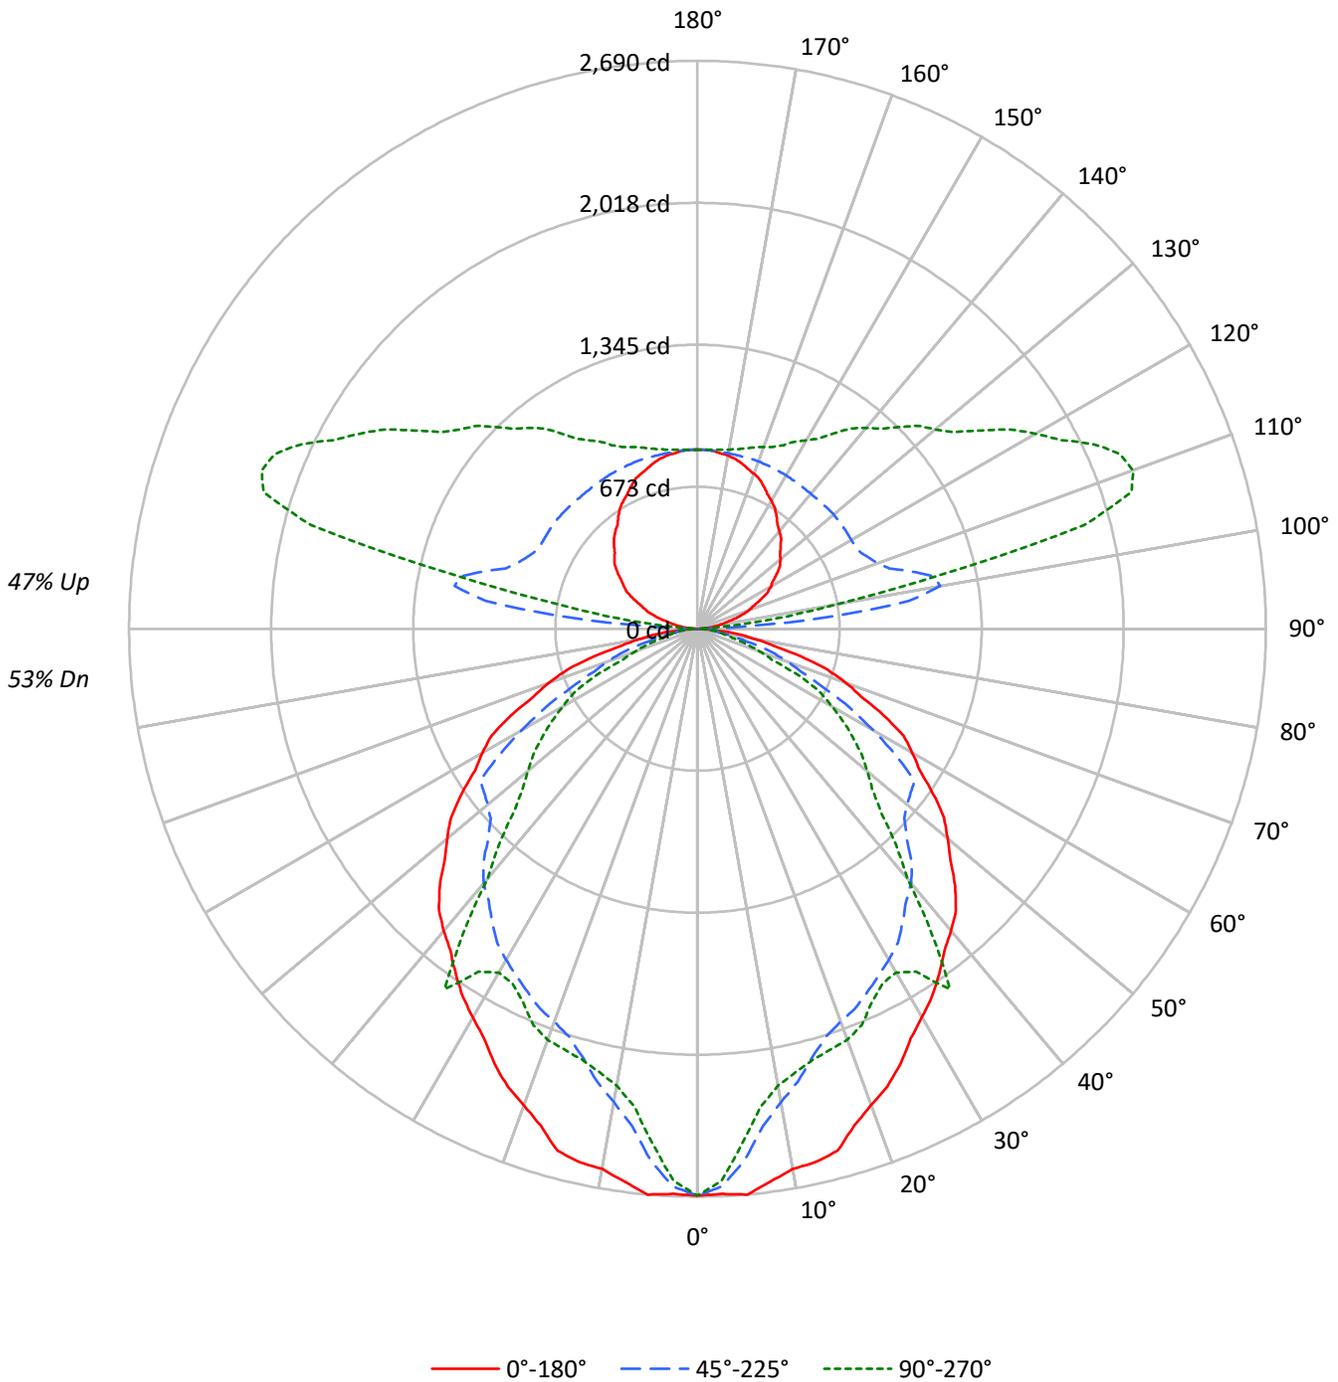



TEST NUMBER: P854063

CATALOG NUMBER: SQ2-PH1-125U-125D-940-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	94	91	87	91	88	84	81	75	73	70	63	62	60	53	51	50	45
2	90	83	77	72	83	77	72	67	66	62	59	56	53	50	46	44	43	38
3	82	73	66	60	76	68	61	56	58	53	49	49	46	43	41	39	36	32
4	75	64	57	51	69	60	53	48	52	46	42	44	40	37	37	34	31	28
5	69	57	49	43	64	54	46	41	46	41	36	40	35	32	33	30	27	24
6	64	52	44	38	59	48	41	36	42	36	32	36	31	28	30	27	24	21
7	59	47	39	33	54	44	36	31	38	32	28	33	28	25	28	24	22	19
8	55	42	35	29	51	40	33	28	35	29	25	30	25	22	25	22	19	17
9	51	39	31	26	47	36	30	25	32	26	22	27	23	20	23	20	17	15
10	48	36	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	43348	43348	43348
5°	43598	40989	39623
10°	42594	37316	36018
15°	42786	35101	35313
20°	41259	34017	35598
25°	40504	33859	34769
30°	39625	33767	35054
35°	39324	33384	41086
40°	39359	33167	32574
45°	39372	31905	28056
50°	38821	32533	26309
55°	38328	35308	25242
60°	37946	30935	23676
65°	37280	25081	20592
70°	35212	21347	14715
75°	31391	16095	11154
80°	25653	10451	10451
85°	16098	9466	7095

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 39372 cd/sqm



TEST NUMBER: P854063

CATALOG NUMBER: SQ2-PH1-125U-125D-940-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	236.2	2.1
10°-20°	621.4	5.6
20°-30°	911.2	8.2
30°-40°	1103.4	9.9
40°-50°	1085.1	9.7
50°-60°	944.6	8.4
60°-70°	656.7	5.9
70°-80°	311.3	2.8
80°-90°	69.6	0.6
90°-100°	324.8	2.9
100°-110°	1057.5	9.5
110°-120°	1046.1	9.4
120°-130°	854.9	7.6
130°-140°	698.7	6.3
140°-150°	544.2	4.9
150°-160°	392.3	3.5
160°-170°	239.8	2.1
170°-180°	80.9	0.7
0°-30°	1768.8	15.8
0°-40°	2872.3	25.7
0°-60°	4901.9	43.9
0°-90°	5939.6	53.1
90°-120°	2428.4	21.7
90°-150°	4526.1	40.5
90°-180°	5239.0	46.9
0°-180°	11178.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2685	2685	2685	2685	2685	
5°	2690	2688	2529	2450	2445	253
15°	2560	2280	2100	2085	2113	714
25°	2274	1934	1901	1959	1952	1046
35°	1995	1613	1694	1840	2084	1250
45°	1724	1277	1397	1446	1229	1325
55°	1362	994	1254	904	897	1216
65°	976	684	656	539	539	959
75°	503	348	258	184	179	533
85°	87	57	51	41	38	116
90°	0	3	7	6	6	5
95°	44	134	595	212	131	51
105°	180	259	1048	2001	1895	192
115°	332	396	853	1759	2069	329
125°	462	515	842	1388	1637	411
135°	558	616	838	1198	1352	431
145°	652	700	836	1032	1130	408
155°	744	768	841	924	959	343
165°	812	819	843	874	885	229
175°	846	846	846	852	850	80
180°	849	849	849	849	849	



TEST NUMBER: P854063

CATALOG NUMBER: SQ2-PH1-125U-125D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2684.8	2684.8	2684.8	2684.8	2684.8
2.5°	2678.7	2706.7	2644.0	2619.4	2615.4
5°	2690.0	2687.5	2529.0	2449.7	2444.7
7.5°	2640.9	2563.5	2374.2	2286.8	2282.8
10°	2598.0	2480.6	2276.1	2196.9	2196.9
12.5°	2587.8	2402.4	2196.4	2137.9	2149.9
15°	2559.7	2279.9	2099.9	2085.1	2112.6
17.5°	2466.7	2165.5	2024.7	2058.2	2090.1
20°	2401.3	2104.1	1979.8	2041.8	2071.8
22.5°	2346.1	2044.9	1947.1	2014.9	2030.9
25°	2273.6	1933.9	1900.6	1959.2	1951.7
27.5°	2186.7	1832.0	1854.1	1890.0	1894.5
30°	2125.4	1770.7	1811.2	1847.7	1880.2
32.5°	2066.1	1699.5	1764.2	1850.7	1925.1
35°	1995.1	1613.0	1693.7	1839.7	2084.5
37.5°	1920.5	1510.9	1622.7	1745.5	1823.4
40°	1867.4	1437.8	1573.6	1725.4	1545.5
42.5°	1810.2	1380.5	1500.0	1696.0	1392.2
45°	1724.3	1277.2	1397.3	1446.1	1228.7
47.5°	1623.2	1197.0	1327.9	1205.9	1120.9
50°	1545.5	1143.4	1295.2	1102.3	1047.4
52.5°	1469.9	1087.7	1272.7	1016.9	979.9
55°	1361.6	994.4	1254.3	904.1	896.7
57.5°	1246.6	899.4	1109.2	806.0	819.0
60°	1175.1	837.9	958.0	748.1	733.2
62.5°	1099.5	778.3	816.9	674.6	659.6
65°	975.8	683.6	656.5	539.0	539.0
67.5°	839.9	585.2	531.9	441.1	381.1
70°	745.9	521.1	452.2	351.6	311.7
72.5°	645.8	453.0	370.4	288.1	242.2
75°	503.2	348.4	258.0	183.8	178.8
77.5°	363.8	250.9	173.7	136.4	136.9
80°	275.9	191.0	112.4	109.9	112.4
82.5°	194.1	131.2	83.8	87.4	87.9
85°	86.9	56.9	51.1	40.8	38.3
87.5°	18.4	17.0	11.7	11.5	11.5
90°	0.0	3.1	7.3	6.3	6.3
92.5°	15.0	54.1	172.8	56.9	43.9
95°	43.9	133.7	595.3	212.3	130.6
97.5°	82.5	174.0	1010.4	615.4	375.6
100°	107.6	197.4	1166.7	1040.3	674.7
102.5°	136.0	222.6	1147.4	1539.1	1170.2
105°	179.6	259.3	1047.6	2000.8	1894.6
107.5°	226.9	301.8	952.7	2040.9	2153.4
110°	261.1	329.5	907.6	1991.2	2194.4



TEST NUMBER: P854063

CATALOG NUMBER: SQ2-PH1-125U-125D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	289.5	357.1	879.2	1901.4	2163.5
115°	332.1	396.5	853.3	1758.6	2069.1
117.5°	376.0	434.0	843.3	1627.8	1936.8
120°	401.1	458.3	840.8	1547.4	1846.6
122.5°	425.3	481.7	841.6	1477.5	1756.3
125°	461.6	514.8	841.8	1388.5	1636.7
127.5°	492.8	547.1	841.6	1321.8	1528.7
130°	512.8	568.0	840.8	1283.7	1468.5
132.5°	530.4	588.0	839.9	1248.3	1421.7
135°	557.7	615.9	837.6	1198.3	1351.5
137.5°	584.5	643.1	835.4	1147.6	1283.6
140°	603.7	659.9	834.5	1113.2	1241.9
142.5°	622.1	675.8	834.5	1080.3	1195.1
145°	651.7	699.7	835.6	1032.1	1130.1
147.5°	680.6	722.2	837.0	991.0	1066.8
150°	699.8	736.5	838.7	966.5	1030.9
152.5°	719.0	749.2	839.5	947.9	999.1
155°	743.6	768.2	840.8	924.1	958.8
157.5°	767.0	784.6	842.0	906.5	930.8
160°	781.2	795.5	842.9	895.5	914.9
162.5°	793.8	804.8	842.9	886.2	900.7
165°	811.5	818.7	842.9	874.4	884.6
167.5°	824.1	828.6	843.1	865.6	870.9
170°	832.4	834.5	843.9	859.6	861.7
172.5°	838.3	839.5	845.6	856.2	855.8
175°	846.0	846.0	846.0	852.2	850.2
177.5°	849.1	848.3	847.5	851.6	848.3
180°	849.1	849.1	849.1	849.1	849.1



TEST NUMBER: P854063

CATALOG NUMBER: SQ2-PH1-125U-125D-940-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.71	21.59	21.64	22.54	23.77	19.38	20.27	20.31	21.21	22.44
	3H	22.74	23.53	23.68	24.48	25.73	20.42	21.21	21.36	22.16	23.41
	4H	23.47	24.22	24.43	25.18	26.44	20.63	21.38	21.59	22.34	23.60
	6H	23.95	24.64	24.92	25.61	26.88	20.78	21.47	21.75	22.43	23.70
	8H	24.08	24.73	25.06	25.72	26.99	20.81	21.47	21.79	22.45	23.72
	12H	24.13	24.75	25.11	25.73	27.02	20.81	21.43	21.79	22.41	23.70
4H	2H	21.09	21.83	22.05	22.80	24.05	20.03	20.77	20.99	21.73	22.99
	3H	23.20	23.82	24.17	24.81	26.08	21.21	21.83	22.18	22.82	24.09
	4H	24.01	24.58	24.99	25.56	26.86	21.48	22.05	22.47	23.04	24.33
	6H	24.60	25.09	25.59	26.09	27.39	21.69	22.18	22.69	23.19	24.49
	8H	24.77	25.22	25.76	26.23	27.54	21.75	22.21	22.75	23.21	24.52
	12H	24.84	25.25	25.85	26.27	27.58	21.76	22.17	22.77	23.19	24.50
8H	4H	24.03	24.49	25.03	25.49	26.80	21.70	22.16	22.70	23.16	24.47
	6H	24.68	25.06	25.70	26.10	27.41	21.98	22.35	23.00	23.39	24.70
	8H	24.91	25.24	25.94	26.27	27.60	22.08	22.41	23.11	23.44	24.77
	12H	25.02	25.31	26.06	26.34	27.71	22.12	22.41	23.16	23.44	24.81
12H	4H	23.98	24.39	25.00	25.41	26.73	21.70	22.11	22.72	23.13	24.44
	6H	24.66	24.99	25.69	26.02	27.35	22.01	22.34	23.04	23.37	24.69
	8H	24.89	25.18	25.92	26.21	27.58	22.12	22.41	23.16	23.44	24.81