

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854246

Luminaire Tested: SQ2-PW1-025U-050D-940-UNV-STD-W-4

Issue Date: 7/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P854246
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-PW1-025U-050D-940-UNV-STD-W-4
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 250 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3533.6 lumens
Efficiency: N/A
Efficacy: 140.2 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 25.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P854246

CATALOG NUMBER: SQ2-PW1-025U-050D-940-UNV-STD-W-4

Luminous Intensity Polar Plot

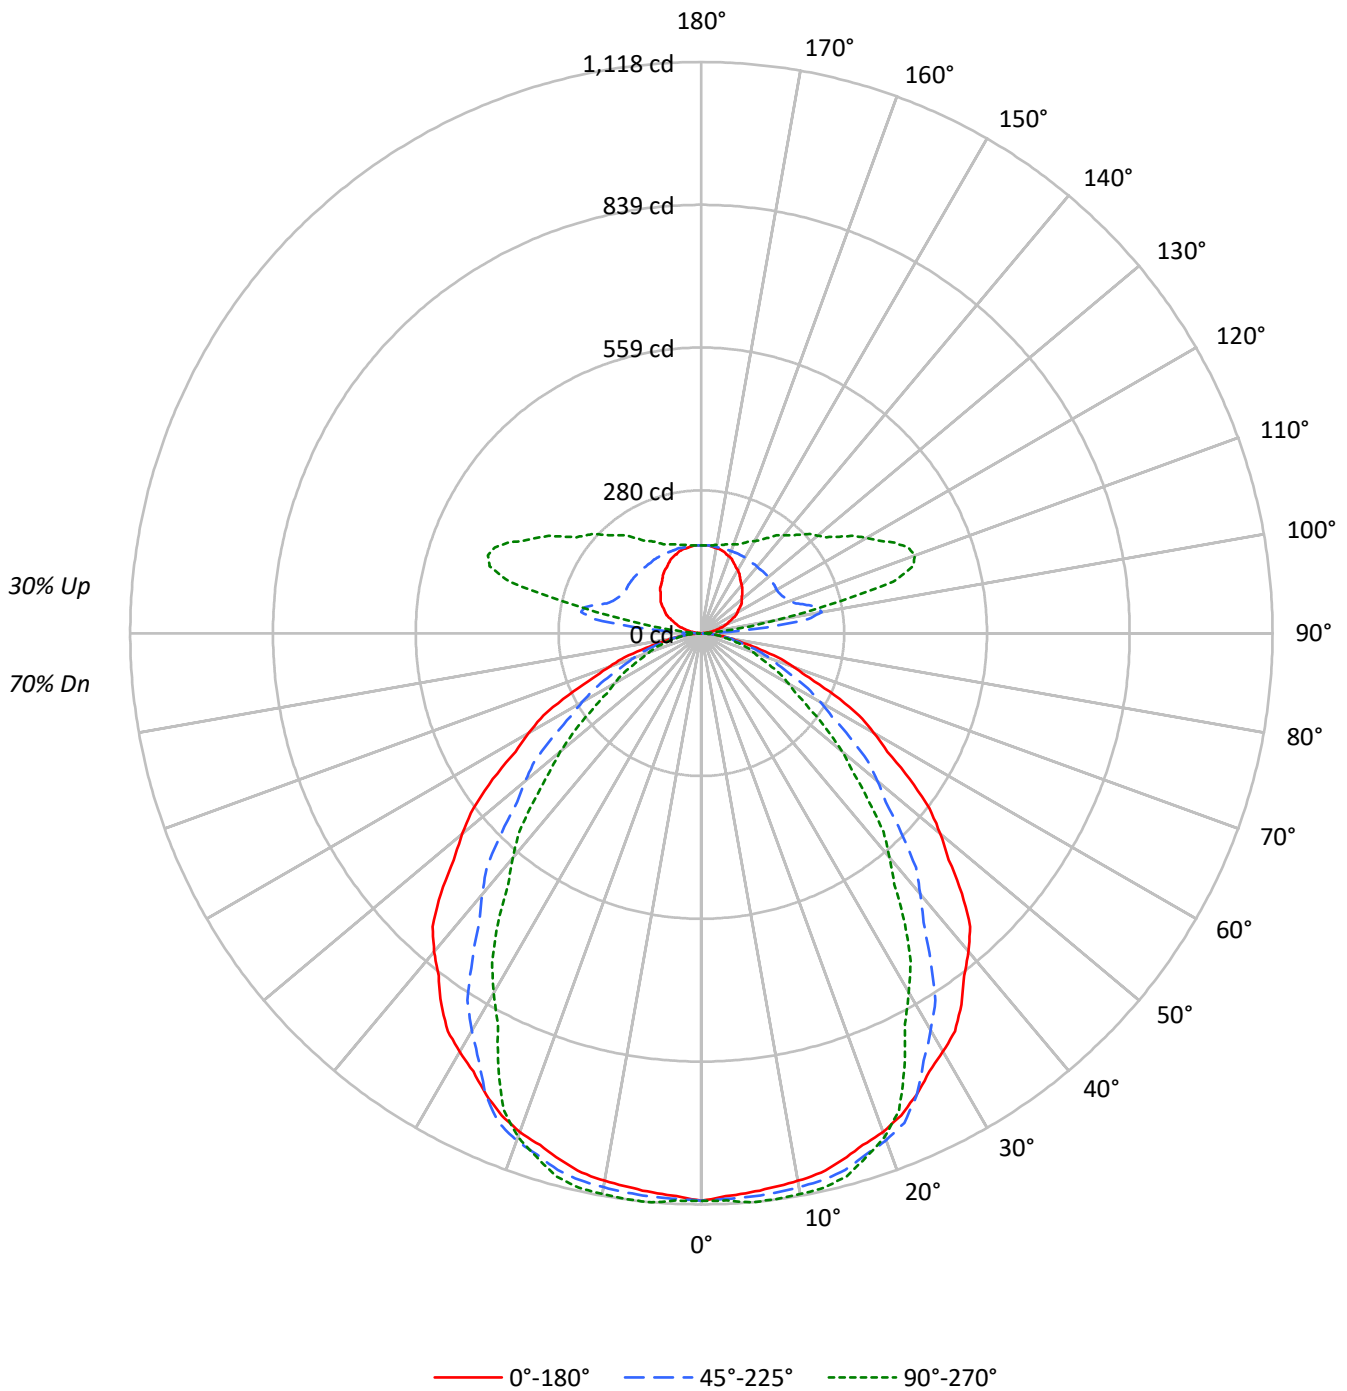



TEST NUMBER: P854246

CATALOG NUMBER: SQ2-PW1-025U-050D-940-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	74	74	74	70	
1	103	99	95	92	97	94	90	88	84	82	79	75	73	72	67	66	64	64	64	64	60	
2	94	87	81	76	89	83	78	73	75	71	67	67	64	61	60	58	55	55	55	55	52	
3	87	77	70	65	82	74	67	62	67	61	57	60	56	53	54	51	48	48	48	48	45	
4	80	69	61	55	75	66	59	53	60	54	50	54	49	46	49	45	42	42	42	42	39	
5	74	62	54	48	70	59	52	47	54	48	43	49	44	40	44	40	37	37	37	37	34	
6	68	56	48	42	64	54	46	41	49	43	38	44	39	36	40	36	33	33	33	33	31	
7	63	51	43	38	60	49	42	36	45	39	34	41	36	32	37	33	30	30	30	30	27	
8	59	47	39	34	56	45	38	33	41	35	31	37	32	29	34	30	27	27	27	27	25	
9	55	43	35	30	52	41	34	29	38	32	28	35	30	26	32	27	24	24	24	24	22	
10	52	39	32	27	49	38	31	27	35	29	25	32	27	24	29	25	22	22	22	22	21	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17933	17933	17933
5°	17812	17950	18122
10°	17846	18052	18279
15°	17840	18176	18389
20°	17847	18156	18029
25°	17751	17770	16753
30°	17631	16744	15146
35°	17493	15408	13677
40°	17144	14046	12083
45°	16472	12632	10554
50°	15330	11293	9033
55°	14024	9976	7324
60°	12571	8677	6319
65°	10991	7477	5616
70°	8988	6642	5094
75°	6993	5739	4685
80°	5216	4919	4128
85°	3520	3724	2353

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16472 cd/sqm



TEST NUMBER: P854246

CATALOG NUMBER: SQ2-PW1-025U-050D-940-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.8	3.0
10°-20°	306.4	8.7
20°-30°	451.0	12.8
30°-40°	493.0	14.0
40°-50°	442.3	12.5
50°-60°	329.9	9.3
60°-70°	208.5	5.9
70°-80°	103.3	2.9
80°-90°	24.6	0.7
90°-100°	69.7	2.0
100°-110°	216.8	6.1
110°-120°	212.1	6.0
120°-130°	173.1	4.9
130°-140°	141.6	4.0
140°-150°	110.5	3.1
150°-160°	79.8	2.3
160°-170°	48.8	1.4
170°-180°	16.4	0.5
0°-30°	863.1	24.4
0°-40°	1356.2	38.4
0°-60°	2128.4	60.2
0°-90°	2464.8	69.8
90°-120°	498.5	14.1
90°-150°	923.8	26.1
90°-180°	1069.0	30.3
0°-180°	3533.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1111	1111	1111	1111	1111	
5°	1099	1117	1108	1109	1118	105
15°	1067	1088	1087	1095	1100	301
25°	996	1018	998	956	940	459
35°	888	878	782	714	694	553
45°	721	664	553	484	462	553
55°	498	451	354	278	260	445
65°	288	264	196	157	147	285
75°	112	120	92	77	75	124
85°	19	24	20	14	13	24
90°	0	1	3	3	3	1
95°	10	28	128	47	31	11
105°	38	54	213	407	389	40
115°	68	80	173	357	418	67
125°	94	104	171	281	330	83
135°	113	125	170	243	273	87
145°	132	142	170	210	228	83
155°	151	156	171	188	194	70
165°	166	167	172	178	180	47
175°	172	172	172	173	172	16
180°	172	172	172	172	172	



TEST NUMBER: P854246

CATALOG NUMBER: SQ2-PW1-025U-050D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1110.7	1110.7	1110.7	1110.7	1110.7
2.5°	1103.1	1117.1	1108.1	1109.0	1111.5
5°	1099.0	1116.6	1107.5	1108.8	1118.1
7.5°	1093.5	1111.3	1104.5	1108.3	1117.4
10°	1088.5	1107.1	1101.1	1106.6	1114.9
12.5°	1081.7	1101.1	1096.9	1103.2	1111.5
15°	1067.3	1088.0	1087.4	1094.9	1100.1
17.5°	1050.6	1071.3	1070.3	1072.2	1074.7
20°	1038.7	1059.4	1056.7	1049.3	1049.3
22.5°	1021.8	1044.2	1037.3	1017.0	1010.4
25°	996.4	1018.1	997.5	955.9	940.4
27.5°	966.8	984.4	942.9	883.8	862.3
30°	945.7	959.1	898.1	833.1	812.4
32.5°	923.7	928.8	852.4	784.8	762.4
35°	887.5	878.2	781.7	713.6	693.9
37.5°	844.7	817.0	713.8	642.4	620.7
40°	813.4	774.1	666.4	595.0	573.3
42.5°	778.7	729.5	621.6	550.2	527.6
45°	721.4	663.5	553.2	484.0	462.2
47.5°	656.9	599.4	489.3	422.3	403.6
50°	610.3	554.5	449.6	382.4	359.6
52.5°	562.9	512.9	410.6	341.6	310.6
55°	498.2	450.6	354.4	277.8	260.2
57.5°	431.6	390.4	303.4	233.9	219.4
60°	389.3	353.1	268.7	210.2	195.7
62.5°	348.6	316.6	234.8	188.2	176.2
65°	287.7	263.9	195.7	157.4	147.0
67.5°	228.5	215.2	162.7	129.1	122.3
70°	190.4	186.3	140.7	113.1	107.9
72.5°	157.4	159.1	119.5	97.9	94.4
75°	112.1	120.4	92.0	77.2	75.1
77.5°	76.4	88.8	68.1	57.1	55.4
80°	56.1	68.5	52.9	44.4	44.4
82.5°	39.1	49.1	37.7	33.4	33.4
85°	19.0	24.2	20.1	13.7	12.7
87.5°	5.1	7.8	4.0	3.2	3.2
90°	0.0	1.0	3.2	3.2	3.2
92.5°	3.4	11.9	40.4	13.3	10.8
95°	9.5	28.1	127.8	47.2	30.6
97.5°	17.3	36.5	211.7	131.8	83.0
100°	23.2	40.8	238.8	223.3	149.0
102.5°	29.2	45.9	233.7	319.0	250.4
105°	38.0	53.5	213.4	407.4	388.8
107.5°	46.9	61.4	194.0	414.2	434.6
110°	52.8	67.3	183.8	404.5	444.8



TEST NUMBER: P854246

CATALOG NUMBER: SQ2-PW1-025U-050D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	58.7	72.4	178.8	387.0	438.0
115°	67.6	80.0	173.3	357.4	418.4
117.5°	76.3	87.6	170.9	329.1	391.5
120°	81.3	92.7	170.1	313.0	372.9
122.5°	86.4	97.8	170.9	299.4	354.3
125°	94.0	104.4	171.1	281.1	329.6
127.5°	100.2	110.7	171.1	267.4	308.7
130°	103.5	114.9	171.1	259.7	296.9
132.5°	107.8	119.1	170.3	252.9	287.6
135°	113.0	125.4	170.1	242.6	272.6
137.5°	119.2	130.5	170.1	232.4	259.7
140°	122.6	133.9	170.1	225.6	250.4
142.5°	126.8	137.3	170.1	218.8	241.1
145°	132.1	142.4	170.1	209.6	228.2
147.5°	138.4	147.3	171.1	201.1	215.7
150°	142.6	149.9	171.1	196.8	208.1
152.5°	146.0	152.4	171.1	192.5	202.2
155°	151.1	156.2	171.1	188.2	194.4
157.5°	156.1	160.1	171.1	184.3	188.3
160°	159.5	162.6	171.1	181.8	184.9
162.5°	162.1	164.3	171.1	180.1	182.3
165°	165.9	166.9	172.2	177.5	179.6
167.5°	168.2	168.4	171.1	176.0	177.1
170°	169.0	170.1	171.1	174.3	175.4
172.5°	170.7	170.9	172.0	173.5	173.7
175°	172.2	172.2	172.2	173.2	172.2
177.5°	172.2	172.2	172.2	172.2	172.2
180°	172.2	172.2	172.2	172.2	172.2



TEST NUMBER: P854246

CATALOG NUMBER: SQ2-PW1-025U-050D-940-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.76	19.77	19.54	20.56	21.53	15.25	16.26	16.02	17.05	18.01
	3H	20.09	21.00	20.88	21.80	22.79	16.46	17.37	17.25	18.17	19.16
	4H	20.48	21.33	21.28	22.14	23.14	16.92	17.77	17.73	18.58	19.58
	6H	20.69	21.47	21.51	22.29	23.31	17.24	18.03	18.06	18.85	19.86
	8H	20.72	21.47	21.55	22.31	23.32	17.32	18.07	18.15	18.90	19.92
	12H	20.73	21.44	21.56	22.26	23.31	17.34	18.05	18.17	18.88	19.92
4H	2H	18.88	19.73	19.69	20.54	21.55	15.95	16.80	16.76	17.61	18.61
	3H	20.44	21.15	21.26	21.99	23.01	17.35	18.06	18.17	18.90	19.92
	4H	20.96	21.60	21.79	22.44	23.49	17.90	18.54	18.74	19.39	20.43
	6H	21.30	21.85	22.15	22.71	23.77	18.31	18.87	19.17	19.73	20.79
	8H	21.38	21.89	22.23	22.75	23.82	18.42	18.94	19.28	19.80	20.86
	12H	21.40	21.86	22.27	22.74	23.81	18.45	18.91	19.33	19.80	20.87
8H	4H	21.01	21.52	21.86	22.38	23.45	18.24	18.76	19.10	19.62	20.68
	6H	21.45	21.87	22.33	22.78	23.84	18.75	19.18	19.63	20.08	21.14
	8H	21.59	21.97	22.49	22.87	23.95	18.91	19.29	19.81	20.19	21.27
	12H	21.67	22.00	22.56	22.89	24.02	18.98	19.31	19.88	20.20	21.34
12H	4H	20.97	21.43	21.85	22.32	23.39	18.26	18.73	19.14	19.61	20.68
	6H	21.44	21.82	22.33	22.71	23.80	18.82	19.19	19.71	20.09	21.17
	8H	21.61	21.94	22.50	22.83	23.96	19.01	19.34	19.90	20.23	21.37