

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854273

Luminaire Tested: SQ2-PW1-075U-075D-940-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P854273  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-11, G2-2308-131-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-PW1-075U-075D-940-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 750 LUMENS PER FOOT  
UPLIGHT 750 LUMENS PER FOOT  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6703.9 lumens  
Efficiency: N/A  
Efficacy: 134.1 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.22  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 50  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P854273

CATALOG NUMBER: SQ2-PW1-075U-075D-940-UNV-STD-W-4

### Luminous Intensity Polar Plot

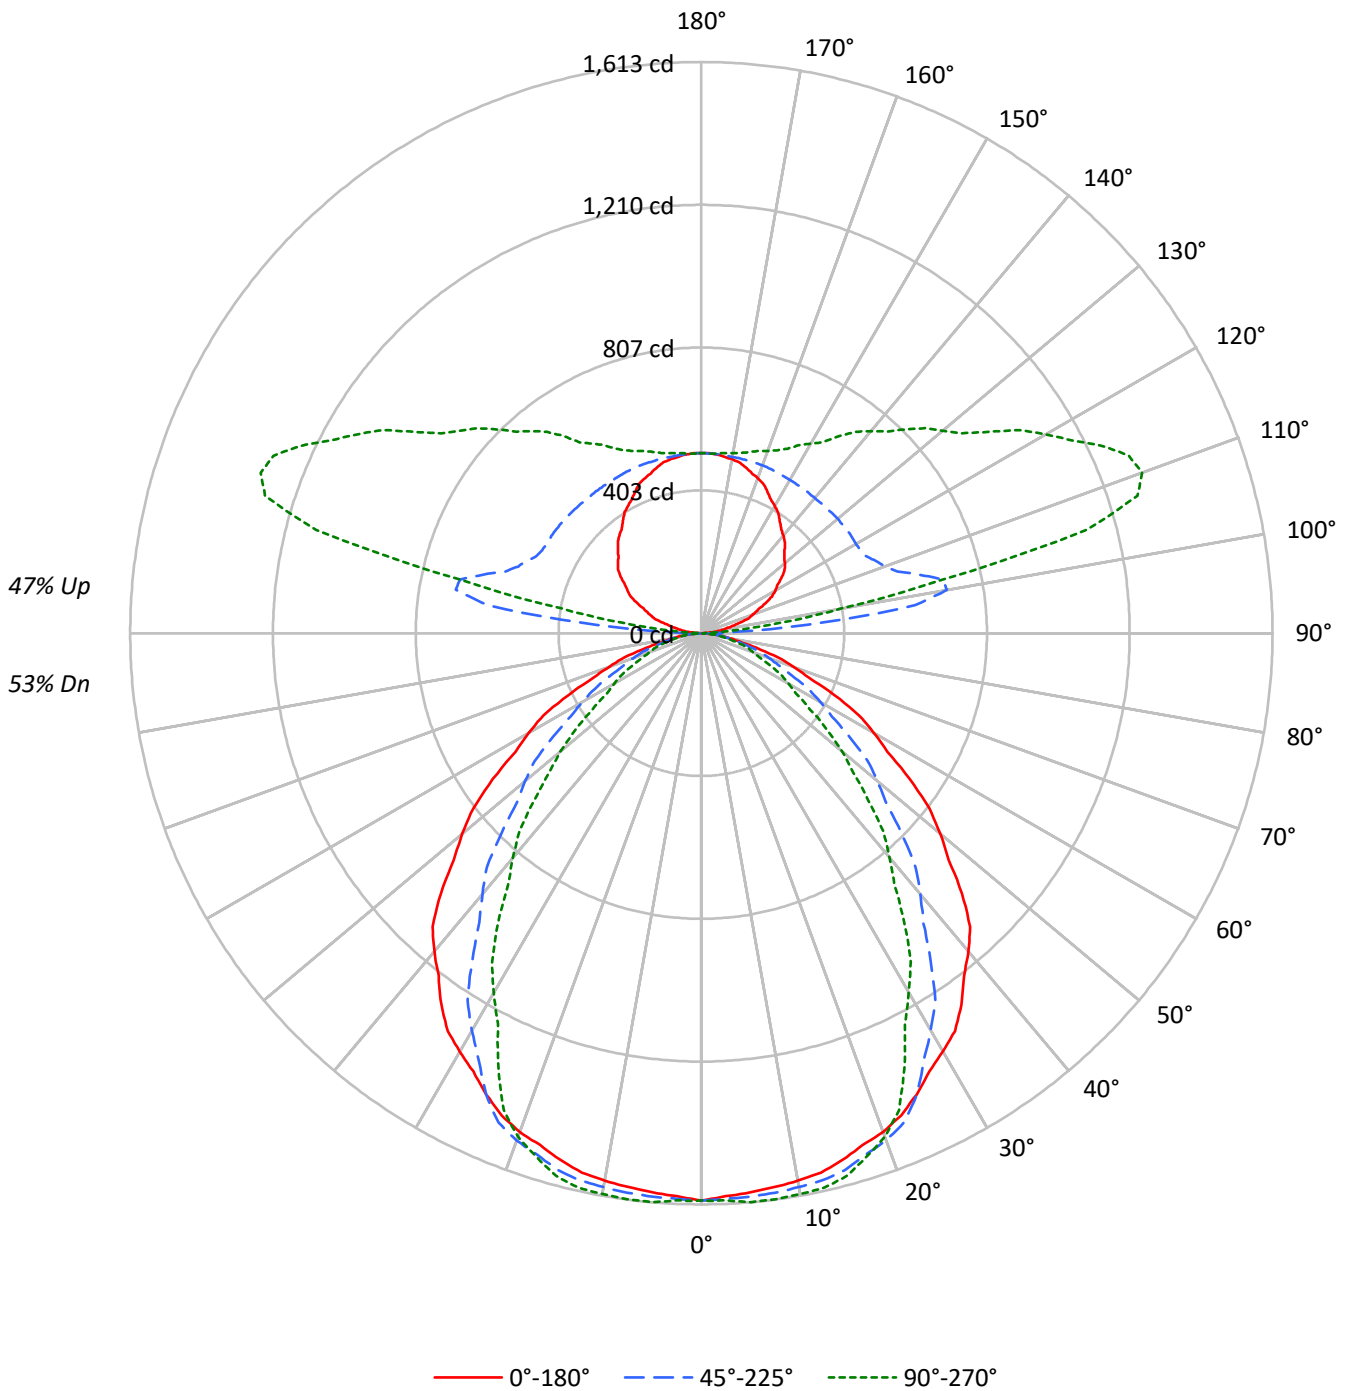



TEST NUMBER: P854273

CATALOG NUMBER: SQ2-PW1-075U-075D-940-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	95	91	88	92	88	85	82	75	73	71	64	62	61	53	52	51	46
2	91	84	78	73	84	78	73	68	67	63	60	57	54	52	47	46	44	39
3	83	74	67	61	77	69	63	58	60	55	51	51	47	44	43	40	38	34
4	76	66	58	52	71	62	55	50	53	48	44	46	42	39	38	36	33	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	26
6	65	53	45	40	60	50	43	38	43	38	34	37	33	30	32	29	26	23
7	60	48	40	35	56	45	38	33	40	34	30	34	30	27	29	26	23	21
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	27	24	21	19
9	52	40	33	28	48	38	31	27	33	28	24	29	25	22	25	22	19	17
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	25869	25869	25869
5°	25695	25893	26141
10°	25743	26043	26368
15°	25737	26220	26527
20°	25747	26192	26008
25°	25607	25634	24166
30°	25434	24153	21848
35°	25233	22227	19730
40°	24732	20261	17431
45°	23763	18224	15225
50°	22117	16289	13031
55°	20231	14390	10567
60°	18132	12516	9116
65°	15855	10785	8103
70°	12968	9578	7345
75°	10087	8284	6756
80°	7522	7094	5960
85°	5094	5372	3390

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23763 cd/sqm



TEST NUMBER: P854273

CATALOG NUMBER: SQ2-PW1-075U-075D-940-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	152.6	2.3
10°-20°	442.0	6.6
20°-30°	650.5	9.7
30°-40°	711.2	10.6
40°-50°	638.0	9.5
50°-60°	476.0	7.1
60°-70°	300.8	4.5
70°-80°	149.0	2.2
80°-90°	35.4	0.5
90°-100°	192.3	2.9
100°-110°	637.5	9.5
110°-120°	632.7	9.4
120°-130°	515.4	7.7
130°-140°	418.8	6.2
140°-150°	325.3	4.9
150°-160°	234.4	3.5
160°-170°	143.5	2.1
170°-180°	48.5	0.7
0°-30°	1245.1	18.6
0°-40°	1956.4	29.2
0°-60°	3070.4	45.8
0°-90°	3555.5	53.0
90°-120°	1462.5	21.8
90°-150°	2722.0	40.6
90°-180°	3148.0	47.0
0°-180°	6703.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1602	1602	1602	1602	1602	
5°	1585	1611	1598	1600	1613	151
15°	1540	1570	1569	1580	1587	435
25°	1437	1469	1439	1379	1356	662
35°	1280	1267	1128	1029	1001	798
45°	1041	957	798	698	667	798
55°	719	650	511	401	375	642
65°	415	381	282	227	212	411
75°	162	174	133	111	108	178
85°	28	35	29	20	18	35
90°	0	1	3	4	4	2
95°	27	81	348	124	83	31
105°	112	159	638	1204	1126	118
115°	199	238	514	1070	1251	197
125°	278	309	504	840	991	247
135°	333	367	500	721	814	257
145°	386	415	499	620	679	242
155°	441	457	502	554	575	203
165°	484	489	504	524	530	137
175°	506	506	508	511	510	48
180°	508	508	508	508	508	



TEST NUMBER: P854273

CATALOG NUMBER: SQ2-PW1-075U-075D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1602.2	1602.2	1602.2	1602.2	1602.2
2.5°	1591.2	1611.5	1598.6	1599.9	1603.4
5°	1585.4	1610.8	1597.6	1599.5	1612.9
7.5°	1577.5	1603.2	1593.4	1598.8	1612.0
10°	1570.2	1597.0	1588.5	1596.4	1608.3
12.5°	1560.4	1588.5	1582.4	1591.5	1603.4
15°	1539.7	1569.5	1568.6	1579.5	1587.0
17.5°	1515.5	1545.4	1543.9	1546.8	1550.3
20°	1498.5	1528.3	1524.4	1513.7	1513.7
22.5°	1474.0	1506.3	1496.3	1467.1	1457.6
25°	1437.4	1468.7	1438.9	1378.9	1356.5
27.5°	1394.7	1420.1	1360.2	1275.0	1243.9
30°	1364.2	1383.6	1295.5	1201.7	1171.9
32.5°	1332.4	1339.9	1229.6	1132.1	1099.9
35°	1280.2	1266.8	1127.7	1029.4	1001.0
37.5°	1218.6	1178.6	1029.7	926.7	895.4
40°	1173.4	1116.7	961.3	858.4	827.0
42.5°	1123.4	1052.4	896.6	793.7	761.1
45°	1040.7	957.1	798.1	698.2	666.8
47.5°	947.6	864.6	705.9	609.1	582.3
50°	880.5	799.9	648.5	551.6	518.8
52.5°	812.1	739.9	592.4	492.8	448.0
55°	718.7	650.1	511.2	400.7	375.4
57.5°	622.6	563.2	437.6	337.4	316.5
60°	561.5	509.3	387.6	303.2	282.3
62.5°	502.9	456.7	338.8	271.5	254.2
65°	415.0	380.7	282.3	227.0	212.1
67.5°	329.6	310.5	234.7	186.2	176.4
70°	274.7	268.7	202.9	163.1	155.6
72.5°	227.1	229.4	172.4	141.2	136.1
75°	161.7	173.7	132.8	111.3	108.3
77.5°	110.2	128.1	98.3	82.3	80.0
80°	80.9	98.8	76.3	64.1	64.1
82.5°	56.5	70.8	54.3	48.2	48.2
85°	27.5	34.9	29.0	19.8	18.3
87.5°	7.3	11.1	5.5	4.5	4.5
90°	0.0	1.0	3.2	4.2	4.2
92.5°	8.4	32.5	95.8	31.1	26.1
95°	27.4	80.9	348.5	124.3	83.2
97.5°	50.3	106.3	608.3	354.8	224.2
100°	66.3	119.9	704.3	604.9	401.1
102.5°	84.0	135.9	698.4	924.5	698.4
105°	111.6	159.0	638.0	1203.7	1125.5
107.5°	139.8	182.0	580.1	1232.1	1291.6
110°	155.8	198.0	550.6	1204.0	1324.4



TEST NUMBER: P854273

CATALOG NUMBER: SQ2-PW1-075U-075D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	172.7	214.0	532.9	1154.2	1307.6
115°	199.0	238.1	513.8	1069.6	1250.7
117.5°	225.1	259.9	506.8	988.7	1178.7
120°	241.1	275.1	504.3	938.0	1122.3
122.5°	255.4	288.6	504.3	896.4	1066.7
125°	277.9	308.8	504.3	840.4	990.7
127.5°	296.5	326.7	503.0	798.0	926.5
130°	307.4	339.3	502.2	773.3	888.6
132.5°	317.5	350.3	501.3	752.8	856.6
135°	332.7	366.7	500.1	721.2	813.8
137.5°	349.1	381.8	498.8	690.6	772.3
140°	360.1	392.0	498.0	670.2	745.4
142.5°	370.2	401.3	498.8	649.8	716.8
145°	386.4	415.2	499.0	620.4	679.1
147.5°	403.9	427.9	499.2	595.4	639.1
150°	414.8	436.4	500.1	580.9	618.0
152.5°	424.9	445.7	500.9	569.0	598.6
155°	441.1	456.6	502.2	554.2	574.8
157.5°	456.9	468.9	503.5	543.8	558.4
160°	465.3	475.6	504.3	536.1	547.5
162.5°	473.8	481.6	504.3	531.0	539.9
165°	484.3	489.4	504.3	524.4	529.6
167.5°	494.0	496.7	505.4	518.5	521.1
170°	499.0	500.1	505.4	515.9	516.9
172.5°	502.4	503.4	506.2	513.4	513.6
175°	506.4	506.4	507.5	510.6	509.6
177.5°	508.5	508.5	507.7	509.3	507.7
180°	508.5	508.5	508.5	508.5	508.5



TEST NUMBER: P854273

CATALOG NUMBER: SQ2-PW1-075U-075D-940-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.64	19.49	19.58	20.44	21.67	15.12	15.97	16.06	16.92	18.15
	3H	19.96	20.72	20.91	21.68	22.93	16.33	17.09	17.28	18.04	19.30
	4H	20.33	21.05	21.30	22.01	23.27	16.77	17.49	17.74	18.45	19.72
	6H	20.53	21.19	21.51	22.16	23.44	17.09	17.75	18.07	18.72	19.99
	8H	20.57	21.19	21.55	22.18	23.45	17.16	17.79	18.15	18.78	20.05
	12H	20.56	21.16	21.55	22.14	23.43	17.18	17.77	18.16	18.75	20.05
4H	2H	18.74	19.45	19.71	20.42	21.68	15.80	16.52	16.78	17.48	18.75
	3H	20.28	20.88	21.26	21.87	23.15	17.19	17.79	18.17	18.78	20.06
	4H	20.79	21.33	21.78	22.32	23.62	17.74	18.28	18.73	19.27	20.57
	6H	21.12	21.59	22.12	22.60	23.90	18.14	18.61	19.14	19.62	20.92
	8H	21.20	21.63	22.20	22.64	23.95	18.25	18.68	19.25	19.68	21.00
	12H	21.22	21.61	22.24	22.63	23.94	18.27	18.66	19.29	19.68	21.00
8H	4H	20.83	21.26	21.83	22.27	23.58	18.06	18.50	19.06	19.50	20.81
	6H	21.26	21.62	22.29	22.67	23.98	18.57	18.93	19.59	19.97	21.28
	8H	21.41	21.72	22.44	22.76	24.09	18.73	19.05	19.77	20.08	21.41
	12H	21.48	21.75	22.51	22.78	24.15	18.79	19.07	19.83	20.10	21.47
12H	4H	20.79	21.18	21.81	22.20	23.52	18.08	18.47	19.10	19.49	20.81
	6H	21.26	21.57	22.29	22.60	23.93	18.63	18.95	19.67	19.98	21.31
	8H	21.42	21.69	22.45	22.72	24.10	18.82	19.10	19.86	20.12	21.50