

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P854366

Luminaire Tested: SQ2-WBM-0U-050D-940-UNV-STD-W-4

Issue Date: 7/12/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P854366  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2-WBM-0U-050D-940-UNV-STD-W-4  
Description: CORELITE SQ2 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 500 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2319.1 lumens  
Efficiency: N/A  
Efficacy: 128.1 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.19 / 1.17  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 18.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P854366

CATALOG NUMBER: SQ2-WBM-0U-050D-940-UNV-STD-W-4

### Luminous Intensity Polar Plot

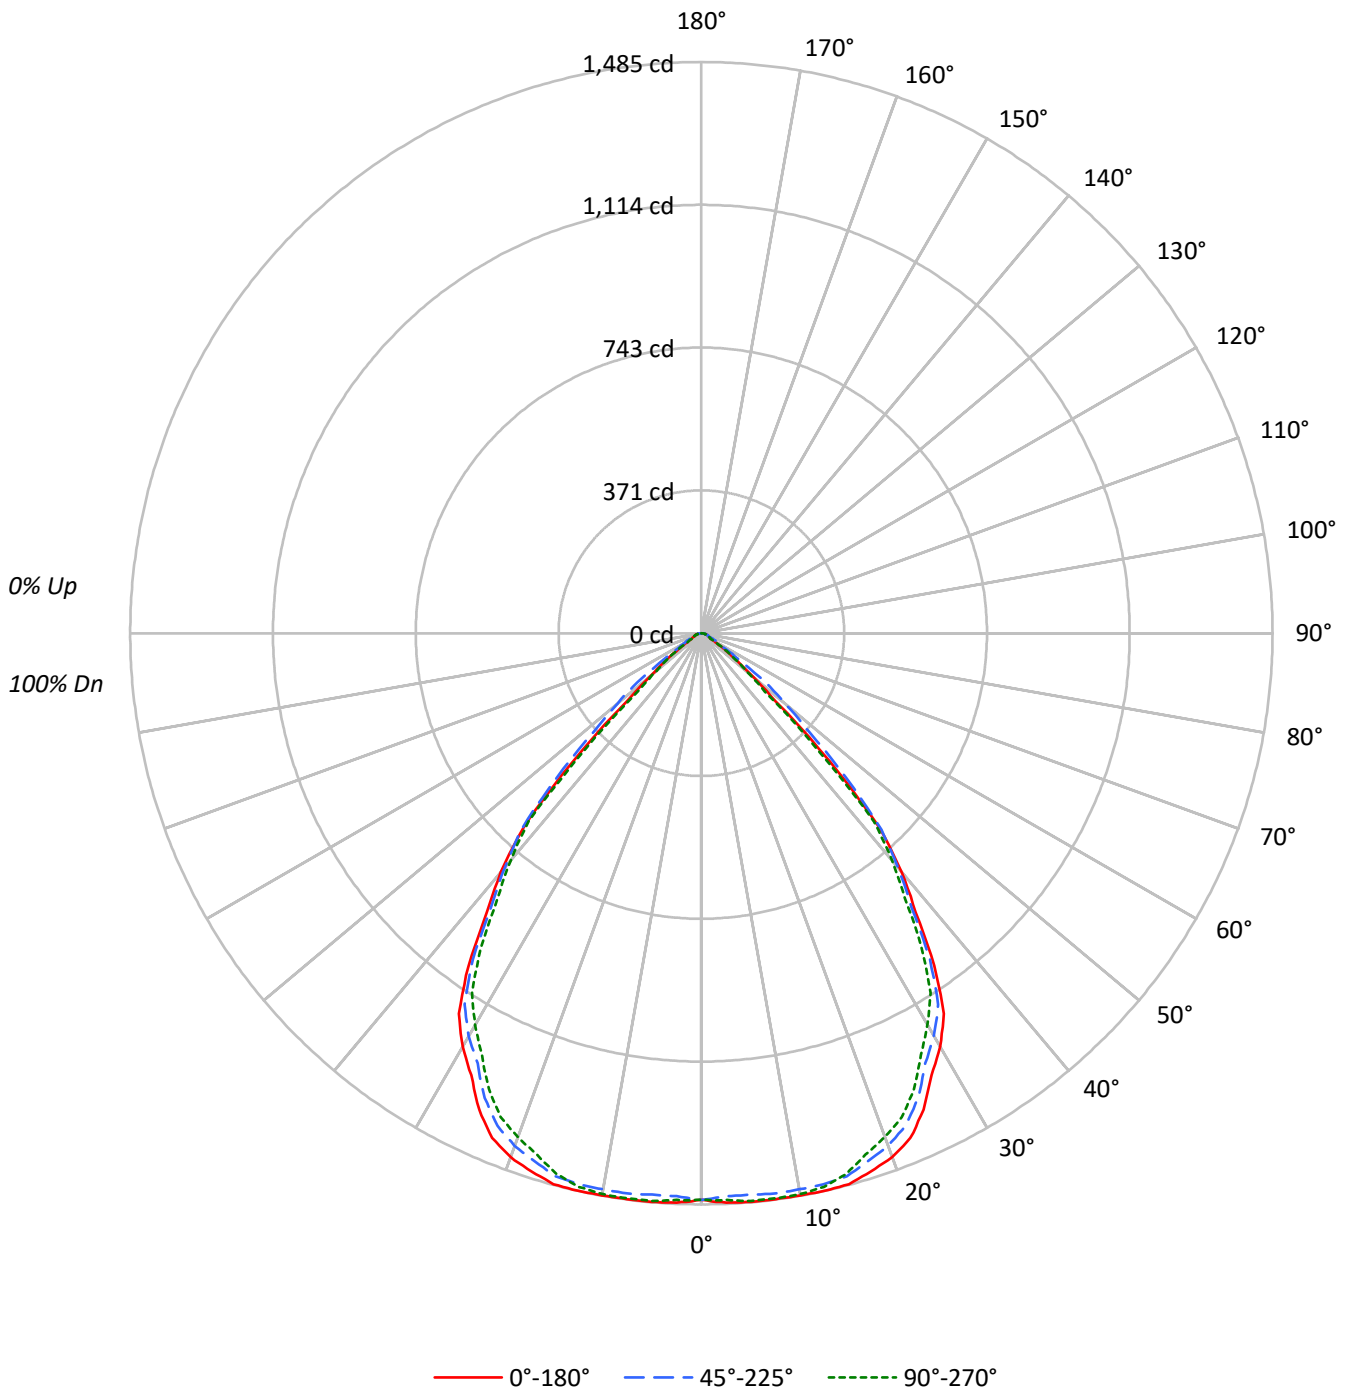



TEST NUMBER: P854366

CATALOG NUMBER: SQ2-WBM-0U-050D-940-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91				
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83				
3	99	92	86	81	97	90	85	80	87	83	79	85	81	78	83	79	77	75				
4	93	84	78	73	91	83	77	72	81	75	71	78	74	70	77	73	70	68				
5	87	77	70	65	85	76	70	65	74	69	65	73	68	64	71	67	63	62				
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56				
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51				
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47				
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43				
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	23791	23791	23791
5°	24052	23744	24018
10°	24330	24071	24279
15°	24789	24435	24329
20°	24917	24373	23953
25°	24346	23744	23291
30°	23152	22540	21929
35°	20808	20412	19681
40°	17100	16743	16252
45°	10821	12150	9757
50°	4197	7146	3853
55°	2024	3246	2055
60°	956	1605	888
65°	848	928	810
70°	850	850	798
75°	792	861	724
80°	790	790	688
85°	778	778	593

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°  
 Vertical Angle: 45°  
 Luminance: 12150 cd/sqm

TEST NUMBER: P854366

CATALOG NUMBER: SQ2-WBM-0U-050D-940-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.1	6.1
10°-20°	414.0	17.9
20°-30°	613.0	26.4
30°-40°	635.0	27.4
40°-50°	381.7	16.5
50°-60°	91.2	3.9
60°-70°	24.9	1.1
70°-80°	13.9	0.6
80°-90°	4.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1168.1	50.4
0°-40°	1803.0	77.7
0°-60°	2275.9	98.1
0°-90°	2319.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2319.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1474	1474	1474	1474	1474	
5°	1484	1479	1465	1484	1482	142
15°	1483	1492	1462	1463	1456	418
25°	1367	1379	1333	1316	1307	625
35°	1056	1054	1036	1016	998	649
45°	474	532	532	504	427	362
55°	72	82	115	77	73	73
65°	22	23	24	22	21	23
75°	13	14	14	13	12	14
85°	4	4	4	4	3	5
90°	0	0	0	0	0	



TEST NUMBER: P854366

CATALOG NUMBER: SQ2-WBM-0U-050D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1473.5	1473.5	1473.5	1473.5	1473.5
2.5°	1481.9	1477.0	1465.0	1478.5	1475.2
5°	1484.0	1478.9	1465.0	1484.0	1481.9
7.5°	1484.0	1480.7	1469.0	1484.8	1481.7
10°	1484.0	1484.0	1468.2	1484.0	1480.9
12.5°	1484.9	1489.0	1467.3	1478.9	1474.1
15°	1483.0	1492.3	1461.8	1462.7	1455.5
17.5°	1467.1	1481.6	1439.6	1431.1	1421.2
20°	1450.2	1464.7	1418.5	1402.4	1394.1
22.5°	1420.6	1435.9	1386.3	1371.1	1362.0
25°	1366.6	1379.0	1332.8	1315.7	1307.4
27.5°	1295.1	1300.7	1260.6	1244.6	1235.5
30°	1241.8	1240.8	1209.0	1188.6	1176.2
32.5°	1173.3	1174.7	1145.6	1125.9	1109.4
35°	1055.7	1053.6	1035.6	1016.1	998.5
37.5°	915.4	916.8	897.6	876.9	870.1
40°	811.3	814.4	794.4	772.1	771.1
42.5°	684.4	707.3	692.8	669.7	665.3
45°	473.9	531.8	532.1	503.9	427.3
47.5°	263.6	336.0	379.3	299.1	223.6
50°	167.1	214.7	284.5	179.2	153.4
52.5°	118.9	142.5	210.9	127.8	111.9
55°	71.9	82.3	115.3	77.1	73.0
57.5°	44.0	53.1	67.5	52.3	43.6
60°	29.6	37.9	49.7	33.7	27.5
62.5°	26.2	28.7	38.7	27.0	25.0
65°	22.2	23.2	24.3	22.2	21.2
67.5°	19.7	20.7	20.5	19.7	18.6
70°	18.0	19.0	18.0	18.0	16.9
72.5°	16.3	16.5	16.3	15.4	15.2
75°	12.7	13.7	13.8	12.7	11.6
77.5°	10.2	11.0	10.2	10.1	9.1
80°	8.5	8.5	8.5	8.4	7.4
82.5°	6.8	6.8	6.8	6.7	5.7
85°	4.2	4.2	4.2	4.2	3.2
87.5°	1.7	1.7	1.7	0.8	0.8
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P854366

CATALOG NUMBER: SQ2-WBM-0U-050D-940-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.13	9.31	8.49	9.62	9.94	7.72	8.90	8.09	9.22	9.53
	3H	8.67	9.71	9.05	10.04	10.40	8.27	9.31	8.65	9.64	10.00
	4H	8.94	9.90	9.34	10.25	10.63	8.52	9.48	8.93	9.83	10.22
	6H	9.16	10.04	9.58	10.41	10.81	8.73	9.60	9.14	9.98	10.37
	8H	9.25	10.07	9.68	10.47	10.87	8.79	9.62	9.23	10.01	10.42
	12H	9.30	10.09	9.74	10.48	10.91	8.82	9.62	9.26	10.00	10.43
4H	2H	8.19	9.15	8.59	9.50	9.88	7.82	8.78	8.22	9.13	9.52
	3H	8.94	9.72	9.36	10.12	10.53	8.58	9.36	9.00	9.76	10.17
	4H	9.34	10.03	9.77	10.45	10.89	8.96	9.65	9.39	10.07	10.51
	6H	9.70	10.29	10.16	10.74	11.21	9.30	9.89	9.76	10.34	10.81
	8H	9.83	10.38	10.30	10.83	11.30	9.41	9.96	9.88	10.41	10.88
	12H	9.93	10.41	10.42	10.90	11.37	9.48	9.96	9.97	10.45	10.93
8H	4H	9.43	9.99	9.91	10.44	10.91	9.08	9.64	9.56	10.09	10.56
	6H	9.90	10.35	10.41	10.85	11.33	9.54	9.99	10.05	10.49	10.97
	8H	10.10	10.51	10.63	11.02	11.52	9.73	10.13	10.26	10.65	11.15
	12H	10.29	10.64	10.80	11.14	11.72	9.88	10.24	10.40	10.74	11.31
12H	4H	9.42	9.90	9.91	10.39	10.86	9.07	9.56	9.56	10.04	10.52
	6H	9.91	10.31	10.44	10.83	11.33	9.56	9.96	10.09	10.48	10.98
	8H	10.16	10.52	10.68	11.02	11.59	9.80	10.16	10.32	10.66	11.23