

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937923

Luminaire Tested: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

Issue Date: 12/17/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P937923  
REPORT IS A COMBINATION OF REPORTS P933606 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8558.5 lumens  
Efficiency: N/A  
Efficacy: 102.6 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')  
CIE Type: Semi-Indirect

Input Watts (W): 83.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P937923  
CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

### Luminous Intensity Polar Plot

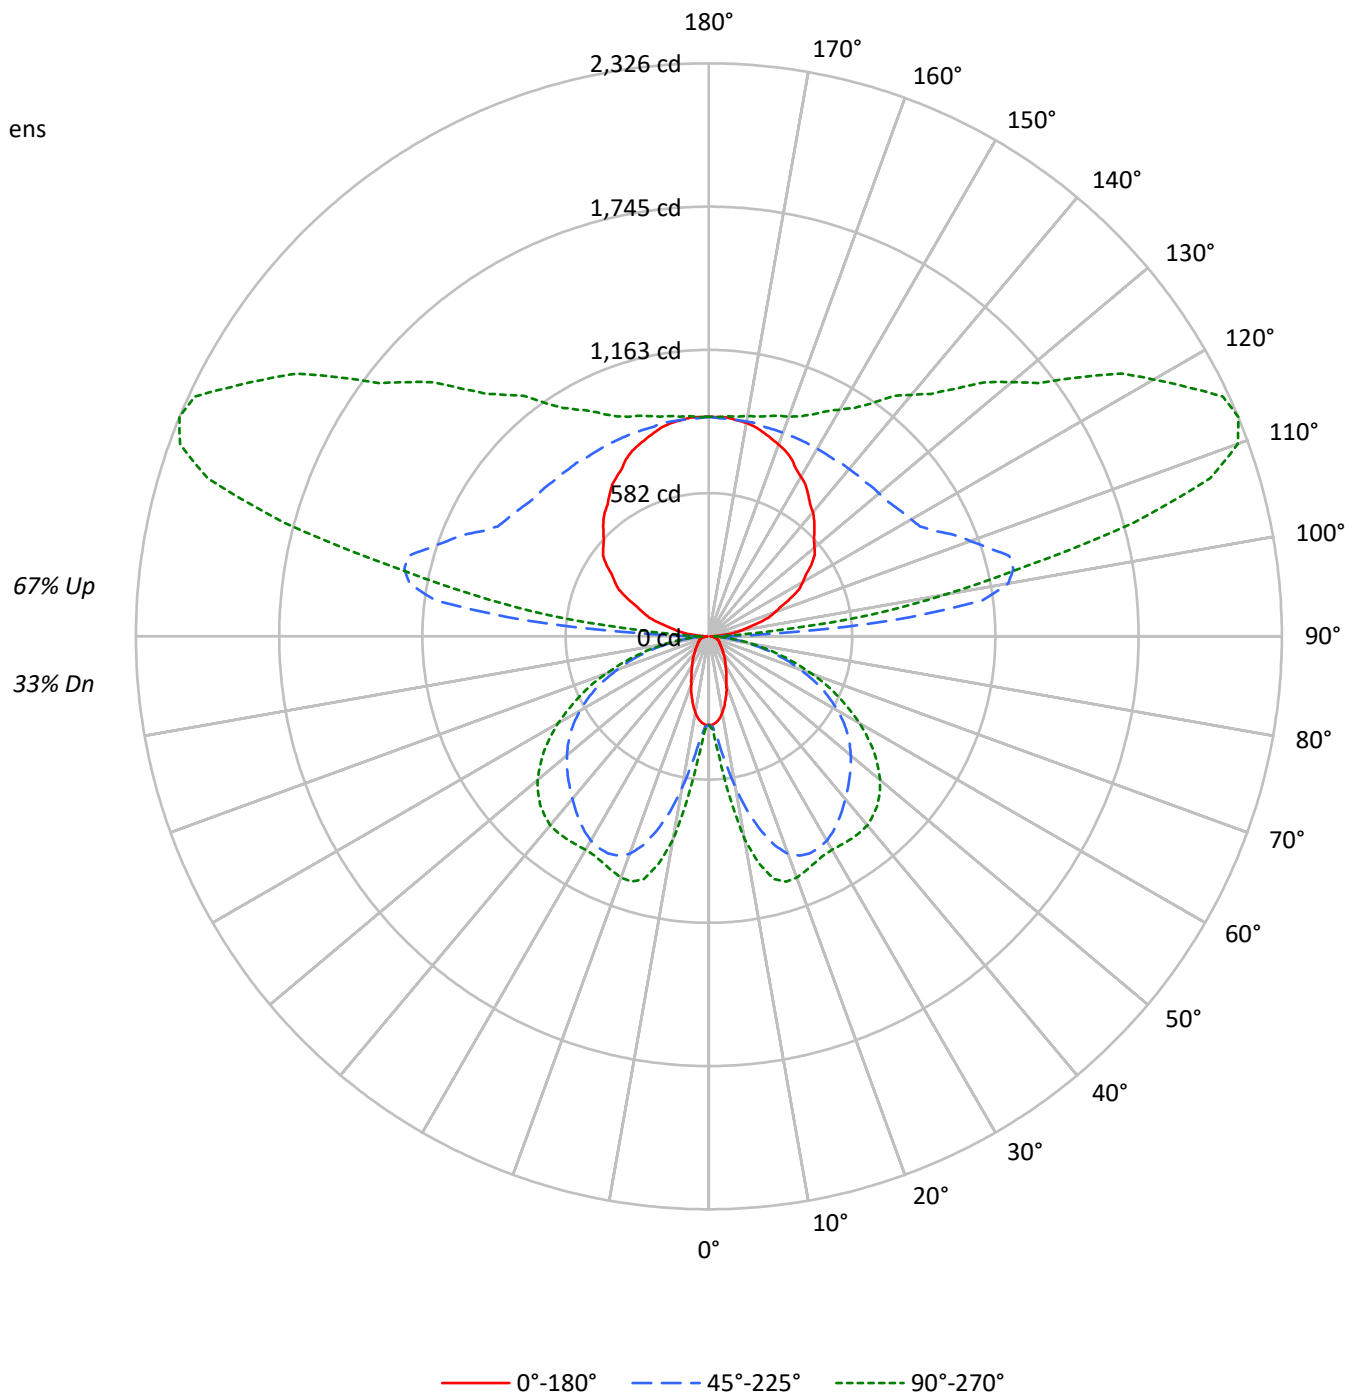



TEST NUMBER: P937923

CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	40	40	40	33
1	94	89	85	82	84	80	77	74	64	62	60	49	47	46	35	34	33	33	33	33	27
2	85	77	71	66	76	70	65	60	55	52	49	42	40	38	30	29	27	27	27	27	22
3	77	68	60	54	69	61	55	50	49	44	40	37	34	31	26	24	23	23	23	23	18
4	70	59	52	46	63	54	47	42	43	38	34	33	29	26	23	21	19	19	19	19	15
5	64	53	45	39	57	48	41	35	38	33	29	29	25	23	21	18	16	16	16	16	13
6	59	47	39	33	53	42	35	30	34	29	25	26	22	19	19	16	14	14	14	14	11
7	54	42	34	29	49	38	31	26	31	25	22	23	20	17	17	14	12	12	12	12	10
8	50	38	30	25	45	34	28	23	28	23	19	21	18	15	15	13	11	11	11	11	8
9	47	34	27	22	42	31	25	20	25	20	17	19	16	13	14	12	10	10	10	10	7
10	43	31	24	19	39	28	22	18	23	18	15	18	14	12	13	10	9	9	9	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2222	2222	2222
5°	2170	2567	2987
10°	1968	3742	4952
15°	1672	4887	5979
20°	1360	5663	6094
25°	1134	5924	5970
30°	956	5961	5959
35°	845	5860	6113
40°	736	5729	6273
45°	666	5633	6297
50°	611	5547	6193
55°	584	5421	5918
60°	598	5181	5484
65°	620	4816	4889
70°	659	4197	4130
75°	727	3419	3223
80°	791	2369	2172
85°	692	1254	1112

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 6297 cd/sqm



TEST NUMBER: P937923

CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	46.5	0.5
10°-20°	205.9	2.4
20°-30°	360.2	4.2
30°-40°	463.7	5.4
40°-50°	517.9	6.1
50°-60°	496.1	5.8
60°-70°	393.1	4.6
70°-80°	231.2	2.7
80°-90°	67.6	0.8
90°-100°	434.3	5.1
100°-110°	1141.9	13.3
110°-120°	1184.0	13.8
120°-130°	949.7	11.1
130°-140°	745.2	8.7
140°-150°	572.0	6.7
150°-160°	411.9	4.8
160°-170°	252.0	2.9
170°-180°	85.1	1.0
0°-30°	612.6	7.2
0°-40°	1076.4	12.6
0°-60°	2090.4	24.4
0°-90°	2782.3	32.5
90°-120°	2760.2	32.3
90°-150°	5027.1	58.7
90°-180°	5776.0	67.5
0°-180°	8558.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	359	359	359	359	359	
5°	350	375	423	478	496	32
15°	262	484	815	989	1020	73
25°	168	549	971	1014	1015	77
35°	113	524	915	967	1005	71
45°	77	418	808	926	968	60
55°	55	266	686	797	819	51
65°	44	141	509	573	581	44
75°	32	87	280	307	308	34
85°	12	27	69	76	77	12
90°	6	17	45	23	23	6
95°	57	225	748	386	262	64
105°	206	312	1262	1917	1788	218
115°	365	444	1011	2017	2302	361
125°	508	570	920	1554	1834	451
135°	606	667	891	1255	1423	469
145°	703	748	880	1070	1154	440
155°	794	816	880	966	994	365
165°	857	868	880	914	926	242
175°	891	891	886	897	897	85
180°	891	891	891	891	891	



TEST NUMBER: P937923

CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	359.2	359.2	359.2	359.2	359.2	359.2	359.2	359.2	359.2	359.2	359.2
2.5°	359.2	359.2	361.5	362.7	365.0	366.1	368.4	370.8	377.7	378.8	381.2
5°	350.0	354.6	369.6	375.4	391.5	413.5	422.7	437.7	468.9	478.2	483.9
7.5°	336.1	346.5	383.5	392.7	433.1	490.9	515.1	547.5	597.1	621.4	641.0
10°	314.2	336.1	401.9	423.9	489.7	577.5	622.5	667.6	742.7	776.2	788.9
12.5°	289.9	325.7	421.6	451.6	546.3	674.5	728.8	778.5	863.9	909.1	916.0
15°	262.2	310.7	440.1	483.9	606.4	755.4	815.4	876.7	956.4	988.8	996.8
17.5°	237.9	299.1	457.4	503.6	652.6	828.1	889.4	940.2	1004.9	1026.9	1032.6
20°	207.9	280.7	468.9	529.0	701.1	881.3	940.2	979.5	1023.4	1037.3	1039.6
22.5°	186.0	261.0	475.9	538.2	733.4	913.7	963.3	994.5	1024.6	1029.2	1030.3
25°	167.5	239.1	474.7	548.6	761.1	933.3	971.4	994.5	1011.9	1014.2	1014.2
27.5°	150.2	214.8	470.1	550.9	781.9	937.9	968.0	984.1	992.2	996.8	996.8
30°	135.1	191.7	458.5	546.3	791.2	933.3	957.6	965.7	973.7	980.7	984.1
32.5°	123.6	169.8	441.2	537.1	792.3	921.8	939.1	943.7	955.3	971.4	977.2
35°	113.2	147.8	421.6	524.4	785.4	903.3	914.8	919.5	942.6	966.8	974.9
37.5°	102.8	131.7	396.2	502.4	775.0	881.3	889.4	897.5	933.3	962.2	971.4
40°	92.4	117.8	366.1	478.2	758.8	854.7	861.6	874.3	921.8	955.3	964.5
42.5°	84.3	106.3	333.8	452.8	738.0	824.7	835.1	853.5	907.9	943.7	954.1
45°	77.4	94.7	299.1	418.1	711.5	793.5	808.5	833.9	891.7	926.4	935.6
47.5°	70.5	86.6	263.3	382.3	682.6	762.3	781.9	810.8	869.7	903.3	911.4
50°	64.7	78.5	227.5	344.2	651.4	728.8	751.9	781.9	842.0	873.2	883.7
52.5°	60.1	71.6	194.0	306.1	615.6	694.2	720.7	751.9	808.5	838.5	845.5
55°	55.4	65.8	165.2	265.7	578.7	657.2	686.1	716.1	771.5	797.0	801.6
57.5°	53.1	61.2	140.9	227.5	539.4	615.6	648.0	675.7	727.6	747.3	751.9
60°	49.7	57.8	122.4	195.2	496.6	576.3	604.1	631.8	675.7	691.8	695.3
62.5°	46.2	55.4	108.6	164.0	452.8	530.1	557.9	583.3	620.2	631.8	636.4
65°	43.9	53.1	98.2	140.9	407.7	481.6	509.4	531.3	561.3	572.9	575.2
67.5°	41.6	50.8	90.1	121.3	362.7	433.1	453.9	474.7	497.8	509.4	510.5
70°	38.1	48.5	83.2	107.4	316.5	377.7	395.0	417.0	435.4	441.2	444.7
72.5°	35.8	45.0	78.5	97.0	269.1	324.6	340.7	353.4	369.6	375.4	375.4
75°	32.3	40.4	73.9	86.6	220.6	265.7	279.5	292.2	304.9	307.2	303.8
77.5°	28.9	35.8	63.5	72.8	172.1	210.2	221.8	228.7	239.1	241.4	242.6
80°	24.3	31.2	49.7	56.6	124.7	154.8	162.9	168.6	177.9	177.9	180.2
82.5°	18.5	24.3	35.8	40.4	84.3	106.3	113.2	116.7	122.4	122.4	122.4
85°	11.6	15.0	23.1	26.6	50.8	64.7	69.3	70.5	75.1	76.2	76.2
87.5°	5.8	8.1	15.0	16.2	26.6	33.5	33.5	35.8	35.8	34.6	33.5
90°	6.0	10.8	15.6	16.7	26.3	39.0	45.4	40.3	30.3	22.7	22.7
92.5°	23.9	64.6	105.3	115.4	162.2	224.7	255.9	224.3	161.1	113.7	109.1
95°	57.4	131.8	206.2	224.8	399.2	631.9	748.1	667.6	506.5	385.7	372.0
97.5°	99.3	164.9	230.5	246.9	537.8	925.6	1119.5	1068.6	966.8	890.4	864.4
100°	131.6	191.1	250.6	265.5	588.2	1018.6	1233.7	1237.4	1244.9	1250.4	1219.4
102.5°	159.1	214.6	270.2	284.1	611.4	1047.7	1266.0	1330.8	1460.5	1557.8	1531.2
105°	205.7	252.8	299.8	311.5	628.5	1051.1	1262.4	1407.8	1698.5	1916.6	1902.3
107.5°	253.6	297.4	341.3	352.2	631.7	1004.3	1190.7	1393.5	1799.0	2103.2	2106.6
110°	285.8	325.4	365.0	374.9	626.9	962.8	1130.8	1357.5	1811.0	2151.1	2165.9



TEST NUMBER: P937923

CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	317.5	355.3	393.0	402.5	627.1	926.6	1076.4	1308.4	1772.5	2120.5	2143.4
115°	365.4	400.2	435.0	443.8	632.9	885.1	1011.2	1234.8	1681.8	2017.1	2048.8
117.5°	412.6	444.3	475.9	483.8	644.6	859.1	966.4	1168.1	1571.6	1874.2	1909.3
120°	440.1	469.9	499.7	507.1	654.2	850.3	948.4	1132.7	1501.3	1777.9	1812.0
122.5°	467.1	497.1	527.1	534.6	668.0	845.8	934.7	1100.7	1432.7	1681.6	1715.3
125°	508.3	535.7	563.0	569.9	686.5	842.0	919.8	1060.8	1342.7	1554.2	1585.3
127.5°	541.8	569.4	597.1	604.0	705.1	839.8	907.2	1028.3	1270.4	1452.0	1478.2
130°	559.7	589.5	619.2	626.7	718.6	841.1	902.4	1010.2	1225.7	1387.4	1411.6
132.5°	578.3	608.1	637.8	645.3	729.6	842.0	898.2	994.7	1187.6	1332.3	1354.0
135°	605.8	632.9	660.0	666.7	741.5	841.2	891.0	971.8	1133.4	1254.6	1273.3
137.5°	633.9	660.7	687.6	694.3	759.5	846.4	889.8	958.1	1094.7	1197.2	1212.4
140°	657.2	681.9	706.6	712.8	770.4	847.2	885.7	944.6	1062.7	1151.2	1165.5
142.5°	675.1	698.0	720.9	726.6	779.6	850.3	885.7	937.5	1041.1	1118.9	1131.2
145°	702.6	722.6	742.5	747.5	791.6	850.3	879.6	922.1	1006.9	1070.5	1079.8
147.5°	730.2	749.6	769.0	773.8	809.1	856.2	879.6	913.0	979.7	1029.8	1037.5
150°	748.1	765.7	783.2	787.6	818.3	859.2	879.6	907.8	964.2	1006.5	1012.7
152.5°	766.6	779.9	793.3	796.6	824.3	861.2	879.6	903.7	951.8	987.9	992.6
155°	794.2	804.0	813.8	816.3	837.4	865.6	879.6	898.8	937.1	965.8	969.0
157.5°	814.5	824.1	833.6	836.0	850.5	869.9	879.6	894.5	924.3	946.6	948.8
160°	828.2	835.7	843.2	845.0	856.5	871.9	879.6	892.4	917.9	937.1	938.3
162.5°	842.0	847.5	853.2	854.5	862.9	874.1	879.6	890.4	911.9	928.1	929.3
165°	856.9	862.0	867.1	868.3	872.1	877.1	879.6	887.3	902.8	914.4	915.6
167.5°	870.7	873.1	875.5	876.1	879.3	883.5	885.7	890.7	900.8	908.4	908.9
170°	879.6	882.0	884.4	885.0	885.3	885.5	885.7	890.7	900.8	908.4	908.4
172.5°	884.4	885.0	885.5	885.7	885.7	885.7	885.7	889.7	897.6	903.6	903.1
175°	891.0	891.0	891.0	891.0	889.3	886.9	885.7	888.2	893.3	897.0	897.0
177.5°	891.0	891.0	891.0	891.0	889.7	887.7	886.8	888.8	892.8	895.8	895.3
180°	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0



TEST NUMBER: P937923

CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	359.2	359.2
2.5°	383.5	381.2
5°	493.2	495.5
7.5°	664.1	663.0
10°	825.8	836.2
12.5°	943.7	946.0
15°	1015.3	1019.9
17.5°	1043.0	1044.2
20°	1044.2	1041.9
22.5°	1031.5	1029.2
25°	1016.5	1015.3
27.5°	1002.6	1003.8
30°	996.8	1000.3
32.5°	996.8	1002.6
35°	999.2	1004.9
37.5°	998.0	1004.9
40°	993.4	1001.5
42.5°	980.7	986.4
45°	961.0	968.0
47.5°	935.6	940.2
50°	903.3	907.9
52.5°	862.8	863.9
55°	814.3	818.9
57.5°	762.3	763.5
60°	704.6	708.0
62.5°	643.3	643.3
65°	578.7	581.0
67.5°	511.7	517.4
70°	443.5	444.7
72.5°	376.5	376.5
75°	307.2	308.4
77.5°	241.4	241.4
80°	179.0	180.2
82.5°	123.6	125.9
85°	77.4	77.4
87.5°	35.8	32.3
90°	22.7	22.7
92.5°	91.0	72.9
95°	317.2	262.5
97.5°	760.2	656.0
100°	1095.3	971.2
102.5°	1424.9	1318.6
105°	1845.2	1788.0
107.5°	2120.4	2134.3
110°	2225.5	2285.0





TEST NUMBER: P937923

CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	2234.8	2326.2
115°	2175.6	2302.3
117.5°	2049.9	2190.5
120°	1948.6	2085.2
122.5°	1850.0	1984.8
125°	1709.4	1833.5
127.5°	1582.9	1687.6
130°	1508.4	1605.1
132.5°	1440.7	1527.3
135°	1348.0	1422.7
137.5°	1273.6	1334.7
140°	1222.6	1279.7
142.5°	1180.3	1229.5
145°	1117.0	1154.2
147.5°	1068.4	1099.2
150°	1037.7	1062.7
152.5°	1011.5	1030.3
155°	981.4	993.9
157.5°	957.6	966.4
160°	943.4	948.4
162.5°	934.1	938.9
165°	920.7	925.7
167.5°	911.0	913.1
170°	908.4	908.4
172.5°	901.3	899.4
175°	897.0	897.0
177.5°	893.2	891.0
180°	891.0	891.0



TEST NUMBER: P937923  
 CATALOG NUMBER: SQ4-FB-125U-075D-927-1D-UNV-STD-W-6

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	1.91	2.66	3.00	3.75	5.25	15.08	15.82	16.17	16.91	18.41
	3H	2.61	3.28	3.70	4.38	5.89	16.90	17.57	18.00	18.67	20.19
	4H	2.90	3.54	4.01	4.64	6.16	17.54	18.17	18.65	19.28	20.80
	6H	3.15	3.73	4.26	4.83	6.37	17.96	18.54	19.08	19.65	21.18
	8H	3.21	3.77	4.33	4.89	6.41	18.07	18.63	19.19	19.75	21.28
	12H	3.22	3.75	4.35	4.87	6.42	18.14	18.67	19.26	19.78	21.33
4H	2H	9.11	9.74	10.22	10.84	12.36	15.34	15.97	16.45	17.07	18.60
	3H	10.66	11.19	11.78	12.32	13.86	17.37	17.90	18.49	19.03	20.56
	4H	10.75	11.24	11.88	12.36	13.91	18.13	18.61	19.25	19.73	21.28
	6H	10.76	11.18	11.89	12.32	13.86	18.65	19.07	19.79	20.21	21.76
	8H	10.73	11.12	11.86	12.25	13.82	18.81	19.20	19.94	20.33	21.90
	12H	10.68	11.04	11.83	12.18	13.75	18.89	19.25	20.04	20.39	21.96
8H	4H	12.18	12.58	13.32	13.71	15.27	18.18	18.57	19.31	19.70	21.26
	6H	12.42	12.74	13.57	13.92	15.48	18.80	19.12	19.95	20.29	21.85
	8H	12.44	12.72	13.60	13.87	15.45	19.01	19.29	20.17	20.45	22.03
	12H	12.40	12.65	13.56	13.80	15.41	19.15	19.40	20.31	20.55	22.16
12H	4H	12.32	12.68	13.47	13.82	15.39	18.12	18.48	19.27	19.62	21.19
	6H	12.68	12.96	13.84	14.11	15.69	18.78	19.06	19.94	20.21	21.79
	8H	12.74	12.99	13.90	14.14	15.75	19.00	19.25	20.16	20.40	22.01