

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937824

Luminaire Tested: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

Issue Date: 12/17/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P937824  
REPORT IS A COMBINATION OF REPORTS P933613 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10191.0 lumens  
Efficiency: N/A  
Efficacy: 107.0 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: Semi-Indirect

Input Watts (W): 95.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P937824  
CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

### Luminous Intensity Polar Plot

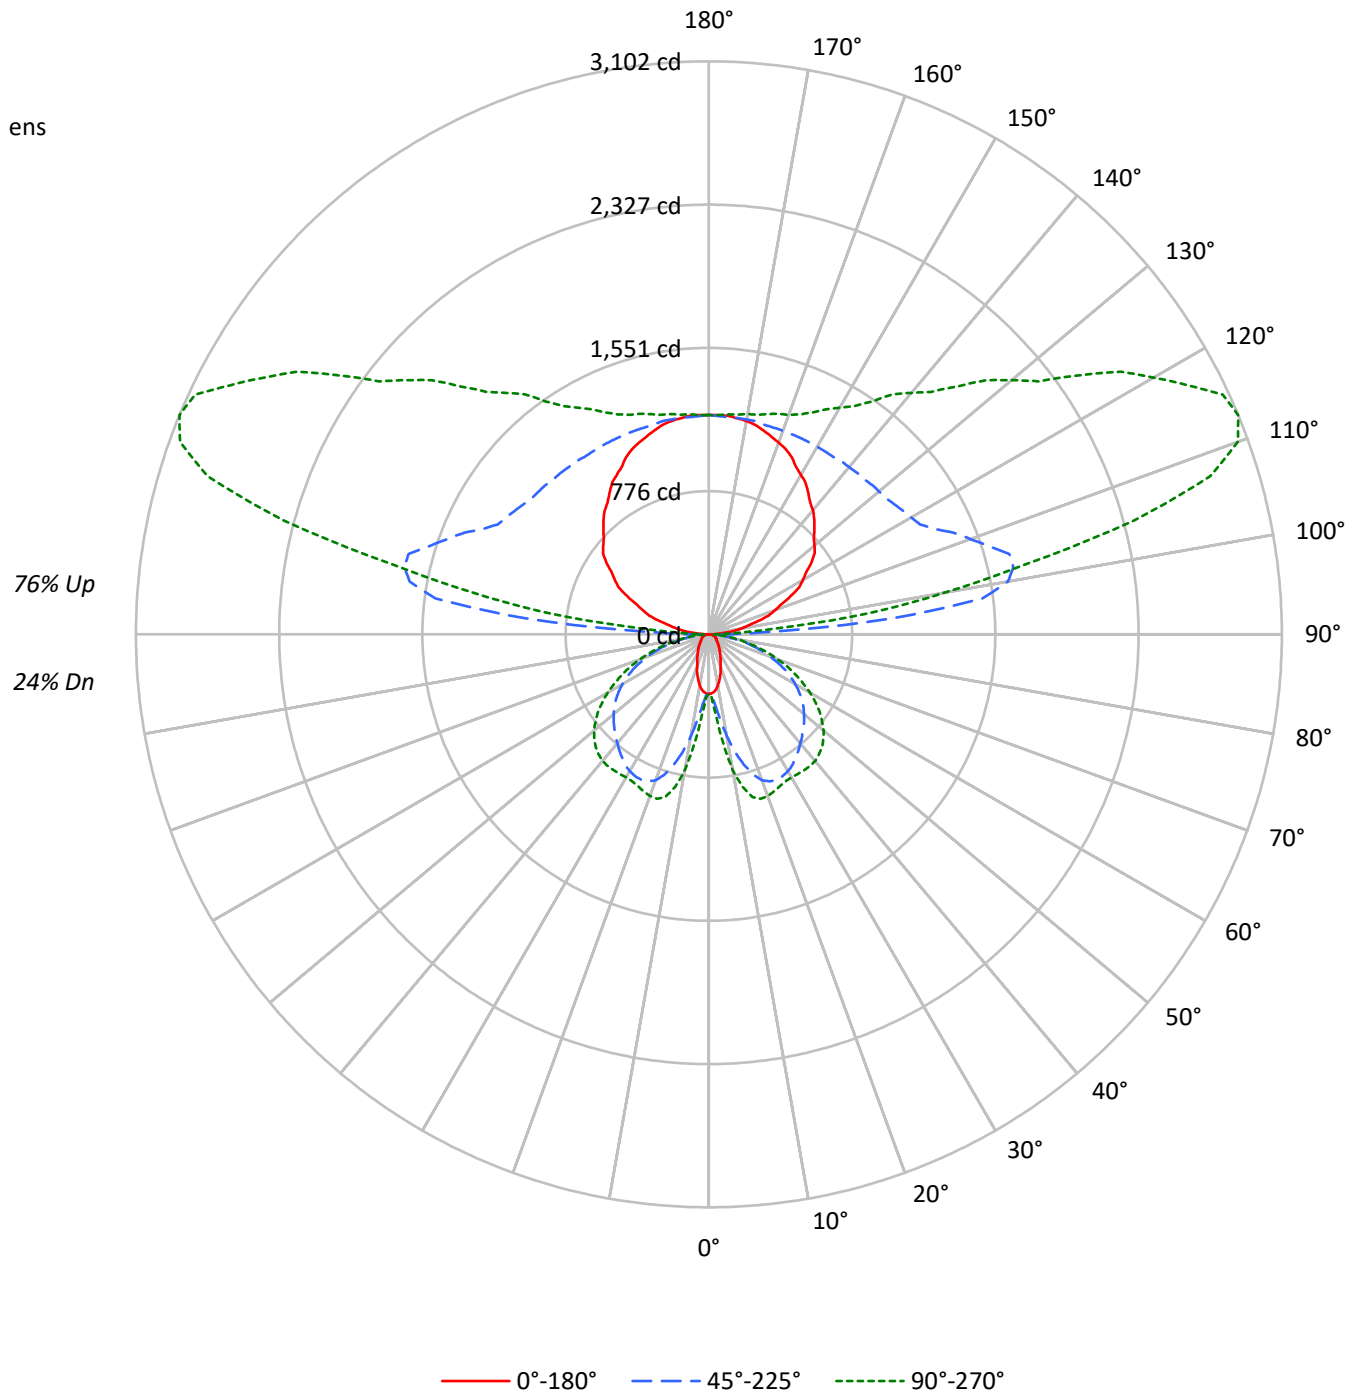



TEST NUMBER: P937824

CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	24				24
1	92	88	84	80	81	78	75	72	60	58	56	44	42	41	28	28	27	20				20
2	83	76	70	65	74	68	63	58	52	49	46	38	36	34	25	23	22	16				16
3	76	66	59	54	67	59	53	48	46	42	38	33	30	28	21	20	19	13				13
4	69	58	51	45	61	52	46	41	40	36	32	29	26	24	19	17	16	11				11
5	63	52	44	38	56	46	39	34	36	31	27	26	23	20	17	15	13	10				10
6	58	46	38	33	51	41	34	29	32	27	23	23	20	17	15	13	12	8				8
7	53	41	34	28	47	37	30	26	29	24	20	21	18	15	14	12	10	7				7
8	49	37	30	25	44	33	27	22	26	21	18	19	16	13	12	10	9	6				6
9	46	34	27	22	40	30	24	20	24	19	16	17	14	12	11	9	8	6				6
10	42	31	24	19	38	28	21	17	22	17	14	16	13	10	10	9	7	5				5

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1490	1490	1490
5°	1456	1722	2003
10°	1320	2511	3321
15°	1123	3280	4010
20°	914	3801	4086
25°	762	3978	4004
30°	643	4003	3996
35°	568	3937	4099
40°	495	3850	4206
45°	448	3787	4223
50°	411	3730	4153
55°	394	3647	3969
60°	403	3487	3678
65°	420	3243	3279
70°	447	2828	2770
75°	497	2306	2161
80°	541	1599	1456
85°	480	849	745

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 4223 cd/sqm



TEST NUMBER: P937824

CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	41.5	0.4
10°-20°	184.1	1.8
20°-30°	322.1	3.2
30°-40°	414.6	4.1
40°-50°	463.1	4.5
50°-60°	443.6	4.4
60°-70°	351.5	3.4
70°-80°	206.7	2.0
80°-90°	62.0	0.6
90°-100°	579.1	5.7
100°-110°	1522.5	14.9
110°-120°	1578.7	15.5
120°-130°	1266.3	12.4
130°-140°	993.6	9.7
140°-150°	762.6	7.5
150°-160°	549.2	5.4
160°-170°	336.0	3.3
170°-180°	113.5	1.1
0°-30°	547.8	5.4
0°-40°	962.4	9.4
0°-60°	1869.1	18.3
0°-90°	2489.3	24.4
90°-120°	3680.3	36.1
90°-150°	6702.9	65.8
90°-180°	7702.0	75.6
0°-180°	10191.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	321	321	321	321	321	
5°	313	336	378	428	443	29
15°	234	433	729	884	912	65
25°	150	491	869	907	908	69
35°	101	469	818	864	898	63
45°	69	374	723	828	866	54
55°	50	238	614	713	732	45
65°	39	126	456	512	520	39
75°	29	78	250	275	276	30
85°	10	24	62	68	69	11
90°	8	22	61	30	30	7
95°	76	300	998	514	350	85
105°	274	415	1683	2556	2384	291
115°	487	592	1348	2690	3070	481
125°	678	760	1226	2072	2445	602
135°	808	889	1188	1673	1897	625
145°	937	997	1173	1427	1539	587
155°	1059	1088	1173	1288	1325	487
165°	1143	1158	1173	1219	1234	322
175°	1188	1188	1181	1196	1196	113
180°	1188	1188	1188	1188	1188	



TEST NUMBER: P937824

CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	321.2	321.2	321.2	321.2	321.2	321.2	321.2	321.2	321.2	321.2	321.2
2.5°	321.2	321.2	323.2	324.3	326.3	327.4	329.5	331.6	337.7	338.7	340.8
5°	312.9	317.1	330.5	335.6	350.1	369.8	378.0	391.4	419.3	427.6	432.7
7.5°	300.5	309.8	342.9	351.1	387.3	438.9	460.6	489.6	533.9	555.6	573.2
10°	280.9	300.5	359.4	379.1	437.9	516.4	556.7	597.0	664.0	694.0	705.4
12.5°	259.3	291.2	377.0	403.8	488.5	603.1	651.7	696.1	772.5	812.8	819.0
15°	234.5	277.8	393.5	432.7	542.2	675.4	729.2	783.9	855.2	884.0	891.3
17.5°	212.8	267.5	409.0	450.3	583.5	740.5	795.3	840.7	898.5	918.1	923.3
20°	185.9	250.9	419.3	473.0	626.9	788.0	840.7	875.8	915.1	927.5	929.5
22.5°	166.2	233.4	425.5	481.2	655.8	817.0	861.3	889.3	916.1	920.2	921.2
25°	149.8	213.8	424.5	490.6	680.6	834.5	868.6	889.3	904.8	906.8	906.8
27.5°	134.3	192.1	420.3	492.6	699.2	838.6	865.5	880.0	887.2	891.3	891.3
30°	120.8	171.5	410.0	488.5	707.5	834.5	856.2	863.4	870.6	876.9	880.0
32.5°	110.5	151.8	394.5	480.2	708.5	824.1	839.7	843.8	854.1	868.6	873.7
35°	101.2	132.2	377.0	468.9	702.3	807.7	818.0	822.1	842.8	864.5	871.6
37.5°	91.9	117.7	354.3	449.3	693.0	788.0	795.3	802.5	834.5	860.3	868.6
40°	82.6	105.3	327.4	427.6	678.5	764.3	770.5	781.9	824.1	854.1	862.4
42.5°	75.4	95.0	298.5	404.9	660.0	737.4	746.7	763.2	811.8	843.8	853.1
45°	69.2	84.7	267.5	373.8	636.2	709.6	723.0	745.7	797.3	828.3	836.5
47.5°	63.0	77.5	235.5	341.9	610.4	681.7	699.2	725.0	777.7	807.7	814.9
50°	57.8	70.2	203.4	307.8	582.5	651.7	672.4	699.2	752.9	780.8	790.1
52.5°	53.7	64.1	173.5	273.7	550.5	620.7	644.5	672.4	723.0	749.8	756.0
55°	49.6	58.9	147.7	237.5	517.4	587.7	613.5	640.3	689.9	712.6	716.8
57.5°	47.5	54.7	126.0	203.4	482.3	550.5	579.4	604.2	650.6	668.2	672.4
60°	44.4	51.7	109.5	174.6	444.1	515.4	540.2	564.9	604.2	618.6	621.8
62.5°	41.3	49.6	97.1	146.7	404.9	474.1	498.8	521.6	554.6	564.9	569.1
65°	39.3	47.5	87.8	126.0	364.6	430.7	455.5	475.1	502.0	512.3	514.4
67.5°	37.2	45.4	80.5	108.4	324.3	387.3	405.9	424.5	445.1	455.5	456.5
70°	34.1	43.4	74.4	96.0	283.0	337.7	353.2	372.8	389.4	394.5	397.6
72.5°	32.0	40.3	70.2	86.8	240.6	290.2	304.7	316.0	330.5	335.6	335.6
75°	29.0	36.1	66.1	77.5	197.3	237.5	249.9	261.3	272.7	274.7	271.7
77.5°	25.8	32.0	56.8	65.1	153.9	188.0	198.3	204.5	213.8	215.8	216.9
80°	21.7	27.9	44.4	50.6	111.6	138.4	145.6	150.8	159.1	159.1	161.1
82.5°	16.6	21.7	32.0	36.1	75.4	95.0	101.2	104.3	109.5	109.5	109.5
85°	10.3	13.4	20.6	23.7	45.4	57.8	62.0	63.0	67.1	68.1	68.1
87.5°	5.2	7.2	13.4	14.5	23.7	30.0	30.0	32.0	32.0	31.0	30.0
90°	8.0	14.4	20.7	22.3	35.1	52.1	60.6	53.8	40.3	30.3	30.3
92.5°	31.9	86.1	140.4	153.9	216.4	299.6	341.3	299.1	214.8	151.5	145.5
95°	76.5	175.8	275.0	299.8	532.4	842.5	997.5	890.1	675.4	514.3	496.0
97.5°	132.4	219.9	307.5	329.3	717.1	1234.2	1492.6	1424.8	1289.1	1187.3	1152.5
100°	175.4	254.8	334.2	354.0	784.3	1358.0	1645.0	1649.9	1659.8	1667.3	1625.9
102.5°	212.1	286.1	360.2	378.8	815.2	1397.1	1688.0	1774.5	1947.4	2077.1	2041.7
105°	274.3	337.0	399.7	415.4	838.0	1401.5	1683.2	1877.0	2264.7	2555.5	2536.5
107.5°	338.1	396.6	455.0	469.6	842.2	1339.1	1587.5	1857.9	2398.7	2804.3	2808.9
110°	381.2	434.0	486.8	500.0	835.9	1283.8	1507.8	1810.1	2414.6	2868.0	2887.9



TEST NUMBER: P937824

CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	423.4	473.7	524.1	536.6	836.1	1235.5	1435.2	1744.6	2363.3	2827.4	2857.9
115°	487.2	533.6	580.0	591.6	843.8	1180.2	1348.3	1646.3	2242.4	2689.5	2731.7
117.5°	550.2	592.4	634.5	645.0	859.6	1145.5	1288.5	1557.5	2095.4	2498.9	2545.8
120°	586.8	626.5	666.2	676.1	872.3	1133.8	1264.6	1510.4	2001.8	2370.5	2416.0
122.5°	622.7	662.7	702.8	712.8	890.6	1127.7	1246.2	1467.5	1910.2	2242.2	2287.1
125°	677.8	714.3	750.8	759.8	915.3	1122.7	1226.3	1414.3	1790.3	2072.3	2113.6
127.5°	722.4	759.3	796.1	805.3	940.1	1119.7	1209.6	1371.0	1693.8	1935.9	1970.8
130°	746.3	786.0	825.7	835.6	958.1	1121.5	1203.2	1346.9	1634.3	1849.8	1882.1
132.5°	771.0	810.7	850.4	860.3	972.7	1122.7	1197.6	1326.2	1583.5	1776.5	1805.3
135°	807.7	843.8	880.0	889.0	988.7	1121.6	1188.0	1295.8	1511.2	1672.8	1697.7
137.5°	845.2	881.0	916.8	925.7	1012.6	1128.5	1186.4	1277.5	1459.7	1596.3	1616.7
140°	876.3	909.2	942.2	950.4	1027.3	1129.7	1180.9	1259.6	1416.9	1534.9	1553.9
142.5°	900.2	930.7	961.1	968.7	1039.4	1133.7	1180.9	1249.9	1388.2	1491.8	1508.2
145°	936.9	963.4	990.1	996.7	1055.4	1133.7	1172.9	1229.4	1342.5	1427.3	1439.7
147.5°	973.6	999.5	1025.3	1031.8	1078.8	1141.5	1172.9	1217.4	1306.3	1373.1	1383.3
150°	997.5	1020.9	1044.3	1050.1	1091.0	1145.6	1172.9	1210.4	1285.6	1342.0	1350.3
152.5°	1022.2	1039.9	1057.6	1062.1	1099.0	1148.2	1172.9	1205.0	1269.1	1317.2	1323.6
155°	1058.9	1072.0	1085.1	1088.4	1116.6	1154.1	1172.9	1198.4	1249.5	1287.7	1291.9
157.5°	1086.0	1098.7	1111.5	1114.7	1134.1	1159.9	1172.9	1192.7	1232.4	1262.2	1265.1
160°	1104.3	1114.3	1124.2	1126.7	1142.1	1162.6	1172.9	1189.9	1223.9	1249.4	1251.1
162.5°	1122.7	1130.1	1137.5	1139.4	1150.5	1165.4	1172.9	1187.2	1215.9	1237.5	1239.1
165°	1142.6	1149.4	1156.1	1157.8	1162.8	1169.5	1172.9	1183.2	1203.7	1219.1	1220.8
167.5°	1160.9	1164.1	1167.3	1168.1	1172.3	1178.0	1180.9	1187.6	1201.0	1211.1	1211.8
170°	1172.9	1176.1	1179.3	1180.1	1180.3	1180.7	1180.9	1187.6	1201.0	1211.1	1211.1
172.5°	1179.3	1179.9	1180.7	1180.9	1180.9	1180.9	1180.9	1186.2	1196.8	1204.8	1204.2
175°	1188.0	1188.0	1188.0	1188.0	1185.6	1182.5	1180.9	1184.3	1191.0	1196.0	1196.0
177.5°	1188.0	1188.0	1188.0	1188.0	1186.2	1183.7	1182.5	1185.1	1190.4	1194.4	1193.7
180°	1188.0	1188.0	1188.0	1188.0	1188.0	1188.0	1188.0	1188.0	1188.0	1188.0	1188.0



TEST NUMBER: P937824

CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	321.2	321.2
2.5°	342.9	340.8
5°	441.0	443.1
7.5°	593.8	592.8
10°	738.4	747.7
12.5°	843.8	845.8
15°	907.8	912.0
17.5°	932.6	933.6
20°	933.6	931.5
22.5°	922.3	920.2
25°	908.8	907.8
27.5°	896.4	897.5
30°	891.3	894.4
32.5°	891.3	896.4
35°	893.4	898.5
37.5°	892.4	898.5
40°	888.2	895.4
42.5°	876.9	882.0
45°	859.3	865.5
47.5°	836.5	840.7
50°	807.7	811.8
52.5°	771.5	772.5
55°	728.1	732.3
57.5°	681.7	682.7
60°	630.0	633.1
62.5°	575.3	575.3
65°	517.4	519.5
67.5°	457.5	462.7
70°	396.6	397.6
72.5°	336.7	336.7
75°	274.7	275.7
77.5°	215.8	215.8
80°	160.1	161.1
82.5°	110.5	112.6
85°	69.2	69.2
87.5°	32.0	29.0
90°	30.3	30.3
92.5°	121.4	97.3
95°	423.0	350.0
97.5°	1013.6	874.7
100°	1460.4	1294.9
102.5°	1899.9	1758.1
105°	2460.2	2384.1
107.5°	2827.3	2845.7
110°	2967.3	3046.7





TEST NUMBER: P937824

CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	2979.7	3101.6
115°	2900.7	3069.8
117.5°	2733.2	2920.7
120°	2598.2	2780.3
122.5°	2466.8	2646.4
125°	2279.2	2444.7
127.5°	2110.5	2250.1
130°	2011.1	2140.1
132.5°	1920.9	2036.4
135°	1797.3	1896.9
137.5°	1698.2	1779.7
140°	1630.2	1706.3
142.5°	1573.7	1639.3
145°	1489.3	1538.8
147.5°	1424.4	1465.5
150°	1383.6	1416.9
152.5°	1348.7	1373.8
155°	1308.5	1325.2
157.5°	1276.8	1288.5
160°	1257.8	1264.6
162.5°	1245.5	1251.9
165°	1227.5	1234.3
167.5°	1214.7	1217.5
170°	1211.1	1211.1
172.5°	1201.7	1199.2
175°	1196.0	1196.0
177.5°	1190.9	1188.0
180°	1188.0	1188.0



TEST NUMBER: P937824  
 CATALOG NUMBER: SQ4-FB-125U-050D-927-1D-UNV-STD-W-8

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.06	0.52	1.20	2.79	12.56	13.24	13.70	14.38	15.97
	3H	0.07	0.68	1.22	1.83	3.44	14.38	15.00	15.53	16.14	17.75
	4H	0.36	0.94	1.52	2.09	3.70	15.02	15.60	16.18	16.75	18.36
	6H	0.60	1.14	1.77	2.29	3.91	15.44	15.98	16.61	17.13	18.75
	8H	0.66	1.18	1.83	2.34	3.95	15.56	16.07	16.73	17.23	18.85
	12H	0.67	1.16	1.85	2.32	3.96	15.62	16.10	16.79	17.26	18.90
4H	2H	6.57	7.16	7.74	8.30	9.91	12.81	13.39	13.98	14.54	16.15
	3H	8.12	8.61	9.30	9.78	11.41	14.84	15.33	16.01	16.50	18.12
	4H	8.21	8.66	9.39	9.82	11.46	15.60	16.05	16.77	17.21	18.85
	6H	8.21	8.60	9.39	9.78	11.41	16.12	16.51	17.31	17.69	19.33
	8H	8.18	8.54	9.36	9.71	11.37	16.28	16.64	17.46	17.82	19.47
	12H	8.13	8.46	9.33	9.64	11.30	16.37	16.69	17.56	17.88	19.53
8H	4H	9.64	10.00	10.82	11.17	12.82	15.64	16.00	16.82	17.17	18.83
	6H	9.87	10.17	11.07	11.39	13.03	16.26	16.56	17.46	17.78	19.42
	8H	9.89	10.15	11.09	11.34	13.01	16.48	16.74	17.68	17.93	19.60
	12H	9.85	10.08	11.06	11.27	12.96	16.62	16.84	17.82	18.03	19.73
12H	4H	9.77	10.10	10.97	11.28	12.94	15.59	15.91	16.78	17.10	18.75
	6H	10.13	10.39	11.33	11.58	13.25	16.24	16.50	17.45	17.70	19.36
	8H	10.19	10.42	11.40	11.61	13.31	16.46	16.69	17.67	17.88	19.58