

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936821

Luminaire Tested: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936821
REPORT IS A COMBINATION OF REPORTS P933463 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11944.2 lumens
Efficiency: N/A
Efficacy: 88.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 135.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936821
CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

Luminous Intensity Polar Plot

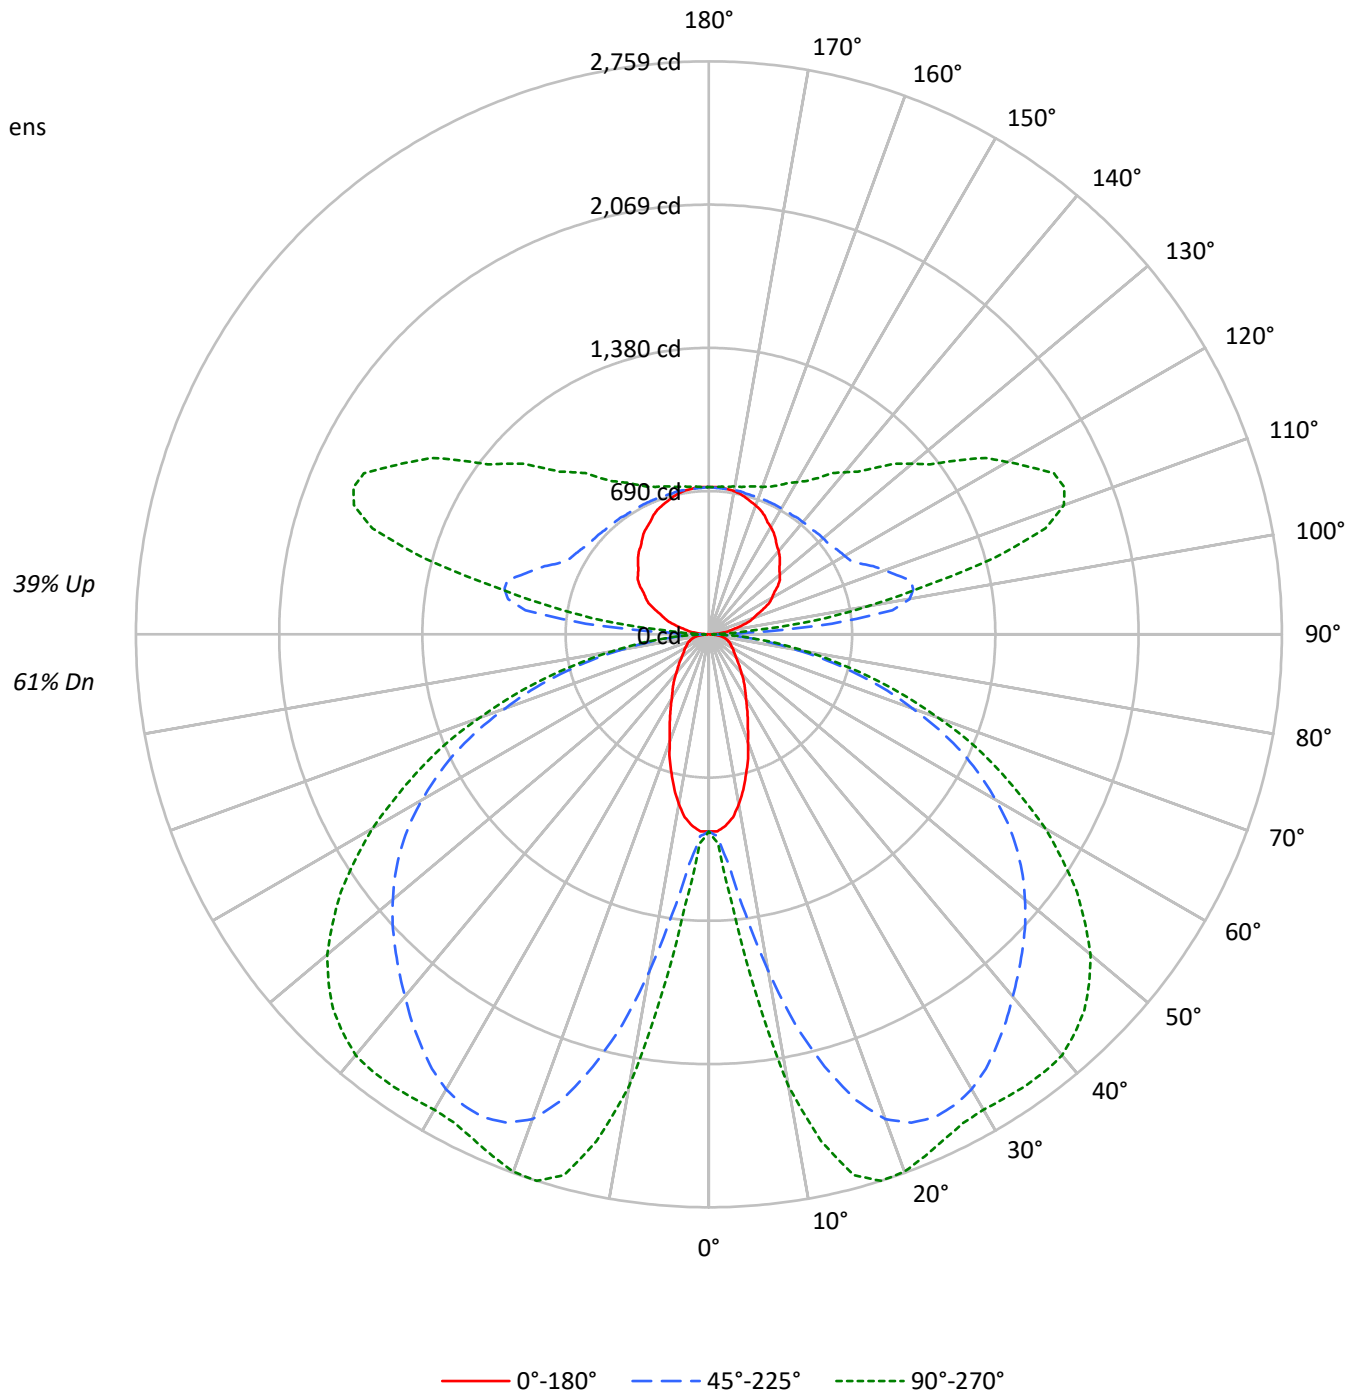



TEST NUMBER: P936821

CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	67	67	67	61
1	100	95	91	87	93	89	85	82	78	75	72	67	65	63	58	56	55	55	55	55	50
2	90	82	75	70	84	77	71	66	67	63	59	58	55	52	50	48	45	45	45	45	41
3	82	72	64	57	76	67	60	54	59	53	49	51	47	43	44	40	38	38	38	38	34
4	74	63	54	48	69	59	51	45	52	46	41	45	40	36	39	35	32	32	32	32	28
5	68	56	47	41	63	52	44	39	46	40	35	40	35	31	34	30	27	27	27	27	24
6	63	50	41	35	58	47	39	33	41	35	30	36	31	27	31	27	23	23	23	23	21
7	58	45	36	30	54	42	34	29	37	31	26	32	27	23	28	24	21	21	21	21	18
8	53	40	32	26	50	38	30	25	34	27	23	29	24	20	25	21	18	18	18	18	16
9	50	37	29	23	46	35	27	22	31	24	20	27	22	18	23	19	16	16	16	16	14
10	46	33	26	21	43	32	25	20	28	22	18	25	20	16	21	17	14	14	14	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2936	2936	2936
5°	2869	3394	3946
10°	2603	4949	6542
15°	2214	6467	7900
20°	1803	7496	8051
25°	1504	7846	7887
30°	1269	7898	7872
35°	1123	7769	8076
40°	979	7600	8286
45°	887	7478	8319
50°	814	7368	8181
55°	781	7206	7819
60°	800	6893	7246
65°	834	6415	6459
70°	890	5598	5457
75°	991	4569	4258
80°	1090	3173	2869
85°	988	1686	1469

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 8319 cd/sqm



TEST NUMBER: P936821

CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.8	1.0
10°-20°	544.2	4.6
20°-30°	951.8	8.0
30°-40°	1225.3	10.3
40°-50°	1368.6	11.5
50°-60°	1310.8	11.0
60°-70°	1038.8	8.7
70°-80°	610.8	5.1
80°-90°	172.4	1.4
90°-100°	345.8	2.9
100°-110°	909.1	7.6
110°-120°	942.7	7.9
120°-130°	756.1	6.3
130°-140°	593.3	5.0
140°-150°	455.4	3.8
150°-160°	328.0	2.7
160°-170°	200.7	1.7
170°-180°	67.8	0.6
0°-30°	1618.8	13.6
0°-40°	2844.0	23.8
0°-60°	5523.4	46.2
0°-90°	7345.4	61.5
90°-120°	2197.6	18.4
90°-150°	4002.4	33.5
90°-180°	4599.0	38.5
0°-180°	11944.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	949	949	949	949	949	
5°	925	992	1117	1264	1309	85
15°	693	1279	2155	2612	2695	193
25°	442	1450	2567	2680	2683	204
35°	299	1386	2417	2554	2655	187
45°	204	1105	2136	2448	2558	158
55°	146	702	1813	2106	2164	133
65°	116	372	1346	1514	1535	115
75°	86	229	739	812	815	89
85°	30	70	183	201	204	32
90°	5	13	36	18	18	6
95°	46	179	596	307	209	51
105°	164	248	1005	1526	1424	174
115°	291	353	805	1606	1833	287
125°	405	454	732	1237	1460	359
135°	482	531	709	999	1133	373
145°	559	595	700	852	919	350
155°	632	650	700	769	791	291
165°	682	691	700	728	737	193
175°	709	709	705	714	714	67
180°	709	709	709	709	709	



TEST NUMBER: P936821
 CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	949.2	949.2	949.2	949.2	949.2	949.2	949.2	949.2	949.2	949.2	949.2
2.5°	949.2	949.2	955.3	958.3	964.4	967.5	973.6	979.7	998.0	1001.1	1007.2
5°	924.8	936.9	976.7	991.9	1034.6	1092.6	1117.0	1156.7	1239.1	1263.5	1278.7
7.5°	888.1	915.6	1013.2	1037.7	1144.5	1297.1	1361.2	1446.6	1577.9	1641.9	1693.8
10°	830.1	888.1	1062.1	1120.0	1294.1	1526.0	1645.0	1764.1	1962.4	2050.9	2084.5
12.5°	766.1	860.6	1114.0	1193.3	1443.6	1782.3	1925.8	2057.1	2282.9	2401.9	2420.2
15°	692.8	821.0	1162.8	1278.7	1602.3	1996.0	2154.7	2316.5	2527.1	2612.5	2633.9
17.5°	628.7	790.5	1208.6	1330.6	1724.3	2188.3	2350.0	2484.3	2655.2	2713.2	2728.5
20°	549.3	741.7	1239.1	1397.8	1852.5	2328.6	2484.3	2588.0	2704.0	2740.7	2746.7
22.5°	491.3	689.8	1257.4	1422.2	1938.0	2414.1	2545.3	2627.8	2707.1	2719.3	2722.3
25°	442.5	631.8	1254.3	1449.7	2011.2	2466.0	2566.7	2627.8	2673.5	2679.6	2679.6
27.5°	396.8	567.6	1242.2	1455.8	2066.2	2478.2	2557.6	2600.3	2621.6	2633.9	2633.9
30°	357.0	506.7	1211.6	1443.6	2090.6	2466.0	2530.1	2551.5	2572.8	2591.1	2600.3
32.5°	326.6	448.6	1165.9	1419.2	2093.6	2435.5	2481.2	2493.5	2524.0	2566.7	2582.0
35°	299.1	390.6	1114.0	1385.6	2075.3	2386.6	2417.2	2429.4	2490.4	2554.5	2575.9
37.5°	271.7	348.0	1046.8	1327.6	2047.9	2328.6	2350.0	2371.4	2466.0	2542.3	2566.7
40°	244.2	311.3	967.5	1263.5	2005.2	2258.5	2276.7	2310.3	2435.5	2524.0	2548.4
42.5°	222.8	280.8	882.0	1196.3	1950.2	2179.1	2206.6	2255.4	2398.9	2493.5	2520.9
45°	204.5	250.2	790.5	1104.8	1880.0	2096.7	2136.4	2203.5	2356.1	2447.7	2472.1
47.5°	186.2	228.9	695.8	1010.2	1803.7	2014.3	2066.2	2142.4	2298.1	2386.6	2408.0
50°	170.9	207.5	601.2	909.5	1721.3	1925.8	1986.8	2066.2	2224.9	2307.3	2334.8
52.5°	158.7	189.2	512.7	808.8	1626.7	1834.2	1904.4	1986.8	2136.4	2215.8	2234.1
55°	146.5	173.9	436.4	701.9	1529.1	1736.6	1812.9	1892.2	2038.7	2105.9	2118.0
57.5°	140.4	161.8	372.4	601.2	1425.3	1626.7	1712.2	1785.4	1922.8	1974.6	1986.8
60°	131.2	152.6	323.5	515.7	1312.3	1522.9	1596.2	1669.4	1785.4	1828.1	1837.3
62.5°	122.0	146.5	286.9	433.4	1196.3	1400.9	1474.1	1541.2	1638.9	1669.4	1681.6
65°	116.0	140.4	259.4	372.4	1077.4	1272.7	1345.9	1403.9	1483.3	1513.7	1519.9
67.5°	109.9	134.3	238.1	320.5	958.3	1144.5	1199.4	1254.3	1315.4	1345.9	1349.0
70°	100.7	128.2	219.8	283.8	836.2	998.0	1043.8	1101.8	1150.6	1165.9	1175.0
72.5°	94.6	119.0	207.5	256.3	711.1	857.6	900.4	933.9	976.7	991.9	991.9
75°	85.5	106.8	195.3	228.9	582.9	701.9	738.6	772.2	805.7	811.8	802.6
77.5°	76.3	94.6	167.9	192.3	454.8	555.5	586.0	604.3	631.8	637.9	640.9
80°	64.1	82.4	131.2	149.5	329.6	408.9	430.4	445.6	470.0	470.0	476.1
82.5°	48.8	64.1	94.6	106.8	222.8	280.8	299.1	308.2	323.5	323.5	323.5
85°	30.5	39.7	61.1	70.2	134.3	170.9	183.1	186.2	198.4	201.4	201.4
87.5°	15.2	21.3	39.7	42.7	70.2	88.5	88.5	94.6	94.6	91.6	88.5
90°	4.8	8.5	12.4	13.3	20.9	31.1	36.2	32.2	24.1	18.1	18.1
92.5°	19.0	51.4	83.8	91.9	129.1	178.9	203.7	178.6	128.2	90.5	86.9
95°	45.7	105.0	164.2	179.0	317.9	503.0	595.6	531.5	403.2	307.1	296.1
97.5°	79.0	131.3	183.6	196.7	428.2	736.9	891.3	850.8	769.7	708.9	688.2
100°	104.7	152.2	199.5	211.4	468.3	810.9	982.2	985.1	991.1	995.5	970.8
102.5°	126.7	170.9	215.1	226.1	486.7	834.2	1007.9	1059.5	1162.8	1240.2	1219.1
105°	163.8	201.2	238.6	248.0	500.3	836.8	1005.1	1120.8	1352.3	1525.9	1514.5
107.5°	201.9	236.8	271.7	280.4	503.0	799.6	947.9	1109.4	1432.4	1674.5	1677.3
110°	227.6	259.1	290.7	298.5	499.1	766.6	900.4	1080.8	1441.8	1712.6	1724.4



TEST NUMBER: P936821

CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	252.8	282.8	312.9	320.4	499.3	737.7	857.0	1041.7	1411.2	1688.3	1706.5
115°	290.9	318.6	346.3	353.3	503.9	704.7	805.1	983.1	1339.0	1605.9	1631.2
117.5°	328.5	353.7	378.8	385.2	513.2	684.0	769.4	930.0	1251.2	1492.1	1520.1
120°	350.4	374.1	397.8	403.7	520.8	677.1	755.1	901.9	1195.3	1415.5	1442.7
122.5°	371.8	395.8	419.6	425.7	531.8	673.4	744.1	876.3	1140.6	1338.8	1365.6
125°	404.7	426.5	448.3	453.8	546.6	670.4	732.3	844.5	1069.0	1237.4	1262.1
127.5°	431.4	453.4	475.4	480.9	561.3	668.6	722.3	818.7	1011.4	1156.0	1176.9
130°	445.7	469.4	493.0	499.0	572.1	669.7	718.5	804.3	975.9	1104.6	1123.8
132.5°	460.4	484.1	507.8	513.7	580.9	670.4	715.1	791.9	945.6	1060.8	1078.0
135°	482.3	503.9	525.4	530.8	590.4	669.7	709.4	773.8	902.4	998.9	1013.8
137.5°	504.7	526.1	547.5	552.8	604.7	673.9	708.5	762.8	871.6	953.2	965.3
140°	523.2	542.9	562.6	567.5	613.4	674.5	705.1	752.1	846.1	916.5	927.9
142.5°	537.5	555.7	574.0	578.5	620.7	677.0	705.1	746.4	828.9	890.8	900.6
145°	559.4	575.3	591.1	595.1	630.2	677.0	700.4	734.1	801.6	852.2	859.6
147.5°	581.4	596.8	612.2	616.1	644.2	681.7	700.4	727.0	780.1	819.9	826.1
150°	595.6	609.5	623.5	627.0	651.5	684.1	700.4	722.8	767.6	801.3	806.3
152.5°	610.4	620.9	631.6	634.2	656.3	685.7	700.4	719.6	757.8	786.6	790.3
155°	632.2	640.1	648.0	649.9	666.7	689.2	700.4	715.6	746.1	768.9	771.4
157.5°	648.5	656.1	663.7	665.6	677.2	692.7	700.4	712.2	735.9	753.7	755.4
160°	659.4	665.4	671.3	672.7	682.0	694.2	700.4	710.6	730.8	746.1	747.1
162.5°	670.4	674.8	679.3	680.4	687.1	695.9	700.4	708.9	726.0	738.9	739.8
165°	682.3	686.3	690.3	691.3	694.3	698.4	700.4	706.6	718.8	728.0	729.0
167.5°	693.2	695.1	697.0	697.5	700.0	703.4	705.1	709.1	717.2	723.2	723.6
170°	700.4	702.2	704.2	704.6	704.8	705.0	705.1	709.1	717.2	723.2	723.2
172.5°	704.2	704.6	705.0	705.1	705.1	705.1	705.1	708.2	714.6	719.4	719.0
175°	709.4	709.4	709.4	709.4	707.9	706.0	705.1	707.1	711.2	714.2	714.2
177.5°	709.4	709.4	709.4	709.4	708.3	706.9	706.1	707.7	710.9	713.3	712.8
180°	709.4	709.4	709.4	709.4	709.4	709.4	709.4	709.4	709.4	709.4	709.4



TEST NUMBER: P936821

CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	949.2	949.2
2.5°	1013.2	1007.2
5°	1303.2	1309.3
7.5°	1754.9	1751.8
10°	2182.2	2209.6
12.5°	2493.5	2499.6
15°	2682.7	2694.9
17.5°	2755.9	2759.0
20°	2759.0	2752.9
22.5°	2725.4	2719.3
25°	2685.8	2682.7
27.5°	2649.1	2652.2
30°	2633.9	2643.0
32.5°	2633.9	2649.1
35°	2639.9	2655.2
37.5°	2636.9	2655.2
40°	2624.7	2646.0
42.5°	2591.1	2606.4
45°	2539.2	2557.6
47.5°	2472.1	2484.3
50°	2386.6	2398.9
52.5°	2279.8	2282.9
55°	2151.6	2163.9
57.5°	2014.3	2017.3
60°	1861.7	1870.9
62.5°	1699.9	1699.9
65°	1529.1	1535.1
67.5°	1352.0	1367.3
70°	1171.9	1175.0
72.5°	994.9	994.9
75°	811.8	814.9
77.5°	637.9	637.9
80°	473.1	476.1
82.5°	326.6	332.6
85°	204.5	204.5
87.5°	94.6	85.5
90°	18.1	18.1
92.5°	72.5	58.1
95°	252.6	209.0
97.5°	605.2	522.3
100°	872.0	773.2
102.5°	1134.4	1049.8
105°	1469.1	1423.6
107.5°	1688.2	1699.2
110°	1771.8	1819.2



TEST NUMBER: P936821

CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1779.3	1852.1
115°	1732.1	1833.1
117.5°	1632.0	1744.0
120°	1551.5	1660.2
122.5°	1472.9	1580.2
125°	1360.9	1459.8
127.5°	1260.2	1343.6
130°	1200.9	1277.9
132.5°	1147.0	1216.0
135°	1073.2	1132.7
137.5°	1014.0	1062.7
140°	973.4	1018.9
142.5°	939.8	978.9
145°	889.3	918.9
147.5°	850.5	875.1
150°	826.1	846.1
152.5°	805.3	820.4
155°	781.4	791.3
157.5°	762.4	769.4
160°	751.1	755.1
162.5°	743.7	747.5
165°	733.0	737.0
167.5°	725.3	727.0
170°	723.2	723.2
172.5°	717.6	716.1
175°	714.2	714.2
177.5°	711.1	709.4
180°	709.4	709.4



TEST NUMBER: P936821
 CATALOG NUMBER: SQ4-FB-050U-100D-927-1D-UNV-STD-W-12

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.74	6.76	6.58	7.63	8.73	18.93	19.95	19.77	20.82	21.92
	3H	6.45	7.38	7.31	8.26	9.38	20.78	21.71	21.64	22.59	23.71
	4H	6.76	7.63	7.63	8.52	9.65	21.44	22.31	22.31	23.20	24.33
	6H	7.02	7.83	7.90	8.72	9.86	21.88	22.69	22.77	23.59	24.73
	8H	7.09	7.86	7.98	8.77	9.92	22.01	22.78	22.90	23.69	24.84
	12H	7.11	7.85	8.01	8.75	9.92	22.09	22.82	22.99	23.73	24.90
4H	2H	12.98	13.85	13.85	14.74	15.87	19.22	20.09	20.10	20.98	22.11
	3H	14.56	15.29	15.45	16.21	17.36	21.29	22.02	22.17	22.94	24.08
	4H	14.66	15.33	15.56	16.25	17.42	22.06	22.73	22.96	23.65	24.82
	6H	14.68	15.26	15.60	16.20	17.37	22.62	23.20	23.53	24.14	25.31
	8H	14.66	15.21	15.58	16.14	17.33	22.79	23.33	23.70	24.26	25.45
	12H	14.63	15.12	15.57	16.07	17.26	22.89	23.38	23.83	24.33	25.53
8H	4H	16.12	16.67	17.04	17.60	18.79	22.14	22.68	23.06	23.61	24.80
	6H	16.37	16.82	17.32	17.80	18.99	22.78	23.23	23.72	24.20	25.39
	8H	16.39	16.79	17.35	17.76	18.96	23.00	23.40	23.96	24.37	25.57
	12H	16.37	16.72	17.33	17.68	18.93	23.16	23.51	24.12	24.47	25.72
12H	4H	16.28	16.77	17.22	17.72	18.91	22.10	22.59	23.04	23.54	24.73
	6H	16.64	17.04	17.59	18.00	19.20	22.76	23.16	23.72	24.13	25.33
	8H	16.71	17.07	17.67	18.02	19.28	23.01	23.36	23.96	24.32	25.57