

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: CORELITE

Report Number: P519739

Luminaire Tested: **SQ4-125U-0D-830-1D-UNV-STD-W-12**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519739
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-24)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-125U-0D-830-1D-UNV-STD-W-12
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14156.5 lumens
Efficiency: N/A
Efficacy: 152.2 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 12' x H: 0')
CIE Type: Indirect

Input Watts (W): 93
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519739
CATALOG NUMBER: SQ4-125U-0D-830-1D-UNV-STD-W-12

Luminous Intensity Polar Plot

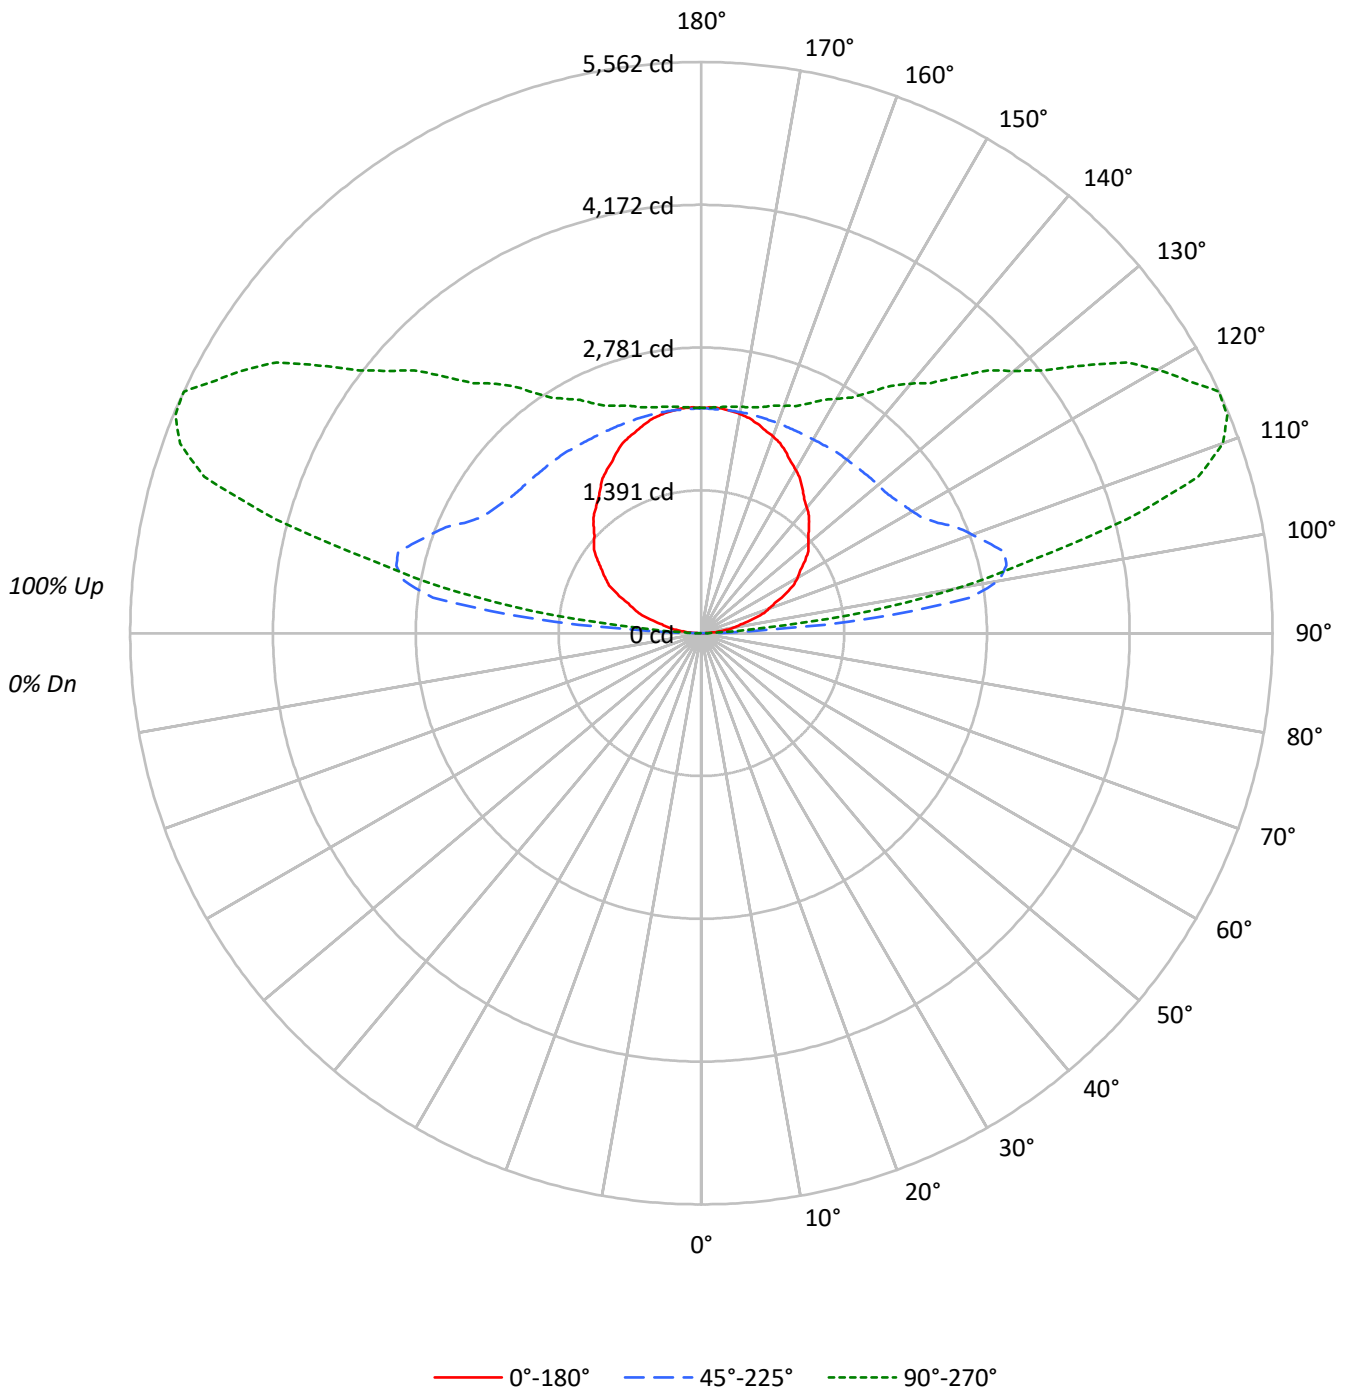



TEST NUMBER: P519739

CATALOG NUMBER: SQ4-125U-0D-830-1D-UNV-STD-W-12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20			
RC	80								50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0		
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0		
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0		
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0		
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0		
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0		
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0		
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0		
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0		
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0		
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	5519	59341	20995
100°	5690	52097	45220
105°	6074	36314	50985
110°	6305	25245	48579
115°	6566	18519	40474
120°	6667	14588	31564
125°	6605	12252	24369
130°	6522	10746	18992
135°	6452	9659	15345
140°	6415	8860	12740
145°	6439	8233	10740
150°	6527	7738	9355
155°	6607	7375	8370
160°	6674	7122	7707
165°	6724	6946	7258
170°	6770	6822	6988
175°	6778	6744	6822



TEST NUMBER: P519739

CATALOG NUMBER: SQ4-125U-0D-830-1D-UNV-STD-W-12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	1025.9	7.2
100°-110°	2763.4	19.5
110°-120°	2900.1	20.5
120°-130°	2353.3	16.6
130°-140°	1845.6	13.0
140°-150°	1417.0	10.0
150°-160°	1018.8	7.2
160°-170°	622.4	4.4
170°-180°	209.9	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	6689.3	47.3
90°-150°	12305.3	86.9
90°-180°	14156.0	100.0
0°-180°	14156.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	6	16	34	36	36	
95°	156	558	1682	860	595	174
105°	511	795	3056	4572	4291	537
115°	902	1104	2545	4917	5562	888
125°	1232	1415	2285	3862	4545	1100
135°	1483	1655	2221	3116	3528	1145
145°	1715	1849	2193	2664	2861	1076
155°	1947	2018	2173	2390	2467	896
165°	2112	2136	2182	2269	2280	596
175°	2196	2193	2184	2215	2210	209
180°	2193	2193	2193	2193	2193	



TEST NUMBER: P519739

CATALOG NUMBER: SQ4-125U-0D-830-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	5.6	16.5	33.5	36.3	36.3
92.5°	68.2	240.8	476.0	229.2	159.2
95°	156.4	558.0	1681.7	860.0	595.0
97.5°	249.7	638.7	2637.6	2203.5	1661.6
100°	321.3	670.9	2941.6	3077.7	2553.3
102.5°	390.5	716.1	3042.1	3732.4	3301.9
105°	511.2	795.3	3056.1	4572.2	4290.8
107.5°	625.2	878.7	2925.9	5003.7	5076.4
110°	701.2	941.5	2807.5	5137.7	5402.6
112.5°	781.6	1004.5	2693.5	5108.0	5543.4
115°	902.3	1104.4	2544.9	4917.3	5561.9
117.5°	1012.4	1201.9	2429.8	4612.7	5330.6
120°	1083.9	1266.9	2371.7	4394.2	5131.7
122.5°	1146.5	1327.3	2329.2	4170.7	4906.0
125°	1231.9	1414.9	2285.1	3862.2	4545.0
127.5°	1314.1	1494.3	2257.2	3590.1	4199.8
130°	1363.2	1543.5	2246.0	3434.2	3969.6
132.5°	1412.4	1590.5	2234.8	3296.9	3788.6
135°	1483.4	1655.4	2220.8	3115.8	3528.2
137.5°	1551.0	1715.9	2213.6	2962.1	3300.8
140°	1597.9	1756.3	2206.9	2867.5	3173.4
142.5°	1647.1	1794.5	2202.4	2779.3	3037.1
145°	1715.2	1849.1	2192.9	2663.9	2860.6
147.5°	1789.0	1905.3	2183.4	2566.8	2721.4
150°	1838.1	1939.2	2178.9	2505.9	2634.3
152.5°	1882.8	1970.8	2176.7	2456.2	2560.5
155°	1947.1	2018.1	2173.3	2390.2	2466.7
157.5°	2003.5	2058.7	2173.9	2343.8	2395.2
160°	2039.3	2085.7	2176.1	2316.7	2354.9
162.5°	2070.5	2108.2	2178.4	2294.1	2321.4
165°	2111.9	2136.5	2181.7	2268.6	2279.5
167.5°	2145.4	2159.6	2184.5	2248.9	2253.2
170°	2167.8	2173.2	2184.5	2237.6	2237.6
172.5°	2181.2	2182.3	2186.8	2226.4	2226.4
175°	2195.7	2193.0	2184.5	2215.1	2209.7
177.5°	2201.8	2197.5	2186.2	2204.0	2199.6
180°	2192.9	2192.9	2192.9	2192.9	2192.9

(END OF REPORT)