

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936309

Luminaire Tested: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936309  
REPORT IS A COMBINATION OF REPORTS P933430 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9676.6 lumens  
Efficiency: N/A  
Efficacy: 107.5 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 90  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936309  
CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

### Luminous Intensity Polar Plot

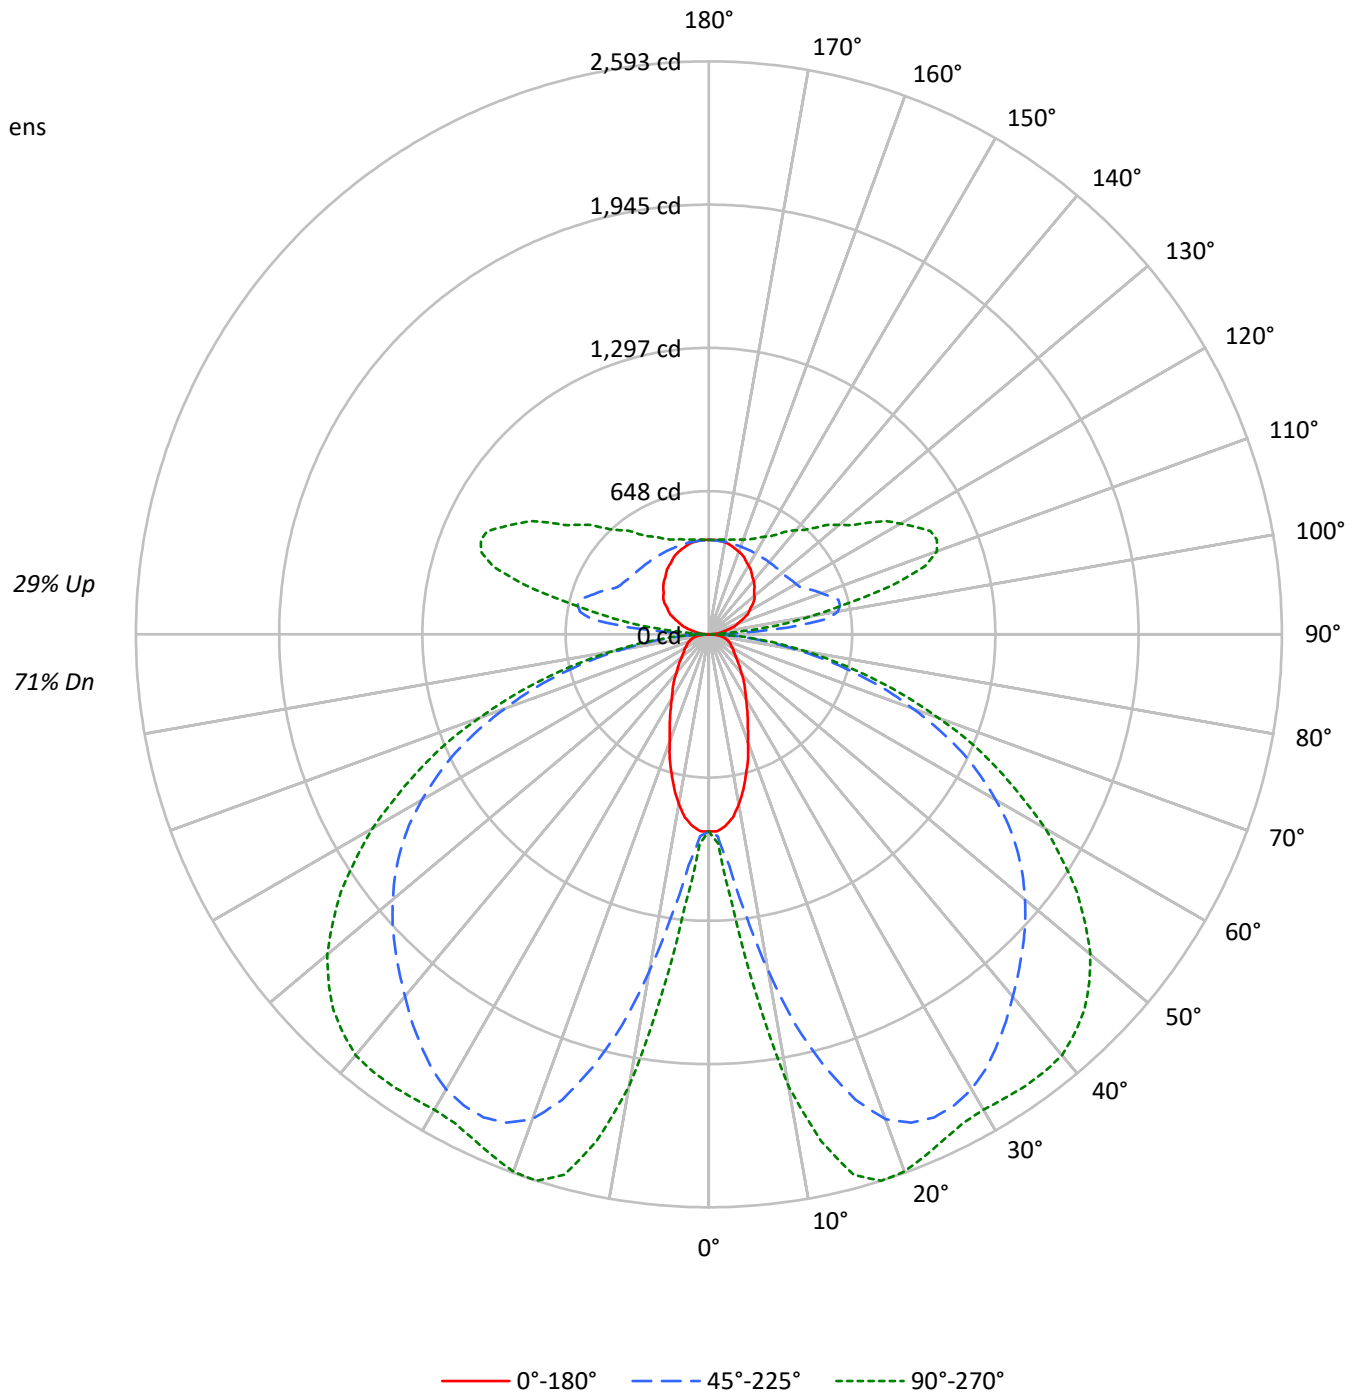



TEST NUMBER: P936309

CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	71
1	102	97	93	89	96	92	88	85	82	79	77	74	71	69	66	64	62	58
2	92	84	77	71	87	79	73	68	71	66	62	64	60	57	57	54	51	48
3	83	73	65	58	79	69	62	56	62	56	51	56	51	47	50	46	43	39
4	76	64	55	49	71	61	53	47	55	48	43	49	44	39	44	40	36	33
5	69	57	48	41	65	54	46	40	49	42	37	44	38	34	39	34	31	28
6	64	51	42	35	60	48	40	34	43	37	32	39	33	29	35	30	27	24
7	59	45	37	31	55	43	35	30	39	32	27	35	30	25	32	27	23	21
8	54	41	33	27	51	39	31	26	36	29	24	32	26	22	29	24	21	18
9	51	37	29	24	48	36	28	23	32	26	21	29	24	20	26	22	18	16
10	47	34	26	21	45	33	25	21	30	23	19	27	22	18	24	20	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2759	2759	2759
5°	2696	3190	3709
10°	2447	4651	6148
15°	2080	6077	7424
20°	1694	7044	7566
25°	1414	7373	7412
30°	1193	7422	7398
35°	1055	7301	7590
40°	920	7142	7787
45°	834	7027	7818
50°	765	6924	7688
55°	734	6772	7348
60°	752	6478	6809
65°	784	6029	6070
70°	836	5261	5128
75°	931	4294	4002
80°	1024	2981	2696
85°	930	1585	1380

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 7818 cd/sqm



TEST NUMBER: P936309

CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	115.4	1.2
10°-20°	511.4	5.3
20°-30°	894.5	9.2
30°-40°	1151.5	11.9
40°-50°	1286.1	13.3
50°-60°	1231.8	12.7
60°-70°	976.2	10.1
70°-80°	574.0	5.9
80°-90°	161.1	1.7
90°-100°	208.6	2.2
100°-110°	548.5	5.7
110°-120°	568.7	5.9
120°-130°	456.2	4.7
130°-140°	358.0	3.7
140°-150°	274.7	2.8
150°-160°	197.9	2.0
160°-170°	121.1	1.3
170°-180°	40.9	0.4
0°-30°	1521.2	15.7
0°-40°	2672.7	27.6
0°-60°	5190.7	53.6
0°-90°	6902.0	71.3
90°-120°	1325.9	13.7
90°-150°	2414.8	25.0
90°-180°	2775.0	28.7
0°-180°	9676.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	892	892	892	892	892	
5°	869	932	1050	1187	1230	80
15°	651	1202	2025	2455	2532	181
25°	416	1362	2412	2518	2521	192
35°	281	1302	2272	2401	2495	176
45°	192	1038	2008	2300	2404	149
55°	138	660	1704	1979	2034	125
65°	109	350	1265	1423	1443	108
75°	80	215	694	763	766	84
85°	29	66	172	189	192	30
90°	3	8	22	11	11	4
95°	28	108	359	185	126	31
105°	99	150	606	921	859	105
115°	176	213	486	969	1106	173
125°	244	274	442	746	881	217
135°	291	320	428	603	683	225
145°	338	359	423	514	554	211
155°	381	392	423	464	477	175
165°	412	417	423	439	445	116
175°	428	428	425	431	431	41
180°	428	428	428	428	428	



TEST NUMBER: P936309

CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	891.9	891.9	891.9	891.9	891.9	891.9	891.9	891.9	891.9	891.9	891.9
2.5°	891.9	891.9	897.7	900.6	906.3	909.2	914.9	920.6	937.8	940.7	946.4
5°	869.0	880.5	917.8	932.1	972.3	1026.7	1049.7	1087.1	1164.5	1187.4	1201.8
7.5°	834.6	860.4	952.2	975.1	1075.5	1219.0	1279.2	1359.5	1482.9	1543.1	1591.8
10°	780.1	834.6	998.1	1052.6	1216.1	1434.1	1545.9	1657.8	1844.2	1927.4	1958.9
12.5°	719.9	808.8	1046.8	1121.5	1356.7	1675.0	1809.8	1933.1	2145.4	2257.2	2274.4
15°	651.0	771.5	1092.8	1201.8	1505.8	1875.8	2024.9	2176.9	2374.8	2455.1	2475.2
17.5°	590.8	742.8	1135.8	1250.5	1620.5	2056.5	2208.5	2334.6	2495.3	2549.7	2564.1
20°	516.2	696.9	1164.5	1313.6	1741.0	2188.4	2334.6	2432.2	2541.1	2575.6	2581.3
22.5°	461.7	648.2	1181.7	1336.6	1821.3	2268.7	2392.0	2469.4	2544.0	2555.5	2558.4
25°	415.9	593.7	1178.8	1362.4	1890.1	2317.4	2412.1	2469.4	2512.5	2518.2	2518.2
27.5°	372.8	533.4	1167.4	1368.1	1941.7	2328.9	2403.5	2443.6	2463.7	2475.2	2475.2
30°	335.6	476.1	1138.7	1356.7	1964.7	2317.4	2377.7	2397.7	2417.8	2435.0	2443.6
32.5°	306.9	421.6	1095.7	1333.7	1967.5	2288.8	2331.8	2343.3	2371.9	2412.1	2426.4
35°	281.1	367.1	1046.8	1302.2	1950.3	2242.9	2271.6	2283.0	2340.4	2400.6	2420.7
37.5°	255.3	327.0	983.7	1247.7	1924.5	2188.4	2208.5	2228.5	2317.4	2389.1	2412.1
40°	229.4	292.5	909.2	1187.4	1884.4	2122.4	2139.6	2171.2	2288.8	2371.9	2394.9
42.5°	209.4	263.9	828.9	1124.4	1832.7	2047.8	2073.7	2119.5	2254.3	2343.3	2369.1
45°	192.2	235.2	742.8	1038.2	1766.8	1970.4	2007.7	2070.8	2214.2	2300.2	2323.2
47.5°	174.9	215.1	653.9	949.3	1695.1	1893.0	1941.7	2013.4	2159.7	2242.9	2262.9
50°	160.6	195.0	565.0	854.7	1617.6	1809.8	1867.2	1941.7	2090.9	2168.3	2194.1
52.5°	149.1	177.8	481.8	760.0	1528.7	1723.8	1789.7	1867.2	2007.7	2082.3	2099.5
55°	137.7	163.5	410.1	659.6	1437.0	1632.0	1703.7	1778.3	1915.9	1979.0	1990.5
57.5°	131.9	152.0	349.9	565.0	1339.5	1528.7	1609.0	1677.9	1806.9	1855.7	1867.2
60°	123.3	143.4	304.0	484.7	1233.3	1431.2	1500.1	1568.9	1677.9	1718.0	1726.6
62.5°	114.7	137.7	269.6	407.3	1124.4	1316.5	1385.3	1448.4	1540.2	1568.9	1580.4
65°	109.0	131.9	243.8	349.9	1012.4	1196.1	1264.9	1319.4	1393.9	1422.6	1428.4
67.5°	103.2	126.2	223.7	301.1	900.6	1075.5	1127.2	1178.8	1236.2	1264.9	1267.8
70°	94.6	120.5	206.5	266.7	785.8	937.8	980.9	1035.3	1081.2	1095.7	1104.3
72.5°	88.9	111.9	195.0	240.9	668.2	805.9	846.1	877.6	917.8	932.1	932.1
75°	80.3	100.4	183.6	215.1	547.8	659.6	694.1	725.6	757.2	762.9	754.3
77.5°	71.7	88.9	157.7	180.7	427.3	522.0	550.7	567.9	593.7	599.4	602.3
80°	60.2	77.4	123.3	140.5	309.7	384.3	404.4	418.7	441.7	441.7	447.4
82.5°	45.9	60.2	88.9	100.4	209.4	263.9	281.1	289.7	304.0	304.0	304.0
85°	28.7	37.3	57.4	66.0	126.2	160.6	172.1	174.9	186.4	189.3	189.3
87.5°	14.3	20.1	37.3	40.2	66.0	83.2	83.2	88.9	88.9	86.0	83.2
90°	2.9	5.2	7.5	8.0	12.6	18.7	21.8	19.4	14.5	10.9	10.9
92.5°	11.5	31.0	50.6	55.4	77.9	107.9	122.9	107.7	77.3	54.6	52.4
95°	27.5	63.3	99.0	108.0	191.8	303.5	359.4	320.6	243.3	185.3	178.7
97.5°	47.7	79.3	110.8	118.6	258.3	444.6	537.8	513.3	464.4	427.7	415.2
100°	63.2	91.8	120.4	127.5	282.6	489.3	592.6	594.4	598.0	600.7	585.7
102.5°	76.4	103.1	129.7	136.4	293.7	503.3	608.1	639.3	701.5	748.3	735.5
105°	98.9	121.4	144.0	149.6	301.9	504.9	606.4	676.2	815.9	920.6	913.7
107.5°	121.8	142.8	164.0	169.2	303.4	482.4	571.9	669.3	864.1	1010.3	1011.9
110°	137.3	156.3	175.3	180.1	301.1	462.5	543.2	652.1	869.9	1033.2	1040.4



TEST NUMBER: P936309

CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	152.6	170.6	188.8	193.3	301.2	445.1	517.1	628.6	851.4	1018.6	1029.6
115°	175.5	192.3	209.0	213.2	304.0	425.1	485.7	593.1	807.8	968.9	984.1
117.5°	198.2	213.4	228.6	232.4	309.6	412.7	464.2	561.2	755.0	900.3	917.2
120°	211.4	225.7	240.1	243.6	314.2	408.4	455.5	544.1	721.2	854.0	870.4
122.5°	224.4	238.8	253.1	256.8	320.8	406.2	448.9	528.7	688.1	807.7	823.9
125°	244.2	257.4	270.5	273.8	329.8	404.5	441.8	509.5	644.9	746.5	761.5
127.5°	260.2	273.5	286.8	290.1	338.7	403.4	435.7	493.9	610.2	697.4	710.0
130°	268.8	283.2	297.5	301.0	345.2	404.0	433.5	485.3	588.8	666.4	678.1
132.5°	277.8	292.1	306.4	309.9	350.5	404.5	431.4	477.8	570.5	640.0	650.5
135°	291.0	304.0	317.0	320.3	356.2	404.1	428.0	466.8	544.4	602.7	611.6
137.5°	304.5	317.4	330.2	333.5	364.8	406.6	427.4	460.2	525.8	575.0	582.4
140°	315.7	327.5	339.5	342.4	370.1	407.0	425.4	453.7	510.4	553.0	559.8
142.5°	324.3	335.3	346.3	349.0	374.5	408.4	425.4	450.3	500.1	537.5	543.4
145°	337.6	347.1	356.7	359.1	380.2	408.4	422.6	442.9	483.6	514.1	518.6
147.5°	350.8	360.0	369.4	371.7	388.6	411.3	422.6	438.6	470.6	494.6	498.4
150°	359.4	367.8	376.2	378.3	393.0	412.7	422.6	436.1	463.2	483.4	486.4
152.5°	368.3	374.7	381.0	382.6	395.9	413.7	422.6	434.1	457.3	474.6	476.9
155°	381.4	386.1	390.9	392.1	402.2	415.8	422.6	431.7	450.2	463.9	465.5
157.5°	391.2	395.8	400.5	401.6	408.6	417.9	422.6	429.7	444.0	454.7	455.7
160°	397.9	401.4	405.1	405.9	411.5	418.8	422.6	428.7	440.9	450.1	450.7
162.5°	404.5	407.2	409.8	410.5	414.5	419.9	422.6	427.7	438.0	445.8	446.4
165°	411.7	414.0	416.5	417.1	418.9	421.3	422.6	426.3	433.6	439.2	439.8
167.5°	418.2	419.4	420.5	420.8	422.4	424.4	425.4	427.8	432.7	436.3	436.6
170°	422.6	423.7	424.8	425.1	425.2	425.3	425.4	427.8	432.7	436.3	436.3
172.5°	424.8	425.1	425.3	425.4	425.4	425.4	425.4	427.3	431.2	434.0	433.8
175°	428.0	428.0	428.0	428.0	427.1	426.0	425.4	426.7	429.1	430.9	430.9
177.5°	428.0	428.0	428.0	428.0	427.3	426.5	426.0	426.9	428.9	430.3	430.0
180°	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0



TEST NUMBER: P936309

CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	891.9	891.9
2.5°	952.2	946.4
5°	1224.7	1230.5
7.5°	1649.2	1646.3
10°	2050.7	2076.5
12.5°	2343.3	2349.0
15°	2521.1	2532.5
17.5°	2589.9	2592.8
20°	2592.8	2587.0
22.5°	2561.2	2555.5
25°	2523.9	2521.1
27.5°	2489.5	2492.4
30°	2475.2	2483.8
32.5°	2475.2	2489.5
35°	2480.9	2495.3
37.5°	2478.0	2495.3
40°	2466.6	2486.7
42.5°	2435.0	2449.4
45°	2386.3	2403.5
47.5°	2323.2	2334.6
50°	2242.9	2254.3
52.5°	2142.5	2145.4
55°	2022.0	2033.5
57.5°	1893.0	1895.8
60°	1749.6	1758.2
62.5°	1597.6	1597.6
65°	1437.0	1442.7
67.5°	1270.6	1285.0
70°	1101.4	1104.3
72.5°	935.0	935.0
75°	762.9	765.8
77.5°	599.4	599.4
80°	444.5	447.4
82.5°	306.9	312.6
85°	192.2	192.2
87.5°	88.9	80.3
90°	10.9	10.9
92.5°	43.8	35.1
95°	152.4	126.1
97.5°	365.2	315.1
100°	526.2	466.5
102.5°	684.4	633.4
105°	886.3	858.9
107.5°	1018.6	1025.2
110°	1069.0	1097.6





TEST NUMBER: P936309

CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	1073.5	1117.4
115°	1045.0	1105.9
117.5°	984.7	1052.2
120°	936.0	1001.6
122.5°	888.7	953.4
125°	821.0	880.7
127.5°	760.3	810.6
130°	724.6	771.0
132.5°	692.0	733.6
135°	647.5	683.3
137.5°	611.7	641.2
140°	587.3	614.7
142.5°	567.0	590.6
145°	536.5	554.4
147.5°	513.2	528.0
150°	498.5	510.4
152.5°	485.8	494.9
155°	471.4	477.4
157.5°	460.0	464.2
160°	453.1	455.5
162.5°	448.7	450.9
165°	442.2	444.6
167.5°	437.6	438.6
170°	436.3	436.3
172.5°	432.9	432.0
175°	430.9	430.9
177.5°	429.1	428.0
180°	428.0	428.0



TEST NUMBER: P936309  
 CATALOG NUMBER: SQ4-FB-025U-075D-830-1D-UNV-STD-W-12

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.28	7.43	7.02	8.20	9.13	19.47	20.62	20.21	21.39	22.32
	3H	7.00	8.04	7.76	8.82	9.78	21.33	22.38	22.09	23.15	24.11
	4H	7.31	8.30	8.09	9.09	10.06	22.00	22.98	22.77	23.77	24.74
	6H	7.58	8.49	8.37	9.29	10.27	22.45	23.36	23.23	24.15	25.14
	8H	7.66	8.53	8.45	9.34	10.33	22.58	23.45	23.37	24.26	25.25
	12H	7.68	8.51	8.49	9.32	10.34	22.66	23.49	23.46	24.30	25.31
4H	2H	13.53	14.52	14.31	15.31	16.28	19.78	20.76	20.55	21.55	22.52
	3H	15.13	15.95	15.92	16.78	17.76	21.85	22.68	22.64	23.50	24.49
	4H	15.23	15.99	16.04	16.81	17.82	22.64	23.39	23.44	24.21	25.23
	6H	15.26	15.92	16.08	16.76	17.78	23.20	23.85	24.02	24.70	25.72
	8H	15.25	15.86	16.07	16.70	17.73	23.37	23.98	24.20	24.83	25.86
	12H	15.22	15.77	16.06	16.63	17.67	23.48	24.03	24.33	24.90	25.94
8H	4H	16.71	17.32	17.53	18.16	19.20	22.72	23.33	23.55	24.18	25.21
	6H	16.96	17.47	17.82	18.36	19.39	23.37	23.88	24.22	24.76	25.80
	8H	16.99	17.44	17.85	18.32	19.37	23.60	24.05	24.46	24.93	25.98
	12H	16.97	17.37	17.84	18.24	19.34	23.76	24.16	24.63	25.03	26.13
12H	4H	16.87	17.42	17.71	18.28	19.32	22.69	23.24	23.54	24.11	25.14
	6H	17.23	17.68	18.09	18.56	19.61	23.36	23.81	24.22	24.69	25.74
	8H	17.31	17.71	18.18	18.58	19.69	23.60	24.00	24.47	24.87	25.98