

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936409

Luminaire Tested: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936409  
REPORT IS A COMBINATION OF REPORTS P933431 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11892.6 lumens  
Efficiency: N/A  
Efficacy: 102.2 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 116.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936409  
CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

### Luminous Intensity Polar Plot

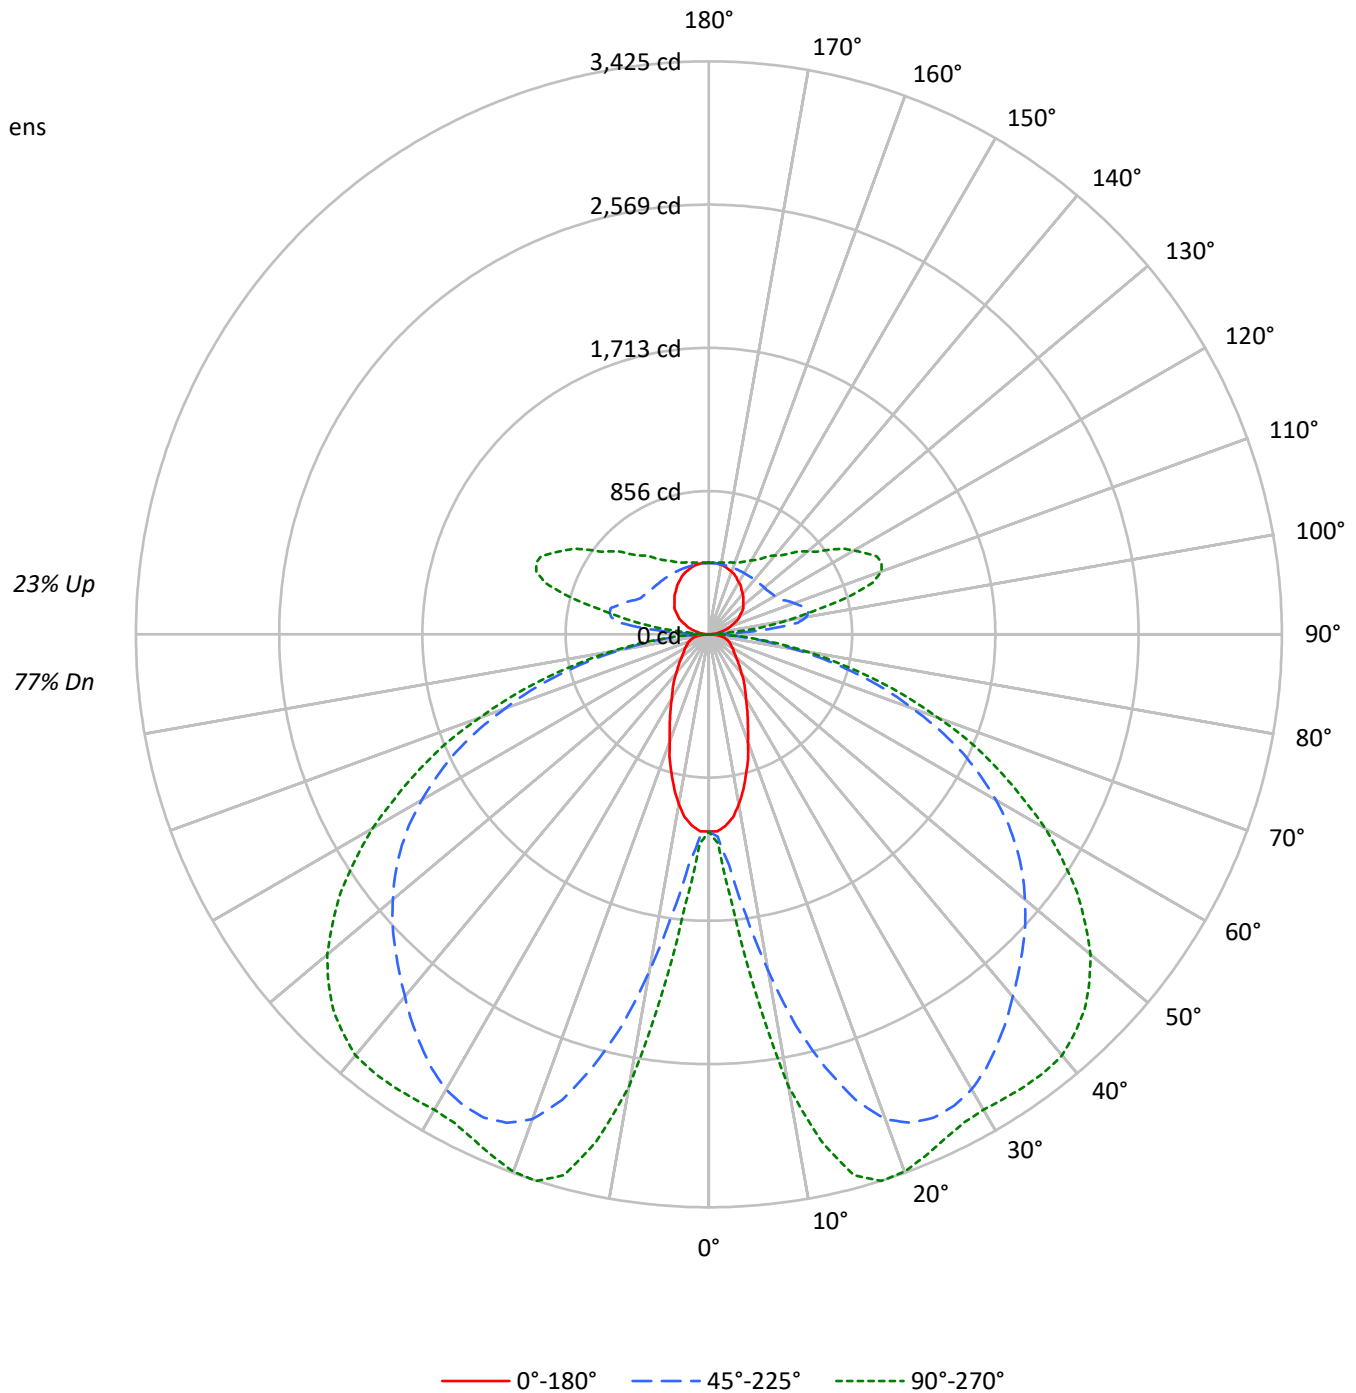



TEST NUMBER: P936409

CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	81	81	81	77				77
1	103	98	94	90	98	94	90	86	85	82	79	77	75	73	70	68	66	63				63
2	93	85	78	72	88	81	75	69	73	68	64	67	63	59	61	57	55	51				51
3	84	74	65	59	80	70	63	57	64	58	53	58	53	49	53	49	45	42				42
4	77	65	56	49	73	62	54	47	56	50	44	51	46	41	47	42	38	35				35
5	70	57	48	42	66	55	46	40	50	43	38	46	40	35	41	37	33	30				30
6	64	51	42	36	61	49	41	35	45	38	32	41	35	30	37	32	28	26				26
7	59	46	37	31	56	44	36	30	40	33	28	37	31	27	34	29	25	22				22
8	55	42	33	27	52	40	32	26	37	30	25	34	28	23	31	26	22	20				20
9	51	38	30	24	49	36	29	23	33	27	22	31	25	21	28	23	19	17				17
10	48	35	27	21	45	33	26	21	31	24	20	28	23	19	26	21	17	16				16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3645	3645	3645
5°	3562	4214	4900
10°	3232	6144	8122
15°	2748	8029	9808
20°	2238	9307	9996
25°	1868	9741	9793
30°	1576	9805	9774
35°	1394	9645	10027
40°	1215	9436	10288
45°	1101	9284	10329
50°	1011	9148	10157
55°	969	8947	9707
60°	993	8558	8996
65°	1035	7965	8019
70°	1105	6951	6775
75°	1230	5672	5287
80°	1352	3939	3562
85°	1228	2093	1824

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 10329 cd/sqm



TEST NUMBER: P936409

CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	152.4	1.3
10°-20°	675.6	5.7
20°-30°	1181.7	9.9
30°-40°	1521.2	12.8
40°-50°	1699.2	14.3
50°-60°	1627.4	13.7
60°-70°	1289.7	10.8
70°-80°	758.4	6.4
80°-90°	212.3	1.8
90°-100°	208.6	1.8
100°-110°	548.5	4.6
110°-120°	568.7	4.8
120°-130°	456.2	3.8
130°-140°	358.0	3.0
140°-150°	274.7	2.3
150°-160°	197.9	1.7
160°-170°	121.1	1.0
170°-180°	40.9	0.3
0°-30°	2009.8	16.9
0°-40°	3531.0	29.7
0°-60°	6857.6	57.7
0°-90°	9118.0	76.7
90°-120°	1325.9	11.1
90°-150°	2414.8	20.3
90°-180°	2775.0	23.3
0°-180°	11892.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1178	1178	1178	1178	1178	
5°	1148	1232	1387	1569	1626	106
15°	860	1588	2675	3244	3346	239
25°	549	1800	3187	3327	3331	253
35°	371	1720	3001	3172	3297	232
45°	254	1372	2652	3039	3175	196
55°	182	872	2251	2615	2687	166
65°	144	462	1671	1879	1906	143
75°	106	284	917	1008	1012	111
85°	38	87	227	250	254	40
90°	3	8	22	11	11	5
95°	28	108	359	185	126	31
105°	99	150	606	921	859	105
115°	176	213	486	969	1106	173
125°	244	274	442	746	881	217
135°	291	320	428	603	683	225
145°	338	359	423	514	554	211
155°	381	392	423	464	477	175
165°	412	417	423	439	445	116
175°	428	428	425	431	431	41
180°	428	428	428	428	428	



TEST NUMBER: P936409

CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1178.5	1178.5	1178.5	1178.5	1178.5	1178.5	1178.5	1178.5	1178.5	1178.5	1178.5
2.5°	1178.5	1178.5	1186.0	1189.8	1197.4	1201.2	1208.8	1216.3	1239.1	1242.9	1250.4
5°	1148.2	1163.3	1212.6	1231.5	1284.6	1356.6	1386.9	1436.1	1538.4	1568.7	1587.6
7.5°	1102.7	1136.8	1258.0	1288.3	1420.9	1610.4	1690.0	1796.0	1959.0	2038.6	2103.0
10°	1030.7	1102.7	1318.6	1390.6	1606.7	1894.6	2042.4	2190.2	2436.5	2546.3	2588.0
12.5°	951.1	1068.5	1383.0	1481.6	1792.3	2212.9	2391.0	2554.0	2834.3	2982.1	3004.8
15°	860.1	1019.3	1443.7	1587.6	1989.3	2478.1	2675.2	2876.0	3137.5	3243.5	3270.1
17.5°	780.6	981.4	1500.5	1652.1	2140.9	2716.9	2917.7	3084.4	3296.6	3368.6	3387.6
20°	682.0	920.8	1538.4	1735.4	2300.0	2891.1	3084.4	3213.2	3357.2	3402.7	3410.2
22.5°	610.0	856.4	1561.1	1765.7	2406.2	2997.3	3160.2	3262.5	3361.0	3376.2	3379.9
25°	549.4	784.4	1557.3	1799.9	2497.1	3061.7	3186.7	3262.5	3319.3	3326.9	3326.9
27.5°	492.6	704.8	1542.2	1807.4	2565.3	3076.8	3175.4	3228.4	3254.9	3270.1	3270.1
30°	443.3	629.0	1504.3	1792.3	2595.6	3061.7	3141.2	3167.8	3194.3	3217.0	3228.4
32.5°	405.4	557.0	1447.5	1762.0	2599.4	3023.8	3080.6	3095.8	3133.7	3186.7	3205.7
35°	371.3	485.0	1383.0	1720.3	2576.6	2963.1	3001.1	3016.2	3092.0	3171.5	3198.1
37.5°	337.3	432.0	1299.7	1648.3	2542.6	2891.1	2917.7	2944.2	3061.7	3156.4	3186.7
40°	303.1	386.5	1201.2	1568.7	2489.5	2804.0	2826.7	2868.4	3023.8	3133.7	3164.0
42.5°	276.6	348.7	1095.1	1485.3	2421.3	2705.5	2739.6	2800.2	2978.3	3095.8	3129.8
45°	253.9	310.7	981.4	1371.7	2334.2	2603.2	2652.4	2735.8	2925.3	3038.9	3069.2
47.5°	231.2	284.2	863.9	1254.3	2239.4	2500.9	2565.3	2660.0	2853.3	2963.1	2989.7
50°	212.2	257.6	746.4	1129.2	2137.1	2391.0	2466.8	2565.3	2762.4	2864.7	2898.8
52.5°	197.0	234.9	636.6	1004.2	2019.6	2277.3	2364.5	2466.8	2652.4	2751.0	2773.7
55°	181.9	216.0	541.9	871.5	1898.4	2156.1	2250.8	2349.3	2531.2	2614.6	2629.7
57.5°	174.3	200.9	462.3	746.4	1769.6	2019.6	2125.8	2216.7	2387.2	2451.6	2466.8
60°	162.9	189.5	401.6	640.3	1629.3	1890.8	1981.8	2072.7	2216.7	2269.7	2281.1
62.5°	151.5	181.9	356.2	538.0	1485.3	1739.3	1830.2	1913.5	2034.8	2072.7	2087.8
65°	144.0	174.3	322.1	462.3	1337.6	1580.1	1671.0	1743.1	1841.5	1879.4	1887.0
67.5°	136.4	166.7	295.6	397.9	1189.8	1420.9	1489.2	1557.3	1633.1	1671.0	1674.8
70°	125.0	159.2	272.8	352.4	1038.2	1239.1	1296.0	1367.9	1428.6	1447.5	1458.9
72.5°	117.5	147.8	257.6	318.3	882.9	1064.8	1117.9	1159.5	1212.6	1231.5	1231.5
75°	106.1	132.6	242.5	284.2	723.7	871.5	917.0	958.7	1000.4	1007.9	996.5
77.5°	94.7	117.5	208.4	238.7	564.6	689.7	727.5	750.3	784.4	792.0	795.8
80°	79.5	102.3	162.9	185.7	409.3	507.7	534.3	553.2	583.5	583.5	591.1
82.5°	60.6	79.5	117.5	132.6	276.6	348.7	371.3	382.7	401.6	401.6	401.6
85°	37.9	49.2	75.8	87.2	166.7	212.2	227.3	231.2	246.3	250.1	250.1
87.5°	18.9	26.5	49.2	53.1	87.2	109.8	109.8	117.5	117.5	113.7	109.8
90°	2.9	5.2	7.5	8.0	12.6	18.7	21.8	19.4	14.5	10.9	10.9
92.5°	11.5	31.0	50.6	55.4	77.9	107.9	122.9	107.7	77.3	54.6	52.4
95°	27.5	63.3	99.0	108.0	191.8	303.5	359.4	320.6	243.3	185.3	178.7
97.5°	47.7	79.3	110.8	118.6	258.3	444.6	537.8	513.3	464.4	427.7	415.2
100°	63.2	91.8	120.4	127.5	282.6	489.3	592.6	594.4	598.0	600.7	585.7
102.5°	76.4	103.1	129.7	136.4	293.7	503.3	608.1	639.3	701.5	748.3	735.5
105°	98.9	121.4	144.0	149.6	301.9	504.9	606.4	676.2	815.9	920.6	913.7
107.5°	121.8	142.8	164.0	169.2	303.4	482.4	571.9	669.3	864.1	1010.3	1011.9
110°	137.3	156.3	175.3	180.1	301.1	462.5	543.2	652.1	869.9	1033.2	1040.4



TEST NUMBER: P936409

CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	152.6	170.6	188.8	193.3	301.2	445.1	517.1	628.6	851.4	1018.6	1029.6
115°	175.5	192.3	209.0	213.2	304.0	425.1	485.7	593.1	807.8	968.9	984.1
117.5°	198.2	213.4	228.6	232.4	309.6	412.7	464.2	561.2	755.0	900.3	917.2
120°	211.4	225.7	240.1	243.6	314.2	408.4	455.5	544.1	721.2	854.0	870.4
122.5°	224.4	238.8	253.1	256.8	320.8	406.2	448.9	528.7	688.1	807.7	823.9
125°	244.2	257.4	270.5	273.8	329.8	404.5	441.8	509.5	644.9	746.5	761.5
127.5°	260.2	273.5	286.8	290.1	338.7	403.4	435.7	493.9	610.2	697.4	710.0
130°	268.8	283.2	297.5	301.0	345.2	404.0	433.5	485.3	588.8	666.4	678.1
132.5°	277.8	292.1	306.4	309.9	350.5	404.5	431.4	477.8	570.5	640.0	650.5
135°	291.0	304.0	317.0	320.3	356.2	404.1	428.0	466.8	544.4	602.7	611.6
137.5°	304.5	317.4	330.2	333.5	364.8	406.6	427.4	460.2	525.8	575.0	582.4
140°	315.7	327.5	339.5	342.4	370.1	407.0	425.4	453.7	510.4	553.0	559.8
142.5°	324.3	335.3	346.3	349.0	374.5	408.4	425.4	450.3	500.1	537.5	543.4
145°	337.6	347.1	356.7	359.1	380.2	408.4	422.6	442.9	483.6	514.1	518.6
147.5°	350.8	360.0	369.4	371.7	388.6	411.3	422.6	438.6	470.6	494.6	498.4
150°	359.4	367.8	376.2	378.3	393.0	412.7	422.6	436.1	463.2	483.4	486.4
152.5°	368.3	374.7	381.0	382.6	395.9	413.7	422.6	434.1	457.3	474.6	476.9
155°	381.4	386.1	390.9	392.1	402.2	415.8	422.6	431.7	450.2	463.9	465.5
157.5°	391.2	395.8	400.5	401.6	408.6	417.9	422.6	429.7	444.0	454.7	455.7
160°	397.9	401.4	405.1	405.9	411.5	418.8	422.6	428.7	440.9	450.1	450.7
162.5°	404.5	407.2	409.8	410.5	414.5	419.9	422.6	427.7	438.0	445.8	446.4
165°	411.7	414.0	416.5	417.1	418.9	421.3	422.6	426.3	433.6	439.2	439.8
167.5°	418.2	419.4	420.5	420.8	422.4	424.4	425.4	427.8	432.7	436.3	436.6
170°	422.6	423.7	424.8	425.1	425.2	425.3	425.4	427.8	432.7	436.3	436.3
172.5°	424.8	425.1	425.3	425.4	425.4	425.4	425.4	427.3	431.2	434.0	433.8
175°	428.0	428.0	428.0	428.0	427.1	426.0	425.4	426.7	429.1	430.9	430.9
177.5°	428.0	428.0	428.0	428.0	427.3	426.5	426.0	426.9	428.9	430.3	430.0
180°	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0



TEST NUMBER: P936409

CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	1178.5	1178.5
2.5°	1258.0	1250.4
5°	1618.0	1625.6
7.5°	2178.8	2175.0
10°	2709.3	2743.3
12.5°	3095.8	3103.4
15°	3330.7	3345.9
17.5°	3421.6	3425.4
20°	3425.4	3417.9
22.5°	3383.8	3376.2
25°	3334.5	3330.7
27.5°	3289.0	3292.8
30°	3270.1	3281.5
32.5°	3270.1	3289.0
35°	3277.6	3296.6
37.5°	3273.8	3296.6
40°	3258.7	3285.2
42.5°	3217.0	3236.0
45°	3152.6	3175.4
47.5°	3069.2	3084.4
50°	2963.1	2978.3
52.5°	2830.5	2834.3
55°	2671.4	2686.6
57.5°	2500.9	2504.6
60°	2311.4	2322.8
62.5°	2110.6	2110.6
65°	1898.4	1906.0
67.5°	1678.6	1697.6
70°	1455.0	1458.9
72.5°	1235.2	1235.2
75°	1007.9	1011.7
77.5°	792.0	792.0
80°	587.4	591.1
82.5°	405.4	413.0
85°	253.9	253.9
87.5°	117.5	106.1
90°	10.9	10.9
92.5°	43.8	35.1
95°	152.4	126.1
97.5°	365.2	315.1
100°	526.2	466.5
102.5°	684.4	633.4
105°	886.3	858.9
107.5°	1018.6	1025.2
110°	1069.0	1097.6





TEST NUMBER: P936409

CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	1073.5	1117.4
115°	1045.0	1105.9
117.5°	984.7	1052.2
120°	936.0	1001.6
122.5°	888.7	953.4
125°	821.0	880.7
127.5°	760.3	810.6
130°	724.6	771.0
132.5°	692.0	733.6
135°	647.5	683.3
137.5°	611.7	641.2
140°	587.3	614.7
142.5°	567.0	590.6
145°	536.5	554.4
147.5°	513.2	528.0
150°	498.5	510.4
152.5°	485.8	494.9
155°	471.4	477.4
157.5°	460.0	464.2
160°	453.1	455.5
162.5°	448.7	450.9
165°	442.2	444.6
167.5°	437.6	438.6
170°	436.3	436.3
172.5°	432.9	432.0
175°	430.9	430.9
177.5°	429.1	428.0
180°	428.0	428.0



TEST NUMBER: P936409  
 CATALOG NUMBER: SQ4-FB-025U-100D-830-1D-UNV-STD-W-12

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.63	8.87	8.32	9.57	10.40	20.83	22.06	21.51	22.77	23.59
	3H	8.37	9.48	9.06	10.20	11.06	22.70	23.81	23.39	24.53	25.39
	4H	8.68	9.74	9.39	10.46	11.33	23.36	24.42	24.08	25.14	26.02
	6H	8.95	9.93	9.68	10.66	11.55	23.82	24.79	24.54	25.53	26.42
	8H	9.03	9.96	9.77	10.72	11.61	23.95	24.88	24.69	25.64	26.53
	12H	9.06	9.95	9.80	10.70	11.62	24.03	24.92	24.78	25.67	26.59
4H	2H	14.90	15.95	15.62	16.68	17.55	21.14	22.20	21.86	22.92	23.80
	3H	16.50	17.39	17.23	18.15	19.04	23.23	24.11	23.96	24.87	25.77
	4H	16.61	17.42	17.36	18.18	19.10	24.01	24.82	24.76	25.58	26.50
	6H	16.64	17.35	17.41	18.13	19.06	24.58	25.28	25.34	26.07	27.00
	8H	16.63	17.29	17.40	18.07	19.01	24.75	25.41	25.52	26.20	27.14
	12H	16.61	17.20	17.40	18.01	18.95	24.87	25.46	25.66	26.27	27.22
8H	4H	18.09	18.75	18.86	19.53	20.47	24.11	24.76	24.87	25.55	26.49
	6H	18.35	18.90	19.15	19.72	20.67	24.76	25.30	25.56	26.13	27.07
	8H	18.38	18.86	19.19	19.69	20.65	24.99	25.47	25.80	26.30	27.26
	12H	18.36	18.79	19.17	19.61	20.62	25.15	25.58	25.96	26.40	27.41
12H	4H	18.26	18.85	19.05	19.66	20.60	24.08	24.67	24.87	25.48	26.42
	6H	18.62	19.10	19.43	19.93	20.89	24.75	25.23	25.55	26.06	27.02
	8H	18.70	19.13	19.52	19.95	20.97	25.00	25.43	25.81	26.24	27.26