

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936509

Luminaire Tested: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936509
REPORT IS A COMBINATION OF REPORTS P933432 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14452.8 lumens
Efficiency: N/A
Efficacy: 97.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 148.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936509
CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

Luminous Intensity Polar Plot

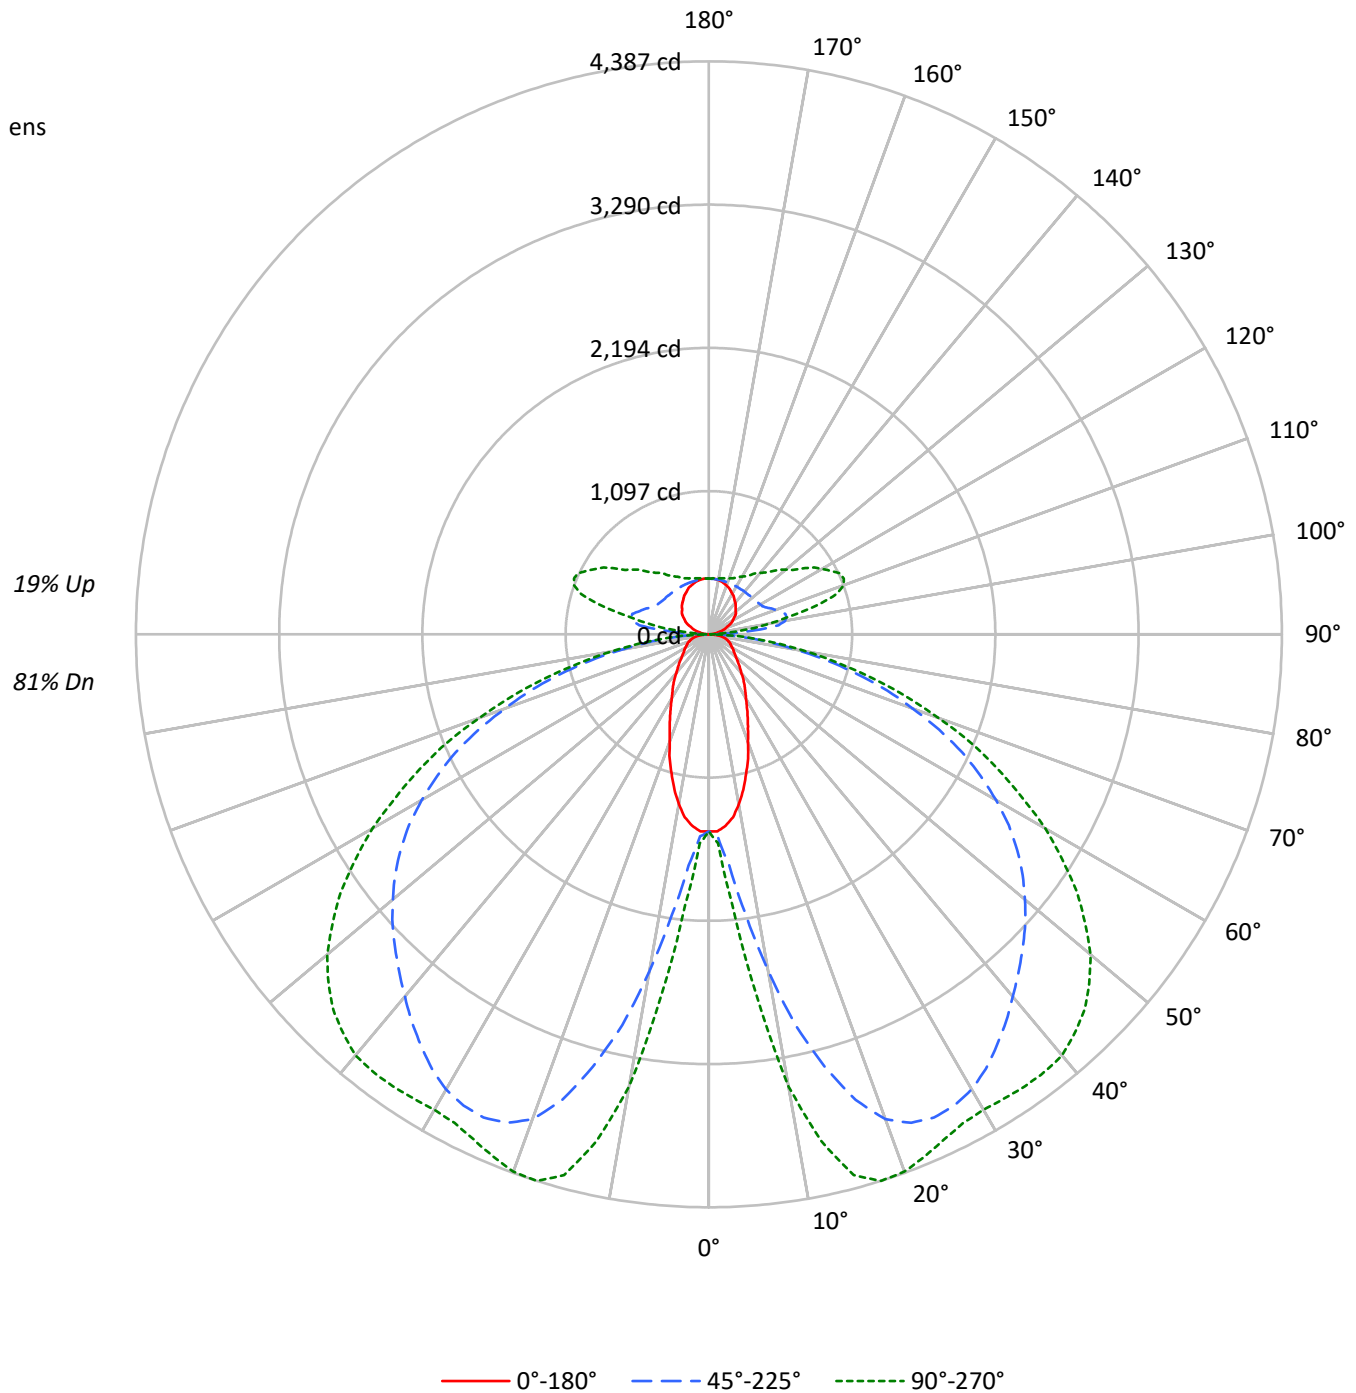



TEST NUMBER: P936509

CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	114	114	114	114	110	110	110	110	100	100	100	92	92	92	84	84	84	84	84	84	81
1	104	99	94	90	99	95	91	87	87	84	81	80	77	75	73	71	70	70	70	70	66
2	94	85	78	72	89	82	75	70	75	70	66	69	65	61	63	60	57	57	57	57	54
3	85	74	66	59	81	71	64	58	65	59	54	60	55	51	55	51	48	48	48	48	45
4	77	65	56	49	74	63	54	48	58	51	45	53	47	43	49	44	40	40	40	40	37
5	71	58	49	42	67	55	47	41	51	44	39	47	41	36	43	38	34	34	34	34	32
6	65	51	42	36	62	49	41	35	46	39	33	42	36	31	39	34	30	30	30	30	27
7	60	46	37	31	57	45	36	30	41	34	29	38	32	27	35	30	26	26	26	26	24
8	55	42	33	27	53	40	32	27	37	30	25	35	29	24	32	27	23	23	23	23	21
9	52	38	30	24	49	37	29	24	34	27	23	32	26	22	29	24	20	20	20	20	18
10	48	35	27	22	46	34	26	21	31	25	20	29	23	19	27	22	18	18	18	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4669	4669	4669
5°	4562	5397	6275
10°	4140	7869	10404
15°	3520	10284	12562
20°	2867	11920	12803
25°	2392	12477	12543
30°	2019	12559	12519
35°	1785	12354	12843
40°	1557	12086	13177
45°	1410	11891	13229
50°	1295	11717	13010
55°	1242	11459	12433
60°	1273	10961	11523
65°	1326	10201	10271
70°	1415	8902	8677
75°	1574	7265	6772
80°	1733	5045	4563
85°	1575	2681	2335

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 13229 cd/sqm



TEST NUMBER: P936509

CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.2	1.4
10°-20°	865.3	6.0
20°-30°	1513.6	10.5
30°-40°	1948.4	13.5
40°-50°	2176.4	15.1
50°-60°	2084.4	14.4
60°-70°	1651.9	11.4
70°-80°	971.4	6.7
80°-90°	271.5	1.9
90°-100°	208.6	1.4
100°-110°	548.5	3.8
110°-120°	568.7	3.9
120°-130°	456.2	3.2
130°-140°	358.0	2.5
140°-150°	274.7	1.9
150°-160°	197.9	1.4
160°-170°	121.1	0.8
170°-180°	40.9	0.3
0°-30°	2574.2	17.8
0°-40°	4522.6	31.3
0°-60°	8783.4	60.8
0°-90°	11678.2	80.8
90°-120°	1325.9	9.2
90°-150°	2414.8	16.7
90°-180°	2775.0	19.2
0°-180°	14452.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1509	1509	1509	1509	1509	
5°	1470	1577	1776	2009	2082	136
15°	1102	2034	3426	4154	4286	307
25°	704	2305	4082	4261	4266	324
35°	476	2203	3844	4062	4222	297
45°	325	1757	3397	3892	4067	252
55°	233	1116	2883	3349	3441	212
65°	184	592	2140	2407	2441	183
75°	136	364	1174	1291	1296	142
85°	49	112	291	320	325	51
90°	3	8	22	11	11	6
95°	28	108	359	185	126	31
105°	99	150	606	921	859	105
115°	176	213	486	969	1106	173
125°	244	274	442	746	881	217
135°	291	320	428	603	683	225
145°	338	359	423	514	554	211
155°	381	392	423	464	477	175
165°	412	417	423	439	445	116
175°	428	428	425	431	431	41
180°	428	428	428	428	428	



TEST NUMBER: P936509

CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1509.4	1509.4	1509.4	1509.4	1509.4	1509.4	1509.4	1509.4	1509.4	1509.4	1509.4
2.5°	1509.4	1509.4	1519.1	1524.0	1533.6	1538.5	1548.2	1557.9	1587.1	1591.9	1601.6
5°	1470.5	1489.9	1553.0	1577.3	1645.3	1737.5	1776.3	1839.4	1970.4	2009.3	2033.5
7.5°	1412.3	1456.0	1611.3	1650.2	1820.0	2062.7	2164.6	2300.5	2509.2	2611.1	2693.6
10°	1320.1	1412.3	1689.0	1781.1	2057.8	2426.6	2615.9	2805.2	3120.7	3261.4	3314.8
12.5°	1218.2	1368.6	1771.5	1897.7	2295.6	2834.3	3062.5	3271.1	3630.3	3819.6	3848.7
15°	1101.7	1305.5	1849.1	2033.5	2548.0	3174.1	3426.4	3683.7	4018.5	4154.5	4188.4
17.5°	999.8	1257.0	1921.9	2116.0	2742.1	3479.8	3737.1	3950.6	4222.4	4314.6	4338.9
20°	873.6	1179.3	1970.4	2222.8	2946.0	3703.1	3950.6	4115.6	4300.1	4358.3	4368.0
22.5°	781.3	1096.8	1999.6	2261.6	3081.9	3839.0	4047.7	4178.7	4304.9	4324.3	4329.2
25°	703.7	1004.7	1994.7	2305.3	3198.3	3921.5	4081.6	4178.7	4251.5	4261.2	4261.2
27.5°	631.0	902.8	1975.3	2315.0	3285.7	3940.9	4067.1	4135.0	4169.0	4188.4	4188.4
30°	567.9	805.6	1926.7	2295.6	3324.5	3921.5	4023.4	4057.4	4091.4	4120.5	4135.0
32.5°	519.3	713.5	1854.0	2256.8	3329.4	3872.9	3945.8	3965.2	4013.7	4081.6	4105.9
35°	475.6	621.2	1771.5	2203.4	3300.3	3795.3	3843.8	3863.3	3960.3	4062.2	4096.2
37.5°	431.9	553.2	1664.7	2111.2	3256.6	3703.1	3737.1	3771.0	3921.5	4042.8	4081.6
40°	388.2	495.0	1538.5	2009.3	3188.6	3591.5	3620.6	3674.0	3872.9	4013.7	4052.5
42.5°	354.3	446.5	1402.6	1902.5	3101.3	3465.3	3509.0	3586.6	3814.7	3965.2	4008.9
45°	325.1	398.0	1257.0	1756.9	2989.6	3334.2	3397.3	3504.1	3746.8	3892.4	3931.2
47.5°	296.1	364.0	1106.6	1606.5	2868.3	3203.2	3285.7	3407.0	3654.6	3795.3	3829.3
50°	271.8	330.0	956.1	1446.3	2737.3	3062.5	3159.5	3285.7	3538.1	3669.1	3712.8
52.5°	252.4	300.9	815.4	1286.1	2586.8	2916.9	3028.5	3159.5	3397.3	3523.5	3552.6
55°	233.0	276.7	694.1	1116.2	2431.5	2761.5	2882.9	3009.1	3242.0	3348.8	3368.2
57.5°	223.2	257.3	592.1	956.1	2266.5	2586.8	2722.7	2839.2	3057.6	3140.1	3159.5
60°	208.7	242.6	514.4	820.2	2086.9	2421.8	2538.3	2654.8	2839.2	2907.1	2921.7
62.5°	194.2	233.0	456.2	689.2	1902.5	2227.7	2344.1	2450.9	2606.2	2654.8	2674.2
65°	184.4	223.2	412.5	592.1	1713.2	2023.9	2140.3	2232.5	2358.7	2407.2	2417.0
67.5°	174.8	213.6	378.6	509.6	1524.0	1820.0	1907.3	1994.7	2091.8	2140.3	2145.2
70°	160.1	203.8	349.4	451.3	1329.8	1587.1	1659.8	1752.1	1829.7	1854.0	1868.5
72.5°	150.5	189.3	330.0	407.6	1130.9	1363.8	1431.7	1485.1	1553.0	1577.3	1577.3
75°	135.8	169.9	310.6	364.0	926.9	1116.2	1174.5	1227.9	1281.2	1291.0	1276.5
77.5°	121.3	150.5	266.9	305.7	723.1	883.3	931.8	961.0	1004.7	1014.3	1019.2
80°	101.9	131.1	208.7	237.9	524.2	650.4	684.3	708.6	747.4	747.4	757.2
82.5°	77.6	101.9	150.5	169.9	354.3	446.5	475.6	490.1	514.4	514.4	514.4
85°	48.6	63.1	97.0	111.7	213.6	271.8	291.2	296.1	315.5	320.4	320.4
87.5°	24.3	33.9	63.1	68.0	111.7	140.7	140.7	150.5	150.5	145.6	140.7
90°	2.9	5.2	7.5	8.0	12.6	18.7	21.8	19.4	14.5	10.9	10.9
92.5°	11.5	31.0	50.6	55.4	77.9	107.9	122.9	107.7	77.3	54.6	52.4
95°	27.5	63.3	99.0	108.0	191.8	303.5	359.4	320.6	243.3	185.3	178.7
97.5°	47.7	79.3	110.8	118.6	258.3	444.6	537.8	513.3	464.4	427.7	415.2
100°	63.2	91.8	120.4	127.5	282.6	489.3	592.6	594.4	598.0	600.7	585.7
102.5°	76.4	103.1	129.7	136.4	293.7	503.3	608.1	639.3	701.5	748.3	735.5
105°	98.9	121.4	144.0	149.6	301.9	504.9	606.4	676.2	815.9	920.6	913.7
107.5°	121.8	142.8	164.0	169.2	303.4	482.4	571.9	669.3	864.1	1010.3	1011.9
110°	137.3	156.3	175.3	180.1	301.1	462.5	543.2	652.1	869.9	1033.2	1040.4



TEST NUMBER: P936509

CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	152.6	170.6	188.8	193.3	301.2	445.1	517.1	628.6	851.4	1018.6	1029.6
115°	175.5	192.3	209.0	213.2	304.0	425.1	485.7	593.1	807.8	968.9	984.1
117.5°	198.2	213.4	228.6	232.4	309.6	412.7	464.2	561.2	755.0	900.3	917.2
120°	211.4	225.7	240.1	243.6	314.2	408.4	455.5	544.1	721.2	854.0	870.4
122.5°	224.4	238.8	253.1	256.8	320.8	406.2	448.9	528.7	688.1	807.7	823.9
125°	244.2	257.4	270.5	273.8	329.8	404.5	441.8	509.5	644.9	746.5	761.5
127.5°	260.2	273.5	286.8	290.1	338.7	403.4	435.7	493.9	610.2	697.4	710.0
130°	268.8	283.2	297.5	301.0	345.2	404.0	433.5	485.3	588.8	666.4	678.1
132.5°	277.8	292.1	306.4	309.9	350.5	404.5	431.4	477.8	570.5	640.0	650.5
135°	291.0	304.0	317.0	320.3	356.2	404.1	428.0	466.8	544.4	602.7	611.6
137.5°	304.5	317.4	330.2	333.5	364.8	406.6	427.4	460.2	525.8	575.0	582.4
140°	315.7	327.5	339.5	342.4	370.1	407.0	425.4	453.7	510.4	553.0	559.8
142.5°	324.3	335.3	346.3	349.0	374.5	408.4	425.4	450.3	500.1	537.5	543.4
145°	337.6	347.1	356.7	359.1	380.2	408.4	422.6	442.9	483.6	514.1	518.6
147.5°	350.8	360.0	369.4	371.7	388.6	411.3	422.6	438.6	470.6	494.6	498.4
150°	359.4	367.8	376.2	378.3	393.0	412.7	422.6	436.1	463.2	483.4	486.4
152.5°	368.3	374.7	381.0	382.6	395.9	413.7	422.6	434.1	457.3	474.6	476.9
155°	381.4	386.1	390.9	392.1	402.2	415.8	422.6	431.7	450.2	463.9	465.5
157.5°	391.2	395.8	400.5	401.6	408.6	417.9	422.6	429.7	444.0	454.7	455.7
160°	397.9	401.4	405.1	405.9	411.5	418.8	422.6	428.7	440.9	450.1	450.7
162.5°	404.5	407.2	409.8	410.5	414.5	419.9	422.6	427.7	438.0	445.8	446.4
165°	411.7	414.0	416.5	417.1	418.9	421.3	422.6	426.3	433.6	439.2	439.8
167.5°	418.2	419.4	420.5	420.8	422.4	424.4	425.4	427.8	432.7	436.3	436.6
170°	422.6	423.7	424.8	425.1	425.2	425.3	425.4	427.8	432.7	436.3	436.3
172.5°	424.8	425.1	425.3	425.4	425.4	425.4	425.4	427.3	431.2	434.0	433.8
175°	428.0	428.0	428.0	428.0	427.1	426.0	425.4	426.7	429.1	430.9	430.9
177.5°	428.0	428.0	428.0	428.0	427.3	426.5	426.0	426.9	428.9	430.3	430.0
180°	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0	428.0



TEST NUMBER: P936509

CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1509.4	1509.4
2.5°	1611.3	1601.6
5°	2072.4	2082.1
7.5°	2790.7	2785.8
10°	3470.1	3513.8
12.5°	3965.2	3974.9
15°	4266.1	4285.5
17.5°	4382.6	4387.4
20°	4387.4	4377.7
22.5°	4334.0	4324.3
25°	4270.9	4266.1
27.5°	4212.7	4217.6
30°	4188.4	4203.0
32.5°	4188.4	4212.7
35°	4198.1	4222.4
37.5°	4193.3	4222.4
40°	4173.9	4207.8
42.5°	4120.5	4144.7
45°	4038.0	4067.1
47.5°	3931.2	3950.6
50°	3795.3	3814.7
52.5°	3625.4	3630.3
55°	3421.6	3441.0
57.5°	3203.2	3208.0
60°	2960.5	2975.1
62.5°	2703.3	2703.3
65°	2431.5	2441.2
67.5°	2150.0	2174.3
70°	1863.7	1868.5
72.5°	1582.2	1582.2
75°	1291.0	1295.9
77.5°	1014.3	1014.3
80°	752.3	757.2
82.5°	519.3	529.1
85°	325.1	325.1
87.5°	150.5	135.8
90°	10.9	10.9
92.5°	43.8	35.1
95°	152.4	126.1
97.5°	365.2	315.1
100°	526.2	466.5
102.5°	684.4	633.4
105°	886.3	858.9
107.5°	1018.6	1025.2
110°	1069.0	1097.6



TEST NUMBER: P936509

CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1073.5	1117.4
115°	1045.0	1105.9
117.5°	984.7	1052.2
120°	936.0	1001.6
122.5°	888.7	953.4
125°	821.0	880.7
127.5°	760.3	810.6
130°	724.6	771.0
132.5°	692.0	733.6
135°	647.5	683.3
137.5°	611.7	641.2
140°	587.3	614.7
142.5°	567.0	590.6
145°	536.5	554.4
147.5°	513.2	528.0
150°	498.5	510.4
152.5°	485.8	494.9
155°	471.4	477.4
157.5°	460.0	464.2
160°	453.1	455.5
162.5°	448.7	450.9
165°	442.2	444.6
167.5°	437.6	438.6
170°	436.3	436.3
172.5°	432.9	432.0
175°	430.9	430.9
177.5°	429.1	428.0
180°	428.0	428.0



TEST NUMBER: P936509
 CATALOG NUMBER: SQ4-FB-025U-125D-830-1D-UNV-STD-W-12

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.79	10.09	9.42	10.74	11.49	21.98	23.28	22.61	23.93	24.68
	3H	9.52	10.70	10.17	11.36	12.14	23.86	25.03	24.50	25.69	26.48
	4H	9.84	10.96	10.51	11.63	12.42	24.52	25.64	25.19	26.31	27.10
	6H	10.12	11.15	10.79	11.83	12.64	24.98	26.01	25.66	26.70	27.51
	8H	10.20	11.18	10.88	11.88	12.70	25.12	26.10	25.81	26.81	27.62
	12H	10.23	11.17	10.92	11.87	12.71	25.20	26.14	25.90	26.84	27.68
4H	2H	16.06	17.18	16.73	17.85	18.64	22.30	23.42	22.97	24.09	24.88
	3H	17.67	18.60	18.35	19.31	20.13	24.39	25.33	25.07	26.04	26.85
	4H	17.78	18.63	18.48	19.35	20.19	25.18	26.04	25.88	26.75	27.59
	6H	17.82	18.56	18.53	19.30	20.15	25.75	26.50	26.47	27.23	28.09
	8H	17.81	18.50	18.53	19.24	20.10	25.93	26.62	26.65	27.36	28.23
	12H	17.79	18.41	18.53	19.17	20.04	26.05	26.68	26.79	27.43	28.31
8H	4H	19.27	19.96	19.99	20.70	21.56	25.28	25.98	26.00	26.71	27.58
	6H	19.53	20.11	20.28	20.89	21.76	25.94	26.51	26.69	27.29	28.16
	8H	19.56	20.07	20.32	20.85	21.73	26.17	26.68	26.93	27.46	28.34
	12H	19.54	20.00	20.31	20.77	21.71	26.33	26.79	27.10	27.56	28.50
12H	4H	19.43	20.06	20.18	20.82	21.69	25.26	25.88	26.00	26.64	27.51
	6H	19.80	20.31	20.56	21.09	21.98	25.92	26.44	26.69	27.22	28.10
	8H	19.89	20.34	20.66	21.11	22.06	26.18	26.64	26.95	27.40	28.35