

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P520400

Luminaire Tested: **SQ4-F-150U-075D-930-1D-UNV-STD-W-4**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P520400
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-25, G3-1910-536-18)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-F-150U-075D-930-1D-UNV-STD-W-4
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7153.1 lumens
Efficiency: N/A
Efficacy: 112.6 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.35
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 63.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P520400
CATALOG NUMBER: SQ4-F-150U-075D-930-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

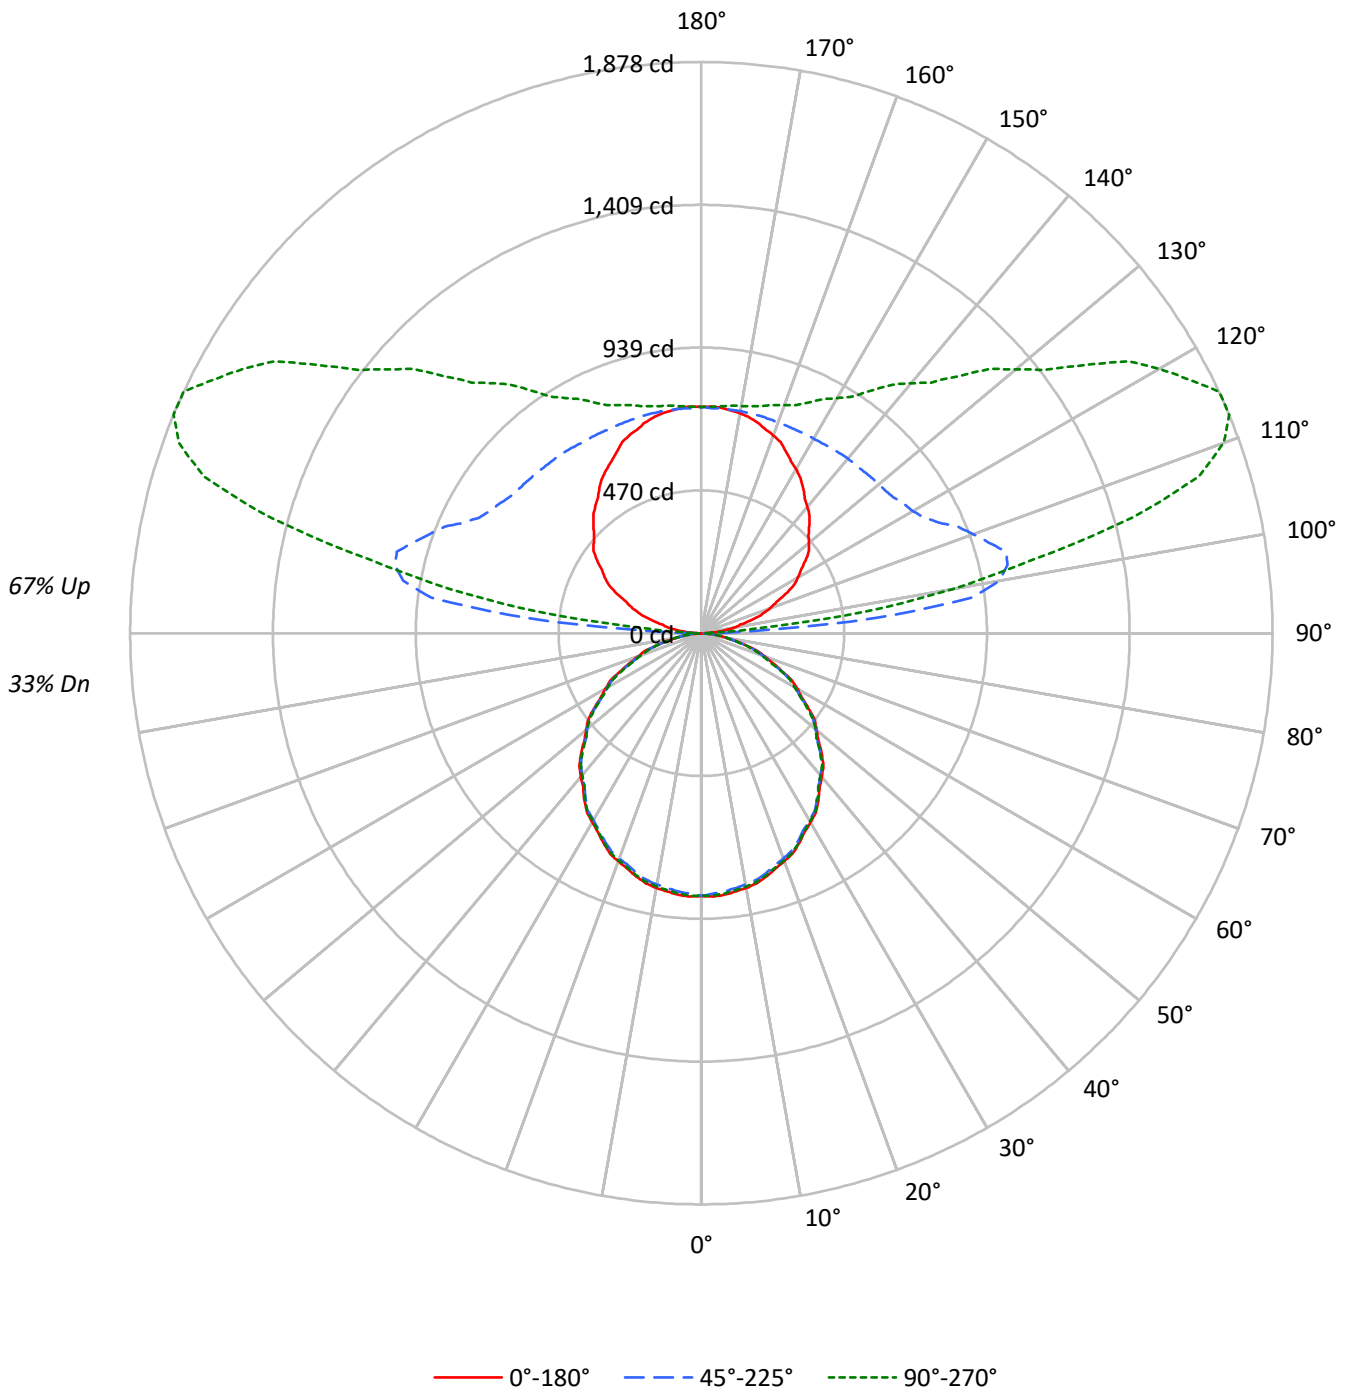



TEST NUMBER: P520400

CATALOG NUMBER: SQ4-F-150U-075D-930-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33
1	94	90	86	83	85	81	78	75	65	62	60	50	48	47	36	35	34	28
2	85	78	72	67	77	71	66	61	57	53	50	43	41	39	31	30	29	23
3	78	69	62	56	70	62	56	51	50	45	42	38	35	33	28	26	24	20
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21	17
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	20	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	18	16	13
7	55	43	36	30	50	39	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	26	46	36	29	24	29	24	20	23	19	16	17	14	13	10
9	48	36	28	23	43	33	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7969	7969	7969
5°	7999	7898	7956
10°	7967	7865	7923
15°	7906	7809	7875
20°	7835	7742	7804
25°	7749	7669	7725
30°	7650	7567	7608
35°	7550	7471	7506
40°	7423	7347	7337
45°	7295	7204	7223
50°	7092	7036	7036
55°	6928	6840	6777
60°	6704	6589	6532
65°	6342	6224	6137
70°	5956	5808	5662
75°	5361	5165	5051
80°	4288	4203	4160
85°	2572	2911	2975



TEST NUMBER: P520400

CATALOG NUMBER: SQ4-F-150U-075D-930-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.5	1.1
10°-20°	232.1	3.2
20°-30°	348.7	4.9
30°-40°	416.1	5.8
40°-50°	426.7	6.0
50°-60°	380.2	5.3
60°-70°	283.5	4.0
70°-80°	153.7	2.1
80°-90°	36.9	0.5
90°-100°	345.5	4.8
100°-110°	934.2	13.1
110°-120°	982.2	13.7
120°-130°	797.8	11.2
130°-140°	625.8	8.7
140°-150°	480.3	6.7
150°-160°	345.5	4.8
160°-170°	211.0	3.0
170°-180°	71.1	1.0
0°-30°	662.3	9.3
0°-40°	1078.4	15.1
0°-60°	1885.3	26.4
0°-90°	2359.5	33.0
90°-120°	2262.0	31.6
90°-150°	4166.0	58.2
90°-180°	4794.0	67.0
0°-180°	7153.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	864	864	864	864	864	
5°	864	862	853	860	859	82
15°	828	826	818	824	824	233
25°	761	760	753	757	759	351
35°	670	669	663	663	666	419
45°	559	557	552	552	554	430
55°	431	430	425	421	421	385
65°	290	290	285	282	281	289
75°	150	147	145	142	142	158
85°	24	26	28	28	28	34
90°	2	5	10	11	10	4
95°	54	188	575	297	177	56
105°	174	268	1036	1529	1466	183
115°	306	374	860	1664	1878	302
125°	419	480	775	1307	1536	373
135°	502	561	754	1056	1195	388
145°	584	627	744	904	972	365
155°	659	684	737	810	837	304
165°	717	724	740	769	773	202
175°	744	744	741	751	749	71
180°	744	744	744	744	744	



TEST NUMBER: P520400

CATALOG NUMBER: SQ4-F-150U-075D-930-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	863.7	863.7	863.7	863.7	863.7
2.5°	866.9	865.0	857.5	863.7	863.1
5°	863.7	862.2	852.8	859.8	859.0
7.5°	856.7	855.0	845.7	852.8	852.6
10°	850.4	848.2	839.5	846.5	845.7
12.5°	842.3	840.0	831.3	838.3	837.5
15°	827.7	826.2	817.6	823.9	824.5
17.5°	811.1	808.2	800.4	806.5	807.3
20°	798.0	795.6	788.5	794.0	794.8
22.5°	784.2	781.8	774.8	780.3	781.0
25°	761.2	760.4	753.3	757.2	758.8
27.5°	736.3	734.1	728.4	731.5	732.9
30°	718.1	716.6	710.3	712.7	714.1
32.5°	699.3	698.4	692.7	693.9	696.0
35°	670.3	668.8	663.3	663.4	666.4
37.5°	638.2	636.5	632.0	631.2	632.5
40°	616.3	614.0	610.0	609.2	609.2
42.5°	593.7	592.0	586.8	585.4	587.3
45°	559.1	556.8	552.1	552.1	553.6
47.5°	521.7	520.8	515.3	512.8	513.4
50°	494.1	495.7	490.2	487.1	490.2
52.5°	470.3	469.4	464.5	461.4	462.6
55°	430.7	429.9	425.2	421.3	421.3
57.5°	390.9	388.9	384.0	381.1	383.4
60°	363.3	362.6	357.1	351.6	354.0
62.5°	335.8	334.4	328.9	325.3	327.0
65°	290.5	290.5	285.1	281.9	281.1
67.5°	250.9	247.2	244.1	240.4	239.3
70°	220.8	217.8	215.3	212.2	209.9
72.5°	191.4	189.5	185.9	182.7	182.3
75°	150.4	147.3	144.9	142.5	141.7
77.5°	107.0	106.4	104.1	102.9	103.3
80°	80.7	80.7	79.1	79.1	78.3
82.5°	56.9	57.5	57.2	55.9	55.8
85°	24.3	25.8	27.5	27.5	28.1
87.5°	4.7	8.4	9.0	9.1	9.0
90°	1.6	4.7	10.4	11.2	10.4
92.5°	22.7	82.8	163.5	70.9	51.4
95°	53.6	188.2	574.6	297.4	176.9
97.5°	86.1	215.9	895.7	741.3	544.3
100°	110.5	227.1	995.6	1038.3	839.5
102.5°	132.9	242.5	1030.8	1263.5	1114.8
105°	173.6	268.4	1036.4	1528.8	1466.2
107.5°	211.5	297.9	991.1	1694.3	1715.1
110°	240.9	319.1	950.8	1738.7	1827.2



TEST NUMBER: P520400

CATALOG NUMBER: SQ4-F-150U-075D-930-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	267.2	340.4	913.6	1729.8	1878.4
115°	305.7	373.8	859.5	1663.9	1878.4
117.5°	343.5	407.3	823.8	1563.3	1806.3
120°	366.6	429.2	802.7	1491.1	1739.0
122.5°	388.3	449.7	789.9	1413.6	1663.5
125°	418.6	479.6	774.7	1307.3	1535.8
127.5°	446.5	506.3	765.8	1220.6	1421.6
130°	461.7	523.6	761.9	1166.9	1348.5
132.5°	477.7	539.0	758.1	1118.7	1285.8
135°	501.8	561.2	753.9	1055.6	1194.9
137.5°	525.9	582.2	750.4	1004.4	1117.9
140°	542.6	595.0	749.1	971.5	1072.4
142.5°	558.6	607.9	746.5	941.7	1030.1
145°	583.5	627.2	743.5	903.5	972.4
147.5°	606.0	644.8	740.0	868.9	921.8
150°	622.6	657.1	738.7	850.1	892.3
152.5°	638.0	668.1	738.1	832.7	867.4
155°	658.6	684.5	737.1	810.5	837.2
157.5°	680.1	698.2	737.3	795.1	812.6
160°	692.3	707.1	737.9	785.4	797.9
162.5°	701.9	714.3	738.5	777.6	787.0
165°	717.1	724.1	740.3	769.2	773.1
167.5°	727.5	732.4	740.4	761.9	763.8
170°	733.9	736.3	741.1	758.7	758.7
172.5°	739.0	739.5	741.1	754.9	754.2
175°	744.3	743.5	741.1	750.7	749.1
177.5°	746.0	744.1	740.9	747.2	745.4
180°	743.5	743.5	743.5	743.5	743.5

(END OF REPORT)